

BABY LOCK SEWING ACCESSORIES

Felling Foot

(ESG-FF)

Instructions

The Baby Lock Felling Foot has a 4mm underfoot groove which is perfect for making flat felled seams and for turning narrow edges and hems on lightweight fabrics.


A flat felled seam is the preferred seam for men's and women's shirts and children's casual garments. In a felled seam, the fabric seam allowances are both encased and stitched with a double row of topstitching.

MACHINE SETTINGS

Stitch:	Straight stitch
Stitch length:	2-2.5mm

Here's how to make a perfect felled seam with your Baby Lock Felling Foot:

1. Place wrong sides of your fabric together and stitch a 5/8" seam, using a stitch length of 2-2.5mm. Press the seam to one side. Trim the lower seam allowance to 3/8."
2. Turn the top seam allowance under 1/4" and press.
3. Place the fold in the groove of the foot. Edge stitch, guiding the fold to the inside edge of the curl in the felling foot.

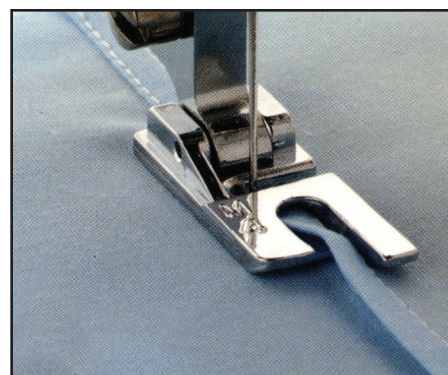

FOR THE LOVE OF SEWING