









Stark Energy Batteries // SRK-533

Canada Tough – 365 Days a Year

	Nominal Capacity
	533 Ah
	Voltage
	6 Volt
	Electrolyte
	AGM
	Weight
	57 Kg / 126 Lbs
	Terminal Type
	F14 (M8) / F22 (M8)
	Warranty
	3 Years



STARK ENERGY BENEFITS:

- Sealed lead acid battery classified as non-hazardous material per IMDG
- Can ship via Purolator or DHL and approved for air transport by IATA
- Individually boxed for safe transport right to your work site
- Every battery is equipped with lifting handles
- Hardware, and terminal covers included

Stark Energy AGM batteries are built to power equipment 365 days a year. Unlike most AGM standby batteries, Stark Energy comes from a high cycling lineage. Designed specifically for solar and EV applications, they can withstand repeated cycles of over 300 at 100% discharge and many times that at shallower cycle depth.

The advanced AGM design and spill-proof construction allow for multiple operating positions (except upside down). They can also operate at -20C. Best of all, these batteries are maintenance-free. Over 20,000 Stark batteries are reliably powering equipment all over Canada – don't settle for anything else.



Stark Energy Batteries // SRK-533

Canada Tough – 365 Days a Year

PERFORMANCE SPECIFICATIONS

Nominal Voltage		6 Volts
Nominal Capacity		25°C
1 Amp rate		533 Ah
100-hr.		460 Ah
20-hr.		424 Ah
10-hr.		400 Ah
Internal Resistance (approx.)		1.1mΩ
Resting Discharge Rate (@ 20 °C)		
3 Months	6 Months	12 Months
88%	77%	57%
Charge Method		(Constant Voltage)
Cycle Use (Repeating Use)		
Cold Crank Amps		800 CCA
Control Voltage		7.3 - 7.4 V
Float Use (Control Voltage)		6.8 - 6.9 V
AGM Operational Temperature		
Discharge		-20°C to 60°C
AGM Storage Temperature		-20°C to 60°C

CAPACITY FACTORS WITH DIFFERENT TEMPERATURES (20 HOUR RATE)

40°C	25°C	0°C	-20°C
107%	100%	76%	46%

BATTERY CARE & STORAGE


CARE:

- Active users charge daily; occasional users charge battery before any outing, after active use or every 90 days if no use
- Only use with a specified charger. Only use appropriate charger to charge AGM batteries as charging rates differ.
- Never use an automotive or wet type charger on an AGM battery
- Top Charge your battery frequently and/or leave on a charger/maintainer.


STORAGE:

- Batteries should always be stored fully charged in a cool and dry place to maintain maximum service life
- Depending on storage temperatures, batteries hold their charge for 3 to 9 months until recharge is necessary. Above 30°C (86°F), recharge at 9 months. Above 40°C (104°F), recharge at 3 months. Do not store above 40°C (104°F)
- If a battery is stored for 9 months or longer without being charged, its service life may be shortened.
- Never store batteries in a sealed environment or incorporate into a sealed structure/enclosure without adequate ventilation

OPEN CIRCUIT VOLTAGE VS. RESIDUAL CAPACITY

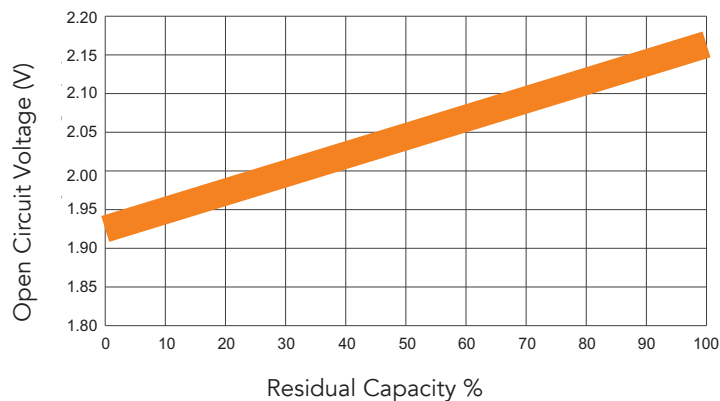

LIFE CHARACTERISTICS OF CYCLE USE

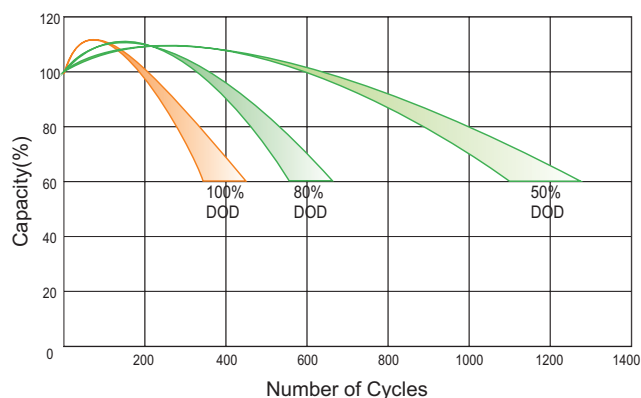

DIMENSIONS

