

# DuraFlood Round

## LED Sportslighters




- » UL Listed
- » 100-277 VAC and 277-480 VAC Options
- » Die-cast aluminum housing w/ black powder coat finish for corrosion resistance and heat dissipation
- » IP66 Wet Location Rated
- » 5 year limited replacement warranty
- » HD Yoke Mount standard




| Power                                     | 500W                                                             | 600W                                                                                                                                 | 1200W                                                                                                                                    |
|-------------------------------------------|------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| Lumens                                    | 75,000                                                           | 90,000                                                                                                                               | 150,000                                                                                                                                  |
| 100-277 VAC<br>Beam Angle:<br>Part Number | 30° Beam: DFR500Y-BLK-30D5K<br>60° Beam: DFR500Y-BLK-60D5K       | 15° Beam: DFR600Y-BLK-15D5K<br>30° Beam: DFR600Y-BLK-30D5K<br>45° Beam: DFR600Y-BLK-45D5K<br>60° Beam: DFR600Y-BLK-60D5K             | 15° Beam: DFR1200Y-BLK-15D5K<br>30° Beam: DFR1200Y-BLK-30D5K<br>40° Beam: DFR1200Y-BLK-40D5K<br>60° Beam: DFR1200Y-BLK-60D5K             |
| 277-480 VAC<br>Beam Angle:<br>Part Number | 30° Beam: DFR500Y-BLK-30D5K-4V<br>60° Beam: DFR500Y-BLK-60D5K-4V | 15° Beam: DFR600Y-BLK-15D5K-4V<br>30° Beam: DFR600Y-BLK-30D5K-4V<br>45° Beam: DFR600Y-BLK-45D5K-4V<br>60° Beam: DFR600Y-BLK-60D5K-4V | 15° Beam: DFR1200Y-BLK-15D5K-4V<br>30° Beam: DFR1200Y-BLK-30D5K-4V<br>40° Beam: DFR1200Y-BLK-40D5K-4V<br>60° Beam: DFR1200Y-BLK-60D5K-4V |
| Dimensions                                | 15.2" x 14.2" x 16.9"                                            |                                                                                                                                      | 18.6" x 18.3" x 19.3"                                                                                                                    |
| Weight                                    | 36.1 lbs                                                         |                                                                                                                                      | 56.9 lbs                                                                                                                                 |
| Max EPA                                   | 1.57                                                             |                                                                                                                                      | 4.03                                                                                                                                     |
| Operating Temperature                     | -40° F to 122° F                                                 |                                                                                                                                      |                                                                                                                                          |
| CCT                                       | 5000K                                                            |                                                                                                                                      |                                                                                                                                          |
| CRI                                       | Ra > 70                                                          |                                                                                                                                      |                                                                                                                                          |
| Mount                                     | Heavy Duty Yoke                                                  |                                                                                                                                      |                                                                                                                                          |
| Dimming                                   | 0-10V DC                                                         |                                                                                                                                      |                                                                                                                                          |
| LED Type                                  | 5050 SMD                                                         |                                                                                                                                      |                                                                                                                                          |
| Driver                                    | Inventronics / Sosen                                             |                                                                                                                                      |                                                                                                                                          |
| Surge Protection                          | 10 kV Standard                                                   |                                                                                                                                      |                                                                                                                                          |
| Lifespan                                  | > 50,000 Hours                                                   |                                                                                                                                      |                                                                                                                                          |
| Warranty                                  | 5 Year Limited Replacement                                       |                                                                                                                                      |                                                                                                                                          |

## DIMENSIONS

### 500W AND 600W- SHOWN WITH OPTIONAL SLEEVE MOUNT

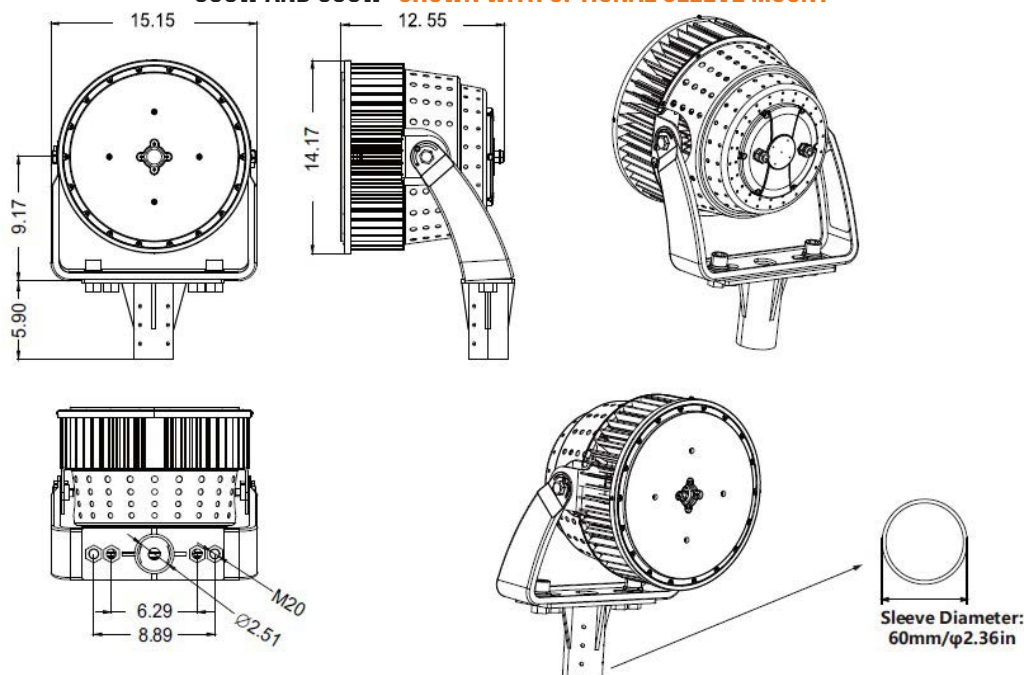

### 1200W

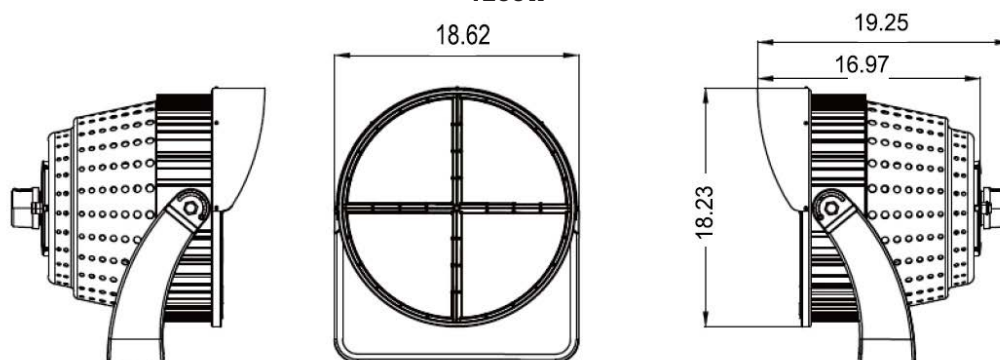

## SLEEVE MOUNT

### TENON ADAPTER FOR DURAFLOOD ROUND

- » Available separately for all DuraFlood Round fixtures
- » Steel Construction with black powdercoat finish
- » Fits over standard 2-3/8" tenon and bolts securely to fixture yoke mount for increased versatility