

The Toughest Fitness and Weight Room Flooring Available!

ResiTough™ Flooring Specifications:

1. Roll Dimension [48" (1219 mm) x 1/4" (6 mm) standard];
[48" (1219 mm) x 3/8" (8 mm) standard].
 - a. Roll Weight [1/4" 1.5 lb/ft² (6.1 kg/m²); 3/8" 1.95 lb/ft² (9.6 kg/m²)].
 - b. Roll Length: [Specify roll length].
2. Tile Dimension [23" (584.2 mm) x 23" (584.2 mm) x 3/8" (8 mm) standard];
 - a. Tile Weight: [1.95 /lb/ft² (approx: 7.16 lbs /tile)]
3. Colors: [Specify color from Resilite's standard color selection.].
4. Product Testing:
 - a. Tensile Strength, lb/in² (ASTM D412): 200 min.
 - b. Flexibility, 1/4-inch mandrel (ASTM F137): pass.
 - c. Static Load, 1000 lb/in² (ASTM F970): less than 0.020 in.
 - d. Coefficient of Friction (ASTM 2047): greater than 0.9.
 - e. Chemical Resistance (ASTM F925):
 1. 5% Acetic Acid: No Change
 2. 70% Isopropyl Alcohol: No Change
 3. 5% Sodium Hydroxide: No Change
 4. 5% Hydrochloric Acid: No Change
 5. 5% Ammonia: No Change
 6. Bleach: No Change
 7. 5% Phenol: No Change
 8. Sulfuric Acid: No Change
 - f. Ambient Noise Reduction, Sabin/ft² (ASTM C423): 0.10.
 - g. Thermal Conductivity, BTU-in/hr-ft²-°F (ASTM C518): approximately 0.406.
 - h. Impact Insulation Class (ASTM E492): 45 minimum.
 - i. Sound Transmission Coefficient (ASTM 413): 45 minimum.
5. Warranty: ResiTough Flooring shall be guaranteed 1-year from date of shipment.

ResiTough
FLOORING



1•800•THE•MATS | WWW.RESILITE.COM



1•800•THE•MATS | WWW.RESILITE.COM


ResiTough FLOORING

ResiTough Flooring is manufactured in the U.S.A. using only the highest quality, recycled rubber and brightly colored EPDM rubber flecks available. These raw materials are made from 100% post-consumer and 30% pre-consumer materials and will outlast traditional foam flooring products.

- Protects Flooring
- 23" square tiles make it easy to handle and relocate.
- Precision-cut interlocking joints won't pull apart or disconnect.
- 4' wide rolls create a seamless installation.
- Non-slip surface in both wet & dry locations.
- Reduces noise & vibrations.
- Commercial-grade product is extremely durable.
- Standard colors available - seamless appearance.
- Easy to Install!
- Easy Maintenance - sweep, vacuum or mop.
- Made in the USA!

RESILITE™
Sports Products, Inc.

1•800•THE•MATS
WWW.RESILITE.COM

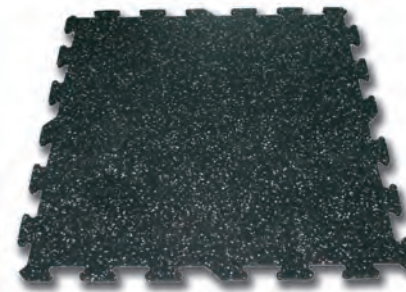

ResiTough 23" Square Interlocking Tiles:
Each tile is 23" x 23" x 8mm thick and available in your choice of three colors. Edge mats and corners have a straight edge provide and easy-to-install and professional look. Customize your fitness area or locker room.

Color Choices: BLACK, GREY SPECKLED, BLUE SPECKLED



ResiTough 4' Wide Rolls:

For larger areas or to create a seamless look, our ResiTough Flooring is available in 4-ft wide rolls. Seven color choices to select from. Rolls can easily be installed using flooring adhesive. ResiTough Flooring is durable enough to be installed in a variety of areas, including weight rooms, fitness and strength training areas and even in hall ways or offices.

Color Choices 1/4" thickness: BLACK, GREY SPECKLED, BLUE SPECKLED


Color Choices 8mm thickness: BLACK, GREY SPECKLED, BLUE SPECKLED, RED SPECKLED, GREEN SPECKLED, BRICK RED SPECKLED, and BLUE/GREY SPECKLED




ResiTough™ Flooring Colors:



BLACK

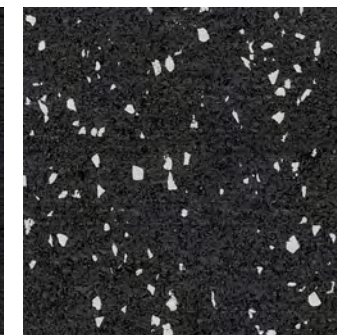


GREY SPECKLED

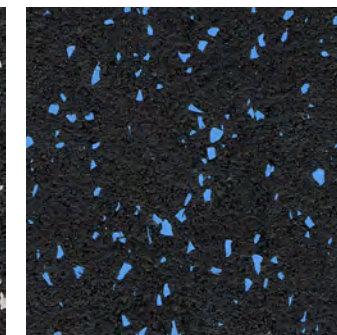


BLUE SPECKLED



BRICK RED SPECKLED

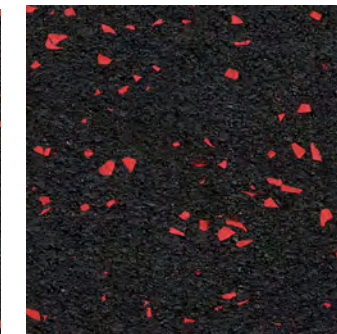

RED SPECKLED

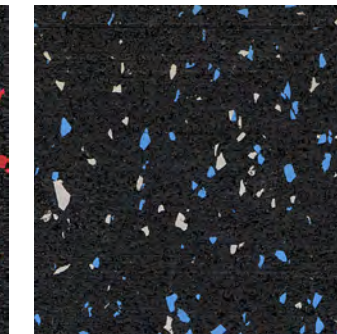

BLUE/GREY SPECKLED

COMMON APPLICATIONS:

- School Facilities
- Weight Rooms
- Exercise and Workout Areas
- Home Gyms
- Fitness & Health Clubs
- Locker Rooms
- Commercial and/or Industrial