

EMS9026

FOTILE RANGE HOOD


FOTILE W



Specification

Product Size(WxDxH)(mm):	896x515x(640-960)
Voltage/frequency:	220-240V 50Hz
Motor Power(W):	270W
IEC Air Flow(m³/h):	1250
Gear:	Turbo+2
Noise Level(dB):	High:52 Low:47
Max Static Pressure(Pa):	400
LED Light Power(W):	2W*1
Minimum Installation height(mm):	Distance between hob and rangehood:650
Ducting Size(mm):	180

IEC61591:International standard for air volume testing

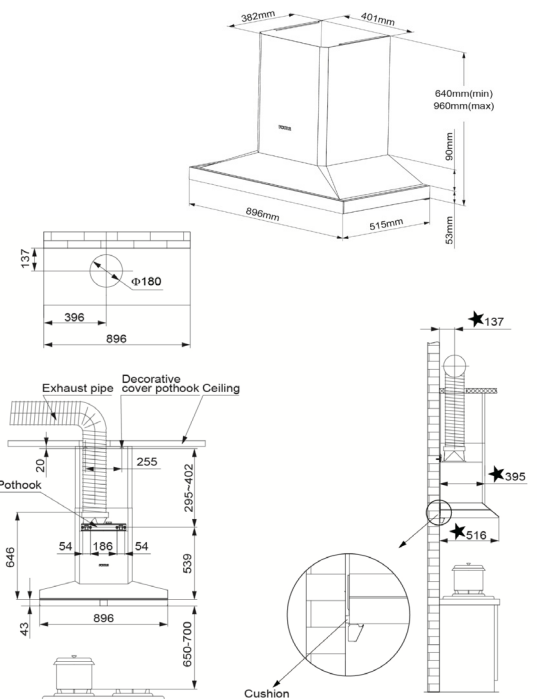

Product installation and cabinet collocation figure diagram (★ is the distance from the wall)



High Efficiency & Silence-Extraction

Enjoy cooking in quiet kitchen just like a library.



DPS Turbo Technology

Static pressure can reach 400Pa to effectively overcome flue congestion and counteract air resistance and outside interference.



AIS Intelligent Self-Adjusting Technology

Fotile W Pro range hood can intelligently adjust its settings to move the wing-like surround suction plate closer to the Golden Collection Zone. Grease and smoke are controlled at the source.



Smart Drive

Intelligent Smoke Extraction Technology
Seamless Smoke Extraction; Quieter Cooking
Auto Turbo fights the tough fumes

Warranty

Two year On-Site Warranty (including parts and labour); motor (all models) and adjustable elevation rods are covered by a ten-year (parts only) warranty.