


NOTES:

1. RECOMMENDED MINIMUM 18" CLEARANCE ALL AROUND SPA, UNLESS OTHERWISE SPECIFIED.
 2. (2) SYMBOL SHOWS 8 OPTIONAL INTERIOR PERIMETER LIGHT LOCATIONS.
 3. IF EQUIPPED, OZONATOR IS LOCATED BEHIND PANEL ON THE PUMP/PACK SIDE.
 4. DRAIN VALVE LOCATED BEHIND PANEL ON THE PUMP/PACK SIDE
 5. SEE OWNERS MANUAL FOR COMPLETE LOCATING , ELECTRICAL AND SAFETY INSTRUCTIONS.
 6. LOAD: 160 PSF
- *COVER LIFTER AND STEP ARE PART OF SUITE PACKAGE.

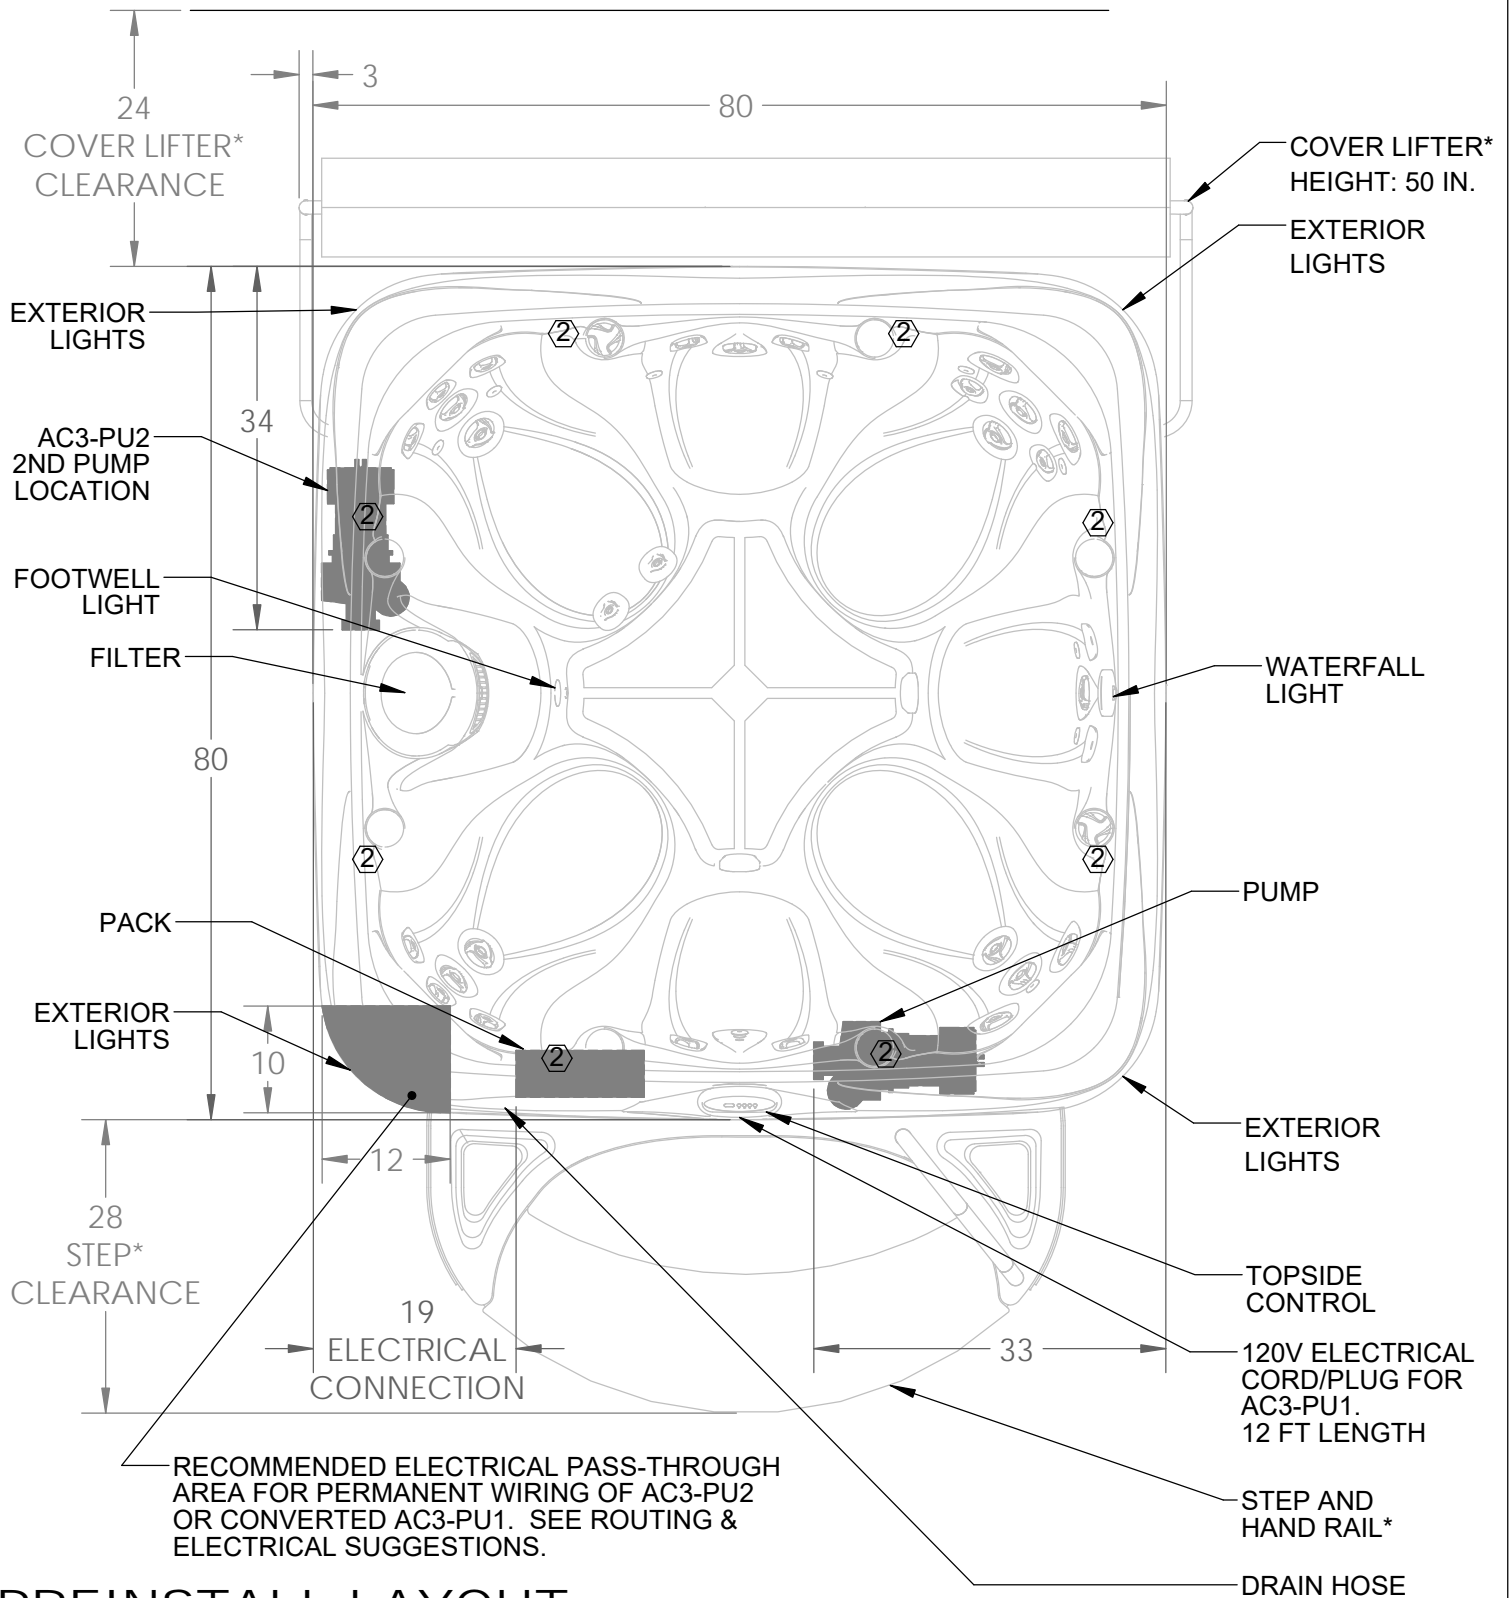

**PREINSTALL LAYOUT
CROSSOVER 730S (AC3-PU1)
CROSSOVER 740S (AC3-PU2)
SUITE PACKAGE**