

# OmegaFlex®

As the market leader, OmegaFlex® are at the forefront of product development; bringing you the best products on the market backed up by unparalleled support.



**TracPipe®**  
Flexible Gas Piping by Omega Flex®

**TracPipeCC®**  
Flexible Gas Piping by Omega Flex® Complete Containment

# Benefits of TracPipe® and TracPipeCC®

With safety our highest priority, we have worked hard to develop products that not only offer you superior gas piping, but also offers huge benefits, enabling you to work more efficiently, with unrivalled support and training.

## Market Leaders

TracPipe® is the market leading product in the UK and has been since its introduction in 2000. With the introduction of TracPipeCC® in 2018, OmegaFlex® once again demonstrated how its innovative products will help shape the industry for years to come.

## Support & Training

Technical expertise and product support has always been a fundamental philosophy of OmegaFlex®. Our team of experts have extensive experience in the gas industry and are able to offer free of charge support both via the technical helpline and with onsite visits.

## Quality

Safety is paramount so the products we manufacture will always be of the highest quality. TracPipe® and TracPipeCC® are made from the best quality materials and are continually robustly tested in accordance with our ISO 9001: 2015 Quality Procedures.

## Money Saving

TracPipe® and TracPipeCC® are up to 3 times faster to install than rigid pipe materials meaning you can save time on installation costs. Both products also typically have superior gas flow rates than comparable products in the market place, offering the potential to make increased savings by reducing the diameter. As part of our support we offer a pipework sizing service, also free of charge.



MADE IN  
BRITAIN



# Committed to world class manufacturing and support

**Established in 1975, OmegaFlex® is a product and engineering-driven company committed to meeting the most stringent performance requirements for all of its customers.**

In 2000, OmegaFlex® Limited was established in the UK, when TracPipe® tubing was brought to the UK market. Since 2007, TracPipe® (and now TracPipeCC®) have been manufactured in the UK from where it is shipped across UK, Europe and worldwide.

With World Class manufacturing comes World Class support! Customer service, technical expertise and product support is always available from our team of experts. As a UK based business, we are able to offer support via the customer service and technical helplines as well as with onsite visits. We also offer free of charge training to users and specifiers.

## **Choose TracPipe® and TracPipeCC® to replace copper and steel:**

- For ease and speed of installation
- Run long, continuous lengths direct from meter to appliance - No joints
- TracPipe® range of AutoFlare® fittings integrate directly to rigid pipe materials
- Durable and light weight
- Semi-rigid and flexible
- Bends and conforms by hand
- Cuts with a standard stainless steel tube cutter
- No threading or hot works needed
- TracPipe® and TracPipeCC® can be used for direct burial without the need for additional mechanical or corrosion protection.

**4 times lighter  
than rigid  
steel pipe**

**Market  
leaders in the  
UK since 2000**

**4 times more  
resistant to  
on-site damage**

# Smart installers don't cut corners

**TracPipe® is a BSI Kitemarked stainless steel semi-rigid gas piping system and has been manufactured in Banbury, Oxfordshire, since 2007.**

TracPipe® can be directly buried in the ground or screed and used externally above ground without the need for additional mechanical and corrosion protection. TracPipe® also has a 2 hour fire rating when installed in continuous lengths (no joints) and can be routed within fire protected shafts, corridors and lobbies.

TracPipe® is typically three times faster to install compared with traditional rigid steel or copper pipe installation – ideal for installers looking for a competitive advantage by reducing labour time in a challenging marketplace. It has become recognised as the perfect alternative to rigid pipework installed between the meter and a fixed appliance. It is easy to cut and bend by hand, and requires no soldering, welding or special tools.

TracPipe® is supplied in sizes from DN12 to DN50 with lengths of up to 90m as standard with longer lengths available as special orders. TracPipe® KITS are available in sizes DN15, DN22, DN28 and DN32 in 5, 10 and 15 metre lengths.



**TracPipe® has been used in over 10,000 locations across the UK**

**Fit up to 3 times faster than with copper pipe**

# We've got something new up our sleeve



**TracPipeCC® is the original TracPipe® but it has a second polyethylene outer cover over the length of the product.**


TracPipeCC®, which has been independently assessed by BSRIA, a leading independent UK laboratory for testing and performance verification of building services products, is designed to overcome the need to install an additional secondary containment sleeve as the product is produced with the secondary containment already in place.

TracPipeCC® is available in sizes DN15 to DN50 and is supplied on reels of varying standard lengths with longer lengths available as special orders.

## Advantages of using TracPipeCC®

- TracPipeCC® negates the need to install a secondary containment sleeve through unventilated voids.

- TracPipeCC® can be used on horizontal and importantly also on vertical runs as the ridges on the internal surface offer support to the internal pipe whilst also maintaining the channels for free movement of gas should there be an escape.
- TracPipeCC® is suitable for use in fire protected areas such as protected shafts, escape corridors and lobbies when installed in continuous lengths (without joints).
- TracPipeCC® still bends by hand with no specialist tools or hot work required.
- TracPipeCC® is still faster to install than rigid material such as copper and steel.
- TracPipeCC® can be supported with standard clips/brackets as well as on cable trays or baskets.
- TracPipeCC® can also be used in all of the usual applications for TracPipe® including for direct burial in the ground and screed.

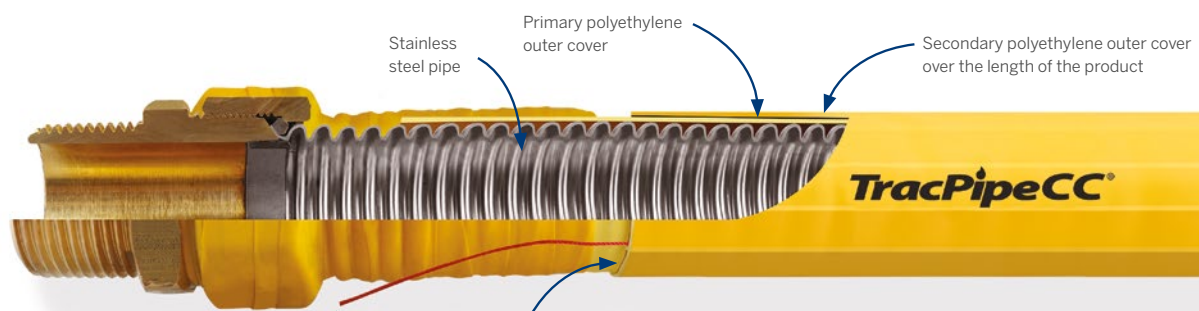

Pull string to assist in stripping back the secondary cover layer without breaching the primary cover

This outer cover includes ridges on the internal surface which form interstices between the primary and secondary outer covers. In the unlikely event that a gas escape could occur, the design allows for a passage to be formed and any escaping gas from the stainless steel pipe and primary cover can move freely along the space formed to a safe and ventilated location at each end of the pipe.

**“After using TracPipeCC®,  
I never want to use  
copper again.”**

Happy customer

**OmegaFlex® Ltd has  
trained in excess of  
25,000 users of TracPipe®  
and TracPipeCC®**

# Product list

Part Number	Description	Size	Length	Pkg Qty	kg/Reel or Ea.
<b>TracPipe® reels - DN 12/15/22/28/32/40/50</b>					
FGP-SS4-12-30	TracPipe® DN12 x 30 metres	DN12	30		7 kg
FGP-SS4-12-75	TracPipe® DN12 x 75 metres	DN12	75		13.6 kg
FGP-SS4-15-30	TracPipe® DN15 x 30 metres	DN15	30		9 kg
FGP-SS4-15-75	TracPipe® DN15 x 75 metres	DN15	75		21.2 kg
FGP-SS4-22-30	TracPipe® DN22 x 30 metres	DN22	30		12.5 kg
FGP-SS4-22-75	TracPipe® DN22 x 75 metres	DN22	75		30 kg
FGP-SS4-28-30	TracPipe® DN28 x 30 metres	DN28	30		16 kg
FGP-SS4-28-55	TracPipe® DN28 x 55 metres	DN28	55		29 kg
FGP-SS4-28-90	TracPipe® DN28 x 90 metres	DN28	90		46.2 kg
FGP-SS4-35-45	TracPipe® DN32 x 45 metres	DN32	45		35.5 kg
FGP-SS4-35-75	TracPipe® DN32 x 75 metres	DN32	75		57 kg
FGP-SS4-40-45	TracPipe® DN40 x 45 metres	DN40	45		38 kg
FGP-SS4-40-75	TracPipe® DN40 x 75 metres	DN40	75		66 kg
FGP-SS4-50-45	TracPipe® DN50 x 45 metres	DN50	45		55.6 kg
<b>TracPipeCC® (Complete Containment) reels - DN 15/22/28/32/40/50</b>					
FGP-SS4-15-30CC	TracPipe®CC DN15 x 30 metres	DN15	30		11.5 kg
FGP-SS4-15-50CC	TracPipe®CC DN15 x 50 metres	DN15	50		19 kg
FGP-SS4-22-30CC	TracPipe®CC DN22 x 30 metres	DN22	30		16.5 kg
FGP-SS4-22-75CC	TracPipe®CC DN22 x 75 metres	DN22	75		39 kg
FGP-SS4-28-30CC	TracPipe®CC DN28 x 30 metres	DN28	30		22 kg
FGP-SS4-28-55CC	TracPipe®CC DN28 x 55 metres	DN28	55		37 kg
FGP-SS4-28-90CC	TracPipe®CC DN28 x 90 metres	DN28	90		59 kg
FGP-SS4-32-45CC	TracPipe®CC DN32 x 45 metres	DN32	45		44 kg
FGP-SS4-32-75CC	TracPipe®CC DN32 x 75 metres	DN32	75		73 kg
FGP-SS4-40-30CC	TracPipe®CC DN40 x 30 metres	DN40	30		34.5 kg
FGP-SS4-40-60CC	TracPipe®CC DN40 x 60 metres	DN40	60		66.5 kg
FGP-SS4-50-40CC	TracPipe®CC DN50 x 40 metres	DN50	40		64.5 kg
<b>Brass AutoFlare® to BSP Male</b>					
FGP-FST-12	AutoFlare® DN12 x 3/8"	DN12		24/box	0.20 kg
FGP-FST-15	AutoFlare® DN15 x 1/2"	DN15		24/box	0.20 kg
FGP-FST-22	AutoFlare® DN22 x 3/4"	DN22		16/box	0.25 kg
FGP-FST-28	AutoFlare® DN28 x 1"	DN28		16/box	0.30 kg
FGP-FST-35	AutoFlare® DN32 x 1.1/4"	DN32		6/box	0.70 kg
FGP-FST-40	AutoFlare® DN40 x 1.1/2"	DN40		4/box	1.00 kg
FGP-FST-50	AutoFlare® DN50 x 2"	DN50		4/box	1.60 kg
<b>Brass AutoFlare® to Tee Fittings</b>					
FGP-TF15-T15	TracPipe® Tee DN15 x DN15 x DN15			14/box	0.50 kg
FGP-TF22-T22	TracPipe® Tee DN22 x DN22 x DN22			12/box	0.75 kg
FGP-TF28-T28	TracPipe® Tee DN28 x DN28 x DN28			10/box	1.00 kg
FGP-TF22-T15	TracPipe® Tee DN22 x DN22 x DN15			12/box	0.75 kg
FGP-TF28-T15	TracPipe® Tee DN28 x DN28 x DN15			10/box	1.00 kg
FGP-TF28-T22	TracPipe® Tee DN28 x DN28 x DN22			10/box	1.00 kg
FGP-RT-1001DN	TracPipe® Tee DN28 x DN22 x DN15			10/box	1.00 kg
FGP-RT-1002DN	TracPipe® Tee DN28 x DN22 x DN22			10/box	1.00 kg
FGP-RT-752DN	TracPipe® Tee DN22 x DN15 x DN15			12/box	0.75 kg
FGP-RT-501DN	TracPipe® Tee DN15 x DN12 x DN12			14/box	0.40 kg
FGP-RT-751DN	TracPipe® Tee DN22 x DN15 x DN12			12/box	0.45 kg
<b>Brass AutoFlare® Coupling</b>					
FGP-CPLG-12	Coupling DN12	DN12		24/box	0.15 kg
FGP-CPLG-15	Coupling DN15	DN15		24/box	0.25 kg
FGP-CPLG-22	Coupling DN22	DN22		16/box	0.35 kg
FGP-CPLG-28	Coupling DN28	DN28		16/box	0.45 kg
FGP-CPLG-35	Coupling DN32	DN32		6/box	0.93 kg
FGP-CPLG-40	Coupling DN40	DN40		4/box	1.50 kg
FGP-CPLG-50	Coupling DN50	DN50		4/box	2.10 kg





Part Number	Description	Size	Length	Pkg Qty	kg/Reel or Ea.
<b>Brass AutoFlare® to Copper Compression Elbow Fitting</b>					
FGP-ELB-DN22-22MM	Elbow 22mm Comp for DN22 Trac	DN22		6/box	0.40 kg
FGP-ELB-DN28-28MM	Elbow 28mm Comp for DN28 Trac	DN28		6/box	0.50 kg
<b>Brass AutoFlare® to Copper Compression Straight Fitting</b>					
FGP-15 x 15mm	15mm Comp for DN15 Trac			24/box	0.20 kg
FGP-22 x 15mm	15mm Comp for DN22 Trac			16/box	0.25 kg
FGP-22 x 22mm	22mm Comp for DN22 Trac			16/box	0.25 kg
FGP-28 x 22mm	22mm Comp for DN28 Trac			16/box	0.30 kg
FGP-28 x 28mm	28mm Comp for DN28 Trac			16/box	0.30 kg
FGP-32 x 22mm	22mm Comp for DN32 Trac			6/box	0.60 kg
FGP-32 x 28mm	28mm Comp for DN32 Trac			6/box	0.60 kg
FGP-32 x 35mm	35mm Comp for DN32 Trac			6/box	0.60 kg
<b>Brass AutoFlare® to BSP Female</b>					
FGP-22 x 500BSP	1/2" BSP female for DN22 Trac			16/box	0.20 kg
FGP-22 x 750BSP	3/4" BSP female for DN22 Trac			16/box	0.30 kg
FGP-28 x 500BSP	1/2" BSP female for DN28 Trac			16/box	0.60 kg
FGP-28 x 750BSP	3/4" BSP female for DN28 Trac			16/box	0.60 kg
FGP-32 x 750BSP	3/4" BSP female for DN32 Trac			6/box	0.60 kg
FGP-FSTF-50	AutoFlare® Female Straight DN50 x 2"	DN50		4/box	1.45 kg
<b>Self Amalgamating Yellow Silicone Tape</b>					
FGP-915-10H-12	Silicone tape yellow 25mm wide	25mm	11		0.15 kg
FGP-915-20H12PO	Silicone tape yellow 50mm wide	50mm	11		0.30 kg
<b>TracPipe® Installer Pack - cut length with tape and 2 FST male BSP fittings</b>					
FGP-15-05KIT	5 mtr length of DN15 w/2 FST's & tape	DN15	5		1.0 kg
FGP-15-10KIT	10 mtr length of DN15 w/2 FST's & tape	DN15	10		2.0 kg
FGP-15-15KIT	15 mtr length of DN15 w/2 FST's & tape	DN15	15		3.0 kg
FGP-22-05KIT	5 mtr length of DN22 w/2 FST's & tape	DN22	5		3.0 kg
FGP-22-10KIT	10 mtr length of DN22 w/2 FST's & tape	DN22	10		5.0 kg
FGP-22-15KIT	15 mtr length of DN22 w/2 FST's & tape	DN22	15		6.0 kg
FGP-28-05KIT	5 mtr length of DN28 w/2 FST's & tape	DN28	5		3.0 kg
FGP-28-10KIT	10 mtr length of DN28 w/2 FST's & tape	DN28	10		6.0 kg
FGP-28-15KIT	15 mtr length of DN28 w/2 FST's & tape	DN28	15		7.0 kg
FGP-32-05KIT	5 mtr length of DN32 w/2 FST's & tape	DN32	5		5.0 kg
FGP-32-10KIT	10 mtr length of DN32 w/2 FST's & tape	DN32	10		8.0 kg
FGP-32-15KIT	15 mtr length of DN32 w/2 FST's & tape	DN32	15		11.0 kg
<b>TracPipe® Installer Pack - cut length with tape only (fittings ordered separately)</b>					
FGP-15-05	5 mtr length of DN15 & tape	DN15	5		1.0 kg
FGP-15-10	10 mtr length of DN15 & tape	DN15	10		2.0 kg
FGP-15-15	15 mtr length of DN15 & tape	DN15	15		3.0 kg
FGP-22-05	5 mtr length of DN22 & tape	DN22	5		2.0 kg
FGP-22-10	10 mtr length of DN22 & tape	DN22	10		4.0 kg
FGP-22-15	15 mtr length of DN22 & tape	DN22	15		5.0 kg
FGP-28-05	5 mtr length of DN28 & tape	DN28	5		2.0 kg
FGP-28-10	10 mtr length of DN28 & tape	DN28	10		5.0 kg
FGP-28-15	15 mtr length of DN28 & tape	DN28	15		6.0 kg
FGP-32-05	5 mtr length of DN32 & tape	DN32	5		4.0 kg
FGP-32-10	10 mtr length of DN32 & tape	DN32	10		7.0 kg
FGP-32-15	15 mtr length of DN32 & tape	DN32	15		10.0 kg
<b>Pipe Cutter</b>					
Note - Special tools not required. To cut DN32-DN50 use a cutting wheel FGP-E-5272 or equal.					
FGP-TC-151	Rigid Cutter 151	DN12-28		1	0.41 kg
FGP-TC-152	Rigid Cutter 152	DN12-50		1	0.86 kg
FGP-E-5272	Cutter Wheel	DN32-50		1	0.04 kg



# Safer, Faster, Easier



**OmegaFlex**<sup>®</sup>

[www.tracpipe.co.uk](http://www.tracpipe.co.uk)

OmegaFlex Limited, Kildare House - Wildmere Road, Banbury, Oxfordshire OX16 3JU

Telephone: +44 (0)1295 676 670

Fax: +44 (0)1295 267 302

Email: Sales - [eurosales@omegaflex.com](mailto:eurosales@omegaflex.com)

Technical - [tech-help@omegaflex.com](mailto:tech-help@omegaflex.com)

**TracPipe**<sup>®</sup>  
Flexible Gas Piping by Omega Flex<sup>®</sup>

**TracPipeCC**<sup>®</sup>  
Flexible Gas Piping by Omega Flex<sup>®</sup> Complete Containment