



Installation Instructions

Thank you for purchasing a UTV enclosure manufactured in the USA with pride by 3SI UTV. Your enclosure is made of heavy duty fabric that is water repellent and resistant to mildew, ultra-violet rays and abrasion. With proper installation and care you can expect many years of service from your 3SI UTV enclosure.

SOME IMPORTANT NOTES BEFORE GETTING STARTED....

- The enclosure attaches to your UTV's cab frame with Velcro. The technical term for Velcro is hook and loop. Loop is the soft side and hook, the rough side. Loop has been sewn into the enclosure at various points. Adhesive hook has been supplied to attach to your cab frame, corresponding to the sewn-in loop. If you struggle with placement of the adhesive hook, with the enclosure held to the cab frame, note the locations of the sewn-in loop. The adhesive hook is attached to the cab frame at those locations.
- The adhesive hook should be applied at a temperature of 60 degrees or above. **For maximum adhesion, when the adhesive hook is in place, allow the adhesive to cure for 24 hours before attaching the loop to the hook.**
- Clean the surfaces the adhesive hook will be attached to before beginning installation. A light cleaning with mild soap and water is best. A little Windex works great. Do NOT wax or clean with a compound that leaves the frame slick. The adhesive hook will not stick to a slick surface. Again, a light cleaning is best.
- Your enclosure is not a one size fits all product. The enclosure was designed and manufactured specifically for your model UTV. As a result, the enclosure should fit square and snug to the cab frame.
- Periodic cleaning of your enclosure with mild soap and water is recommended to minimize accumulations of dirt.
- Clean the vinyl windows with mild soap, water, and a soft cloth to avoid scratches. DO NOT USE ANY DETERGENTS, WINDOW CLEANERS, SOLVENTS OR CHEMICALS TO CLEAN VINYL WINDOWS.
- Clean your enclosure and allow it to dry before removing for storage. **Never fold your enclosure to store.** Roll the enclosure to avoid creasing the vinyl windows. Creases in the vinyl windows cannot be removed. **CREASING THE VINYL WINDOWS VOIDS ALL WARRANTIES AND GUARANTEES.**
- The only enclosures manufactured by 3SI UTV that can be hauled when installed are Lexan windshields, full cab enclosures, and door/rear window combos with top and windshield installed. However, the enclosures should be tied down before hauling. Speed should not exceed 55 mph while hauling to prevent ripping and shredding of the material and zippers. REMOVE ALL OTHER ENCLOSURES BEFORE HAULING.

PLEASE READ AND FOLLOW THE DETAILED INSTRUCTIONS THAT ARE ATTACHED.



Kawasaki Mule 3010 Full Cab Enclosure Installation

You have just purchased the best Enclosure for your Utility Terrain Vehicle available on the market today. Your Enclosure is made of Heavy Duty Fabric that is Water Repellent and resistant to Mildew, Ultra-Violet Sun Rays and Abrasion. With proper installation and care you can expect many years of long lasting fit, color and service life from your **3SI UTV Full Cab Enclosure**.

Step 1: Remove your 3SI UTV Full Cab Enclosure and Velcro kit from the shipping box.

Contents: 1 – Kawasaki 3010 Full Cab Enclosure

1 – 49” Rear cab guard Velcro Strip

8 - 8” Velcro Strips (6 Front Cab Roll Bar Posts, 2 Rear Cab Roll Bar Posts)

2 – 6” Velcro Strips (2 Rear Cab Roll Bar Posts lower)

2 - 12” Velcro Strips (2 Dash Cowl side lower)

2 – 5” Velcro Strips (2 front Roll Bar Bolt section)

2 –33” Velcro Strips (Bottom of Door Panels-Horizontal)

Note: before applying adhesive Velcro Strips to your vehicle, surfaces should be free of dust, dirt and oil. Clean surfaces with water or Windex only. Do not use solvents to prepare your vehicle surfaces for Velcro application.

Step 2: Remove the clear plastic backing from the 8" Velcro strips and adhere to the Front and Rear Cab Roll Bar Posts as shown in figures 2.1, 2.2 and 2.3. Also place 8" velcro strips 23" below the top rear cab roll bar cross-member bolted section as shown in figure 2.4. Velcro strips should face away from the center of the cab. Repeat both sides.



Figure 2.1 - 8" Velcro strips placed vertically 4 ¼" above the front roll bar post bolts



Figure 2.2 - 8" Velcro strips placed vertically 15" above the front roll bar post bolts



Figure 2.3 - 8" Velcro Strips placed vertically 27" above the front roll bar post bolts

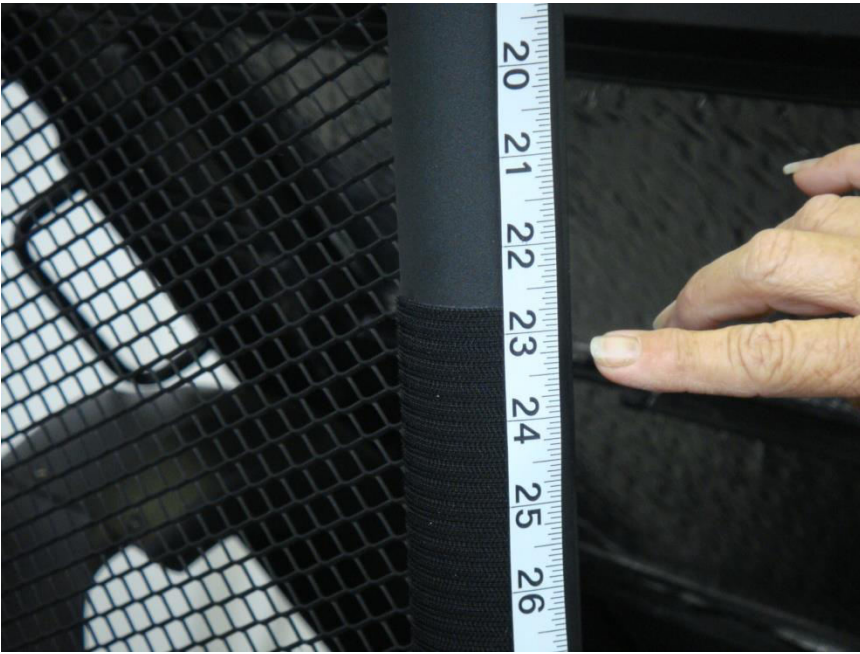


Figure 2.4 - 8" Velcro Strips placed 23" below the top rear cab roll bar cross-member bolted section

Step 3: Remove the clear plastic backing from the **6" Velcro strips** and **adhere to the base of the Rear Roll Bar Posts as shown in figure 3.1**. Note: Velcro Strips should go completely around the roll bar horizontally and the seam should face the cab interior. Repeat both sides. Also, remove the back and install the 2-33" Velcro strips horizontally along each of the rocker panels corresponding to the bottom of the door panels.



Figure 3.1 - 6" Velcro Strips placed horizontally at the base of the rear roll bar posts

Step 4: Remove the clear plastic backing from the **12" and 5" Velcro strips** and **adhere to the side of the Dash Cowl as shown in figure 4.1** and to the **Roll Bar Bolt** section as shown in figure 4.2. Repeat both sides.



Figure 4.1 - 12" Velcro Strips placed horizontally on the side of the Dash Cowl



Figure 4.2 - 5" Velcro Strips placed horizontally around the front Roll Bar Bolt section

Step 5: Remove the clear plastic backing from the 49" Velcro strip and adhere to the rear cab guard as shown in figure 5.1. Note you will need to raise the vehicle bed to perform this installation step



Figure 5.1 - 49" Velcro Strip Placed 9" below the top of the cab rear guard on the top raised rib

Step 6: Place the Full Cab Enclosure on top of the Roll Bar Cab Frame as shown in figure 6.1 and adjust so that the enclosure seams are located near the center of the Roll Bars. The vehicle bed will need to be raised for this installation step.



Figure 6.1 - place enclosure on vehicle cab roll bar structure

Step 7: Begin attaching Enclosure by first squaring the back of the Enclosure to the Rear of the Cab frame and attaching the Rear Cab Guard Enclosure Velcro tab to the installed 49" Velcro strip as shown in figure 7.1



Figure 7.1 - square rear of enclosure to cab and attach rear enclosure Velcro tab to installed Velcro strip

Step 8: Pulling upward & outward on the 8" Rear Roll Bar Post Enclosure Velcro Tabs, attach Rear Roll Bar Post Enclosure tabs to installed 8" Velcro Strips as shown in figure 8.1. Also attach Rear Cab Roll Bar Post enclosure Velcro tabs to installed Velcro strips as shown in figure 8.2. This should straighten out and tighten the back window section of the Enclosure. Repeat both sides.

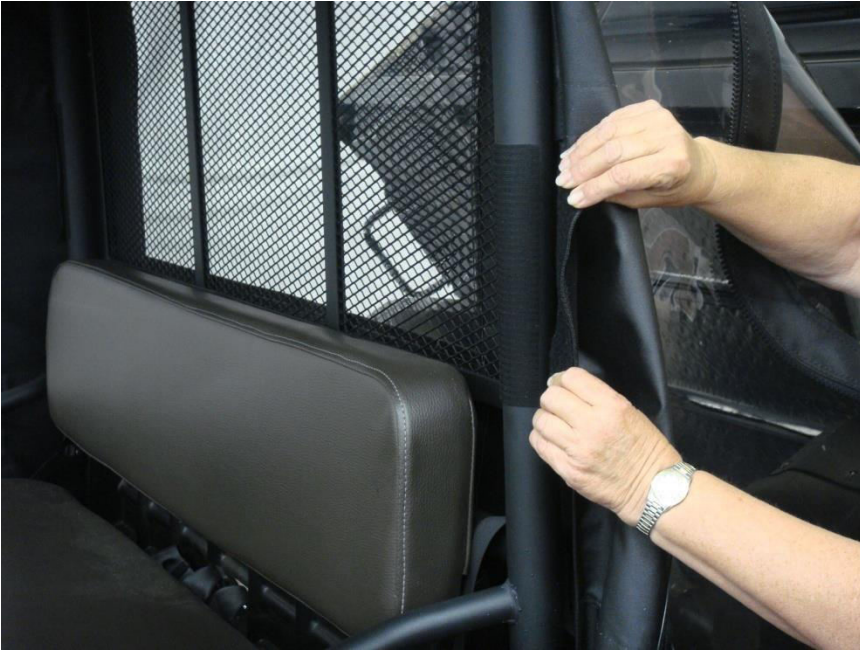


Figure 8.1 - attach Rear Roll Bar Post Velcro tabs – pull upward and outward to tighten back of enclosure



Figure 8.2 - attach Rear Roll Bar Velcro tabs at base of rear Roll Bar Posts

Step 9: Fasten pre-attached Enclosure Front Hood Straps to the center bar of the Vehicle front bumper as shown in figure 9.1. Bringing the end of the straps up to the latch buckle, run the end through the back of the top buckle opening first and then through the front of the lower buckle opening as shown in figure 9.2. DO NOT FULLY TIGHTEN FRONT HOOD STRAPS AT THIS TIME.



Figure 9.1 - run front hood straps through the center bar of the front bumper



Figure 9.2 - thread front hood straps into buckles

Step 10: Starting with the top Front Roll Bar Post Enclosure tabs pull outward and downward attaching tabs to 8" inch Velcro Strips on the Front Roll Bar as shown in figure 10.1. Repeat this process with the lower Front Roll Bar Enclosure Tabs as shown in figure 10.2 and 10.3 making sure that the Windshield is centered between the Roll Bar posts. Also attach front Roll Bar Bolt section Velcro Tab as shown in figure 10.4. Repeat both sides.



Figure 10.1 - attach top front roll bar Velcro tab

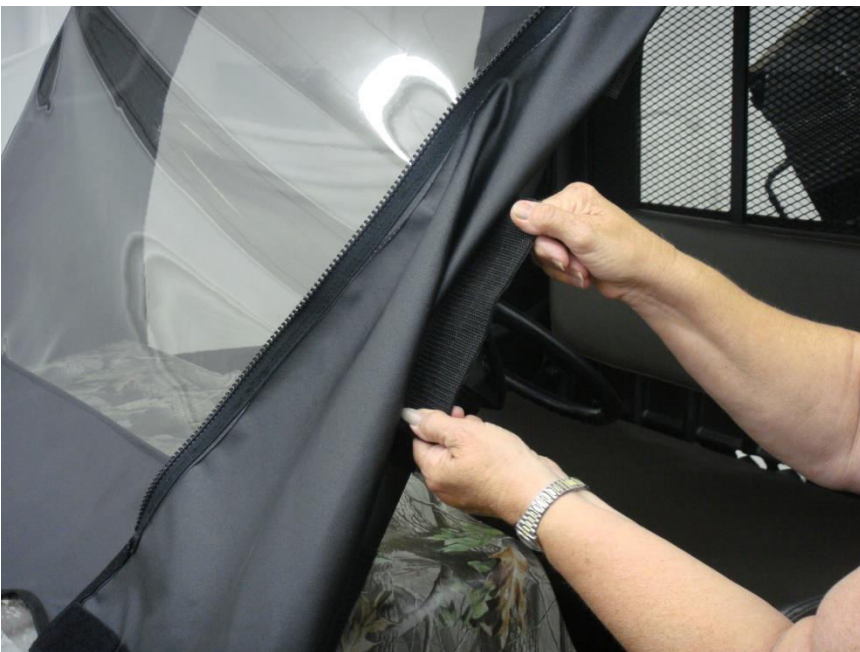


Figure 10.2 - attach center front roll bar Velcro tab



Figure 10.3 - attach bottom front roll bar Velcro tab



Figure 10.4 - attach front roll bar bolt section velcro

Step 11: Tighten Front Hood Straps by pulling downward from the buckle on both strap ends at the same time.

Step 12: Zip Doors closed and attach Dash Cowl side lower Velcro Tabs to respective Velcro Strips as shown in figure 12.1 and 12.2. Repeat both sides.



Figure 12.1 - attach Dash Cowl side Velcro Tabs



Figure 12.2 - attach enclosure magnets to bottom of vehicle door frame

Step 13: Repeat Steps 8, 10, 11 and 12 until the Enclosure fits snugly to the Vehicle Roll Bar structure and front and rear windows are tight as shown in figure 13.1



Figure 13.1 - follow steps 8, 10, 11 and 12 to fully tighten cab enclosure

See enclosed Product Care sheet for instructions on how to properly care for your 3SI UTV Enclosure.



Care Instructions

Heavy Duty Marine and Mil-Spec Military Fabric Cleaning

All 3SI UTV Enclosure Heavy Duty Marine and Military Camo fabrics are guaranteed against excessive loss of color or strength under normal exposure and use conditions. Periodic cleaning with a solution of 4 ounces of bleach and 2 ounces of soap (NOT DETERGENTS) in one gallon of water is recommended to minimize accumulations of dirt, bird droppings and other contaminants which can support surface mildew and stain fabric.

Soft Vinyl Window Cleaning

3SI UTV Enclosure Vinyl Windows will remain clear and provide great visibility under normal exposure conditions if properly cleaned. Periodic cleaning with a solution of 1 ounce of soap in one gallon of water is all that is needed to maintain good window cleanliness and visibility. Caution: DO NOT USE ANY DETERGENTS, WINDOW CLEANERS, SOLVENTS or CHEMICALS OF ANY KIND TO CLEAN VINYL WINDOWS AS THESE WILL CLOUD THE WINDOWS. ALSO, NEVER RUB WINDOWS WITH A DRY CLOTH OR RAG.

Storage Recommendations

Before removing the 3SI UTV Enclosure from your vehicle for storage, clean the Fabric and Vinyl Windows thoroughly as indicated above. Any dirt remaining on the Enclosure may scratch Vinyl Windows while in storage. Once the Enclosure has been cleaned it should be placed on a large flat surface. Lay the Enclosure out so that Vinyl Windows are in a flat position. Fold the doors over the rear panel first then fold the top and windshield on top of the doors keeping the Vinyl Windows flat. Caution: **FOLDING VINYL WINDOWS WILL CAUSE PERMANENT CREASE DAMAGE AND WILL VOID ALL WARRANTIES.** Once the Enclosure is folded keeping all Vinyl Windows flat, begin rolling the Enclosure into an 8" roll. Place the 8" roll into a box and store at normal room temperature. To ensure long life of your enclosure it is best not to store in extreme temperatures.

Hauling

The ONLY products manufactured by 3SI UTV that can be hauled while installed are the hard windshields, full cab enclosures, and door/rear window combos with top and windshield installed. However, the full cab enclosures and door/rear window combos should be tied down before hauling. Speed should not exceed 55 mph while hauling to prevent ripping and shredding of the material and zippers. NEVER HAUL INSTALLED SOFT TOPS, WINDSHIELD TOP COMBOS, AND SUMMER CABS. **REMOVE BEFORE HAULING.**