



Installation Instructions

Thank you for purchasing a UTV enclosure manufactured in the USA with pride by 3SI UTV. Your enclosure is made of heavy duty fabric that is water repellent and resistant to mildew, ultra-violet rays and abrasion. With proper installation and care you can expect many years of service from your 3SI UTV enclosure.

SOME IMPORTANT NOTES BEFORE GETTING STARTED....

- The enclosure attaches to your UTV's cab frame with Velcro. The technical term for Velcro is hook and loop. Loop is the soft side and hook, the rough side. Loop has been sewn into the enclosure at various points. Adhesive hook has been supplied to attach to your cab frame, corresponding to the sewn-in loop. If you struggle with placement of the adhesive hook, with the enclosure held to the cab frame, note the locations of the sewn-in loop. The adhesive hook is attached to the cab frame at those locations.
- The adhesive hook should be applied at a temperature of 60 degrees or above. **For maximum adhesion, when the adhesive hook is in place, allow the adhesive to cure for 24 hours before attaching the loop to the hook.**
- Clean the surfaces the adhesive hook will be attached to before beginning installation. A light cleaning with mild soap and water is best. A little Windex works great. Do NOT wax or clean with a compound that leaves the frame slick. The adhesive hook will not stick to a slick surface. Again, a light cleaning is best.
- Your enclosure is not a "one size fits all" product. The enclosure was designed and manufactured specifically for your model UTV. As a result, the enclosure should fit square and snug to the cab frame.
- Periodic cleaning of your enclosure with mild soap and water is recommended to minimize accumulations of dirt.
- Clean the vinyl windows with mild soap, water, and a soft cloth to avoid scratches. DO NOT USE ANY DETERGENTS, WINDOW CLEANERS, SOLVENTS OR CHEMICALS TO CLEAN VINYL WINDOWS.
- Clean your enclosure and allow it to dry before removing for storage. **Never fold your enclosure to store.** Roll the enclosure to avoid creasing the vinyl windows. Creases in the vinyl windows cannot be removed. **CREASING THE VINYL WINDOWS VOIDS ALL WARRANTIES AND GUARANTEES.**
- The only enclosures manufactured by 3SI UTV that can be hauled when installed are Lexan windshields, full cab enclosures, and door/rear window combos with top and windshield installed. However, the enclosures should be tied down before hauling. Speed should not exceed 55 mph while hauling to prevent ripping and shredding of the material and zippers. REMOVE ALL OTHER ENCLOSURES BEFORE HAULING.

PLEASE READ AND FOLLOW THE DETAILED INSTRUCTIONS THAT ARE ATTACHED.



Kawasaki Mule 4010 Full Cab Enclosure for Hard Windshield Installation

You have just purchased the best Enclosure for your Utility Terrain Vehicle available on the market today. Your Enclosure is made of Heavy Duty Fabric that is Water Repellent and resistant to Mildew, Ultra-Violet Sun Rays and Abrasion. With proper installation and care you can expect many years of long lasting fit, color and service life from your **3SI UTV Full Cab Enclosure**.

Step 1: Remove your 3SI UTV Full Cab Enclosure and Velcro kit from the shipping box.

Contents: 1 – Kawasaki 4010 Full Cab Enclosure

1 – 49” Cab Frame Rear lower

2 - 8” Velcro Strips - Rear Cab Roll Bar Posts

2 – 6” Velcro Strips - 2 Rear Cab Roll Bar Posts lower, horizontal

2 - 12” Velcro Strips - Dash Cowl side lower

2 – 14 ½” Velcro Strips – Door Frame front lower

2 – 31” Velcro Strips – Door Rocker Panel bottom

2 – 36” Velcro Strips – Windshield Roll Bar Post uprights

1 – 54” Velcro Strip – Top Front Windshield placed horizontally

Note: before applying adhesive Velcro Strips to your vehicle, surfaces should be free of dust, dirt and oil. Clean surfaces with water or Windex only. Do not use solvents to prepare your vehicle surfaces for Velcro application.

Step 2: Remove the clear plastic backing from the 36” Velcro strips and adhere along the front of the Windshield Roll Bar Post uprights; place toward the front inside of the windshield Roll bars

Step 3: Remove the clear plastic backing from the **8" Velcro strips** and adhere to the **Rear Cab Roll Bar Uprights** approx **23"** below the top rear cab roll bar cross-member bolted section as shown in figure 3.1. Velcro strips should face away from the center of the cab.

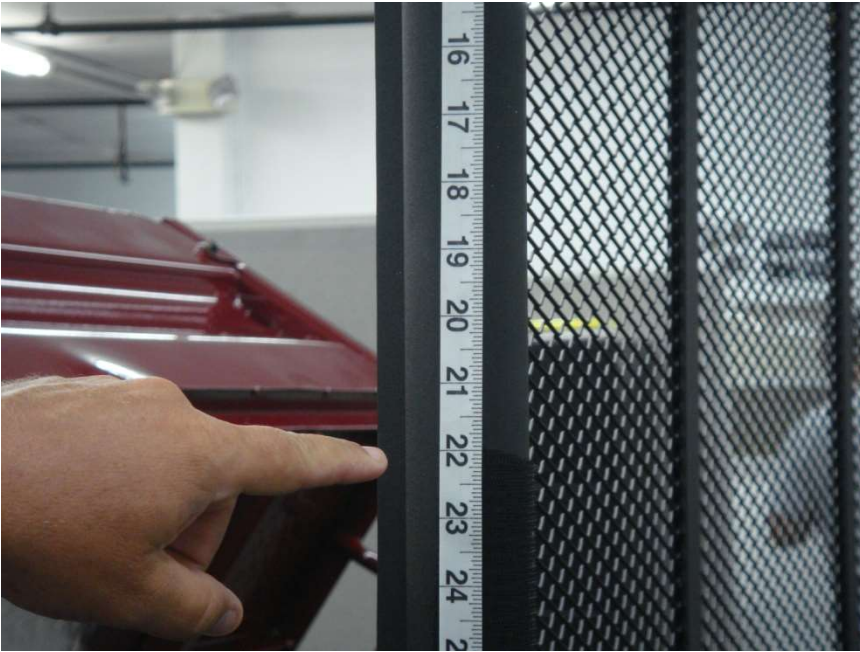


Figure 3.1 - 8" Velcro Strips placed vertically approx 23" below the top rear cab roll bar cross-member bolted section

Step 4: Remove the clear plastic backing from the **6" Velcro strips** and adhere horizontally around the base of the **Rear Roll Bar Posts** as shown in figure 4.1. Note: Velcro Strips should go completely around the roll bar horizontally and the seam should face the cab interior.



Figure 4.1 - 6" Velcro Strips placed horizontally at the base of the rear roll bar posts

Step 5: Remove the clear plastic backing from the **12" Velcro strips** and adhere to the side of the **Dash Cowl** as shown in figure 5.1 . Note: you will need to split the Dash Cowl Side Lower into **8"** and **4"** sections to form to the curve of the

front fender well. Remove the clear plastic backing from the 14 ½” Velcro Strips and place along the Front Lower Door Frame area as shown in figure 5.2. Remove the clear plastic backing from the 31” Velcro Strips and place along the Door Rocker Panel as shown in figure 5.3.



Figure 5.1 - 12” Velcro Strips placed horizontally on the side of the Dash Cowl – split to 8” and 4” sections



Figure 5.2 – 14 ½” Velcro strips placed vertically at the Front Lower Door Frame Area



Figure 5.3 – 31” Velcro Strips placed along the Door Rocker Panel

Step 6: Remove the clear plastic backing from the 49” Velcro strip and adhere to the rear cab guard as shown in figure 6.1. Note you will need to raise the vehicle bed to perform this installation step



Figure 6.1 - 49” Velcro Strip Placed on the cab rear guard on the top raised rib

Step 7: Place the Full Cab Enclosure on top of the Vehicle Roll Bar Cab Frame and adjust so that the enclosure seams are located near the center of the Roll Bars. The vehicle bed will need to be raised for this installation step.

Step 8: Begin attaching Enclosure by first squaring the back of the Enclosure to the Rear of the Cab frame and attaching the Rear Cab Guard Enclosure Velcro tab to the installed 49" Velcro strip as shown in figure 8.1



Figure 8.1 - square rear of enclosure to cab and attach rear enclosure Velcro tab to installed Velcro strip

Step 9: Pulling upward & outward on the 8" Rear Roll Bar Post Enclosure Velcro Tabs, attach Rear Roll Bar Post Enclosure tabs to installed 8" Velcro Strips as shown in figure 9.1. Also attach Rear Cab Roll Bar Post enclosure Velcro tabs to installed Velcro strips as shown in figure 9.2. This should straighten out and tighten the back window section of the Enclosure.

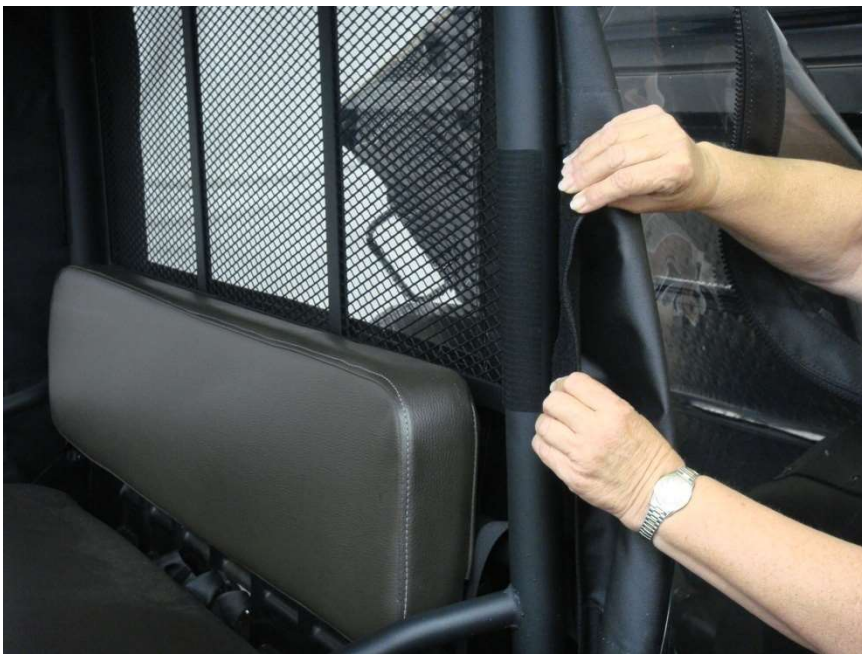


Figure 9.1 - attach Rear Roll Bar Post Velcro tabs – pull upward and outward to tighten back of enclosure



Figure 9.2 - attach Rear Roll Bar Velcro tabs at base of rear Roll Bar Posts

Step 10: Attach the Windshield Roll Bar Post Enclosure tabs to the installed 36" Velcro Strips as shown in figure 10.1. Your hard windshield will be placed over these tabs. You will need to cut out 2" sections of the tab using household scissors being careful not to cut the binding and searing frayed fabric ends as shown in figure 10.2, 10.3 and 10.4. This will allow you to place Lexan Windshield Clamps at locations along the front windshield Roll Bar Uprights to mount your hard windshield.



Figure 10.1 – attach Windshield Roll Bar Post Velcro Tabs to installed 36" Velcro Strips



Figure 10.2 - Mark windshield tabs where hard windshield clamps are located along the windshield Roll Bar



Figure 10.3 – Cut the Tab being very careful not to cut the binding at the edge



Figure 10.4 – Seal Frayed Tab thread at the cut area using a lighter

Step 11: Zip Doors closed and attach Dash Cowl side lower and Door Velcro Tabs to respective Velcro Strips as shown in figure 10.1 and 10.2.

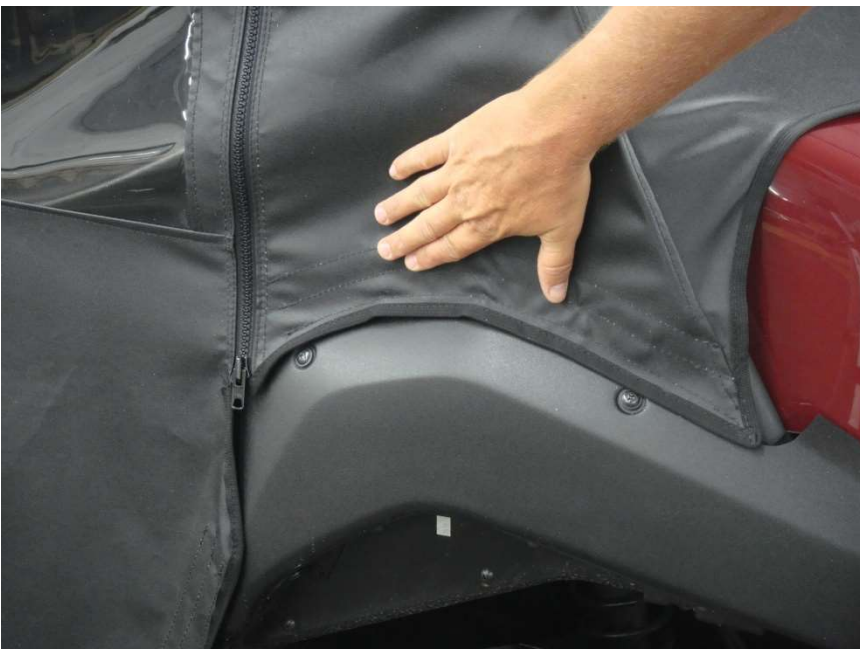


Figure 11.1 - attach Dash Cowl side Velcro Tabs



Figure 11.2 - attach Door Velcro Tabs

Step 12: Repeat Steps 7, 8, 9 and 10 until the Enclosure fits snug to the Vehicle Roll Bar structure and front and rear windows are tight.

Step 13: At this time refer to your Lexan Windshield Installation Instructions to Install your 3SI UTV Polycarbonate Windshield Kit or install the 54" Velcro Strip across the Top Front of your existing Hard Windshield to match the front top enclosure windshield Velcro Tab flap.

See enclosed Product Care sheet for instructions on how to properly care for your 3SI UTV Enclosure.



Care Instructions

Heavy Duty Marine and Mil-Spec Military Fabric Cleaning

All 3SI UTV Enclosure Heavy Duty Marine and Military Camo fabrics are guaranteed against excessive loss of color or strength under normal exposure and use conditions. Periodic cleaning with a solution of 4 ounces of bleach and 2 ounces of soap (NOT DETERGENTS) in one gallon of water is recommended to minimize accumulations of dirt, bird droppings and other contaminants which can support surface mildew and stain fabric.

Soft Vinyl Window Cleaning

3SI UTV Enclosure Vinyl Windows will remain clear and provide great visibility under normal exposure conditions if properly cleaned. Periodic cleaning with a solution of 1 ounce of soap in one gallon of water is all that is needed to maintain good window cleanliness and visibility. Caution: DO NOT USE ANY DETERGENTS, WINDOW CLEANERS, SOLVENTS or CHEMICALS OF ANY KIND TO CLEAN VINYL WINDOWS AS THESE WILL CLOUD THE WINDOWS. ALSO, NEVER RUB WINDOWS WITH A DRY CLOTH OR RAG.

Storage Recommendations

Before removing the 3SI UTV Enclosure from your vehicle for storage, clean the Fabric and Vinyl Windows thoroughly as indicated above. Any dirt remaining on the Enclosure may scratch Vinyl Windows while in storage. Once the Enclosure has been cleaned it should be placed on a large flat surface. Lay the Enclosure out so that Vinyl Windows are in a flat position. Fold the doors over the rear panel first then fold the top and windshield on top of the doors keeping the Vinyl Windows flat. Caution: **FOLDING VINYL WINDOWS WILL CAUSE PERMANENT CREASE DAMAGE AND WILL VOID ALL WARRANTIES.** Once the Enclosure is folded keeping all Vinyl Windows flat, begin rolling the Enclosure into an 8" roll. Place the 8" roll into a box and store at normal room temperature. To ensure long life of your enclosure it is best not to store in extreme temperatures.

Hauling

The ONLY products manufactured by 3SI UTV that can be hauled while installed are the hard windshields, full cab enclosures, and door/rear window combos with top and windshield installed. However, the full cab enclosures and door/rear window combos should be tied down before hauling. Speed should not exceed 55 mph while hauling to prevent ripping and shredding of the material and zippers. NEVER HAUL INSTALLED SOFT TOPS, WINDSHIELD TOP COMBOS, AND SUMMER CABS. REMOVE BEFORE HAULING.

