



Installation Instructions

Thank you for purchasing a UTV enclosure manufactured in the USA with pride by 3SI UTV. Your enclosure is made of heavy duty fabric that is water repellent and resistant to mildew, ultra-violet rays and abrasion. With proper installation and care you can expect many years of service from your 3SI UTV enclosure.

SOME IMPORTANT NOTES BEFORE GETTING STARTED....

- The enclosure attaches to your UTV's cab frame with Velcro. The technical term for Velcro is hook and loop. Loop is the soft side and hook, the rough side. Loop has been sewn into the enclosure at various points. Adhesive hook has been supplied to attach to your cab frame, corresponding to the sewn-in loop. If you struggle with placement of the adhesive hook, with the enclosure held to the cab frame, note the locations of the sewn-in loop. The adhesive hook is attached to the cab frame at those locations.
- The adhesive hook should be applied at a temperature of 60 degrees or above. **For maximum adhesion, when the adhesive hook is in place, allow the adhesive to cure for 24 hours before attaching the loop to the hook.**
- Clean the surfaces the adhesive hook will be attached to before beginning installation. A light cleaning with mild soap and water is best. A little Windex works great. Do NOT wax or clean with a compound that leaves the frame slick. The adhesive hook will not stick to a slick surface. Again, a light cleaning is best.
- Your enclosure is not a "one size fits all" product. The enclosure was designed and manufactured specifically for your model UTV. As a result, the enclosure should fit square and snug to the cab frame.
- Periodic cleaning of your enclosure with mild soap and water is recommended to minimize accumulations of dirt.
- Clean the vinyl windows with mild soap, water, and a soft cloth to avoid scratches. DO NOT USE ANY DETERGENTS, WINDOW CLEANERS, SOLVENTS OR CHEMICALS TO CLEAN VINYL WINDOWS.
- Clean your enclosure and allow it to dry before removing for storage. **Never fold your enclosure to store.** Roll the enclosure to avoid creasing the vinyl windows. Creases in the vinyl windows cannot be removed. **CREASING THE VINYL WINDOWS VOIDS ALL WARRANTIES AND GUARANTEES.**
- The only enclosures manufactured by 3SI UTV that can be hauled when installed are Lexan windshields, full cab enclosures, and door/rear window combos with top and windshield installed. However, the enclosures should be tied down before hauling. Speed should not exceed 55 mph while hauling to prevent ripping and shredding of the material and zippers. REMOVE ALL OTHER ENCLOSURES BEFORE HAULING.

PLEASE READ AND FOLLOW THE DETAILED INSTRUCTIONS THAT ARE ATTACHED.



Kawasaki Pro FXT Full Cab for Hard Windshield

Installation Instructions

You have just purchased the best Enclosure for your Utility Terrain Vehicle available on the market today. Your Enclosure is made of Heavy Duty Fabric that is Water Repellent and resistant to Mildew, Ultra-Violet Sun Rays and Abrasion. With proper installation and care you can expect many years of long lasting fit, color and service life from your **3SI UTV Cab Enclosure**.

TOOLS NEEDED:

Scissors

Lighter

Chalk or light marker

The enclosures for the Kawasaki Pro FX Trans were designed to be modular. Each enclosure panel can be installed independent of the other panels. As a result, you choose your level of coverage. For cold weather, you have the option of full coverage, windshield, top, doors, and back panel. When warm, store the doors and back panel and leave only the windshield and top on.

Install the modular cab enclosure in the following order:

- Back Panel
- Door Panels
- Windshield/Top or Top

Step 1: Remove your 3SI UTV Cab Enclosure and Velcro kit from the shipping box.

Step 2: Mark the location of the windshield clamps with a piece of chalk. Remove your top and windshield.

Step 3: Before installing each panel, with an assistant, hold the panel to the cab frame. Note the location of Velcro loop strips that are sewn into the enclosure. Adhesive Velcro hook strips will be installed to correspond to the Velcro loop strips sewn into the enclosure. Please refer to the attached adhesive hook kit table and pictures for approximate installation locations.


Step 4: Remove the backing from the adhesive hook strips and install as indicated in the attached adhesive hook table and pictures. **PLEASE NOTE....the adhesive strips that run the length of the front roll bars must be cut to accommodate the windshield clamps. Follow the instructions accordingly.**

Step 5: After all adhesive Velcro strips are attached, starting with the back panel, begin attaching the door/rear window combo to the cab frame. As you work, square each panel to the cab frame.

Step 6: After installing the door panels, pull each door panel forward to the edge of the front roll bars. When installed properly, the binding between the canvas fabric and the webbing strips should rest along the outer edge of the windshield.



Step 7: The webbing/Velcro strip that runs the length of the front roll bars may need to be cut to accommodate the windshield clamps and the grab handle. With chalk, mark the webbing strip where cuts will be made. **DO NOT CUT INTO THE BINDING.**

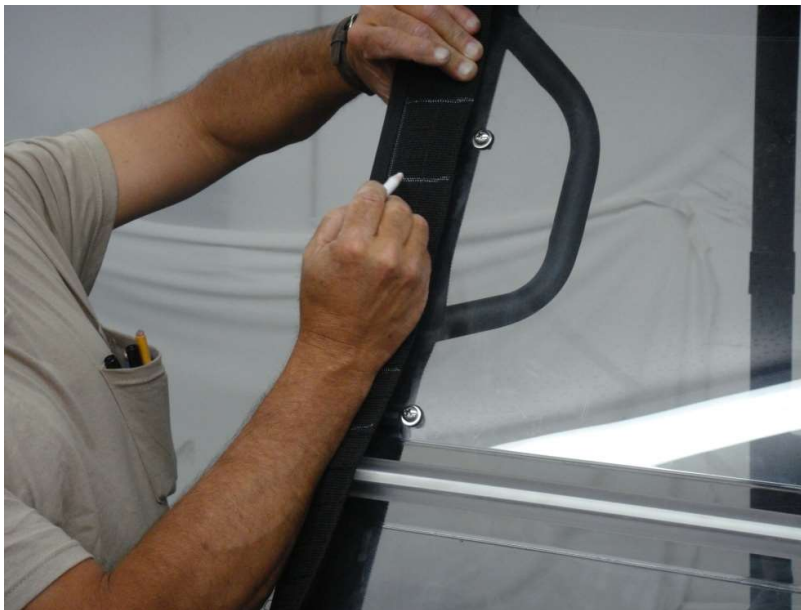

Step 8: Cut the webbing strip with household scissors. **AGAIN, DO NOT CUT INTO THE BINDING.** Seal the frayed edges with a lighter. Have a wet cloth handy to dab the edges if needed.



Cut the Tab being very careful not to cut the binding at the edge.



Seal Frayed Tab thread at the cut area using a lighter

Step 9: Pull the enclosure forward and wrap the enclosure around the front roll bars. Attach the webbing strip to the attached adhesive hook strips.

Step 10: Repeat any steps necessary to achieve a snug fit on the cab frame.

Step 11: Re-install your windshield, top, and rear panel.


See enclosed Product Care sheet for instructions on how to properly care for your 3SI UTV Enclosure.

Adhesive Hook Kit Contents/Placement		
BACK PANEL-The main section of the back panel wraps around the rear bed guard.		
Reference	Qty-Size	Placement
A	2-10"	Attach horizontally to the underside of the top bars on the rear bed guard. Wrap the corresponding webbing/loop tabs on either side of the top of the rear panel to the adhesive hook strips.
B	1-12"	Attach horizontally to the underside of the top bars on the rear bed guard. Wrap the corresponding webbing/loop tabs on the middle of the top of the rear panel to the adhesive hook strips.
C	2-13"	Attach vertically to the inside of the rear bed guard on each side corresponding to the sewn-in loop above the support bracket. Attach sewn-in loop on either side of the rear panel to the adhesive strips.
D	2-7"	Attach vertically to the inside of the rear bed guard on each side corresponding to the sewn-in loop below the support bracket. Attach sewn-in loop on either side of the rear panel to the adhesive strips.
E	1-60"	Attach horizontally to the body corresponding to the sewn-in loop on the bottom of the rear panel. Attach sewn-in loop strip to the adhesive hook strip.
After the main back panel is installed, install the auxiliary side panels. Attach the sewn-in loop on the auxiliary side panels to the sewn-in hook on the main back panel. Note, the auxiliary side panels have a correct right and left side. Continue attaching the adhesive hook strips for the auxiliary panels as indicated below.		


F	2-3"	Attach vertically to the outside edge of the rear roll bar uprights corresponding to the sewn-in webbing/loop tab near the top of the auxiliary side panel. Attach the sewn-in loop in the tab to the adhesive strip.
G	2-8"	Attach vertically to the outside edge of the rear roll bar uprights corresponding to the sewn-in webbing/loop tab near the top of the auxiliary side panel. Attach the sewn-in loop in the tab to the adhesive strip.
H	2-5"	Attach vertically to the outside edge of the rear roll bar uprights corresponding to the sewn-in webbing/loop tab near the top of the auxiliary side panel. Attach the sewn-in loop in the tab to the adhesive strip.
I	4-6"	Wrap horizontally around the rear roll bar upright corresponding to the double-sided hook and loop straps near the bottom of the auxiliary rear panels. Wrap the double-sided hook and loop straps around the adhesive hook strips.
DOOR PANELS		
A	2-12"	Attach horizontally to the inside edge of the side roll bar above the front seat corresponding to the 12" webbing/loop tab. Wrap the webbing/loop tab around the roll bar and attach the loop to the adhesive hook strip.
B	2-12"	Attach horizontally to the inside edge of the side roll bar above the rear seat corresponding to the 12" webbing/loop tab. Wrap the webbing/loop tab around the roll bar and attach the loop to the adhesive hook strip.
C	2-6"	Attach to the top of the bracket between the front and back seats. Attach the sewn-in loop on the 6" webbing/loop tab to the adhesive strip.
D	2-4"	Attach to the inside edge of the side roll bar above the front curve corresponding to the 4" webbing/loop tab. Wrap the webbing/loop tab around the roll bar and attach the loop to the adhesive hook strip.
E	2-6"	Wrap horizontally around the front roll bar upright corresponding to the double-sided hook and loop straps near the top of the front roll bars. Wrap the double-sided hook and loop straps around the adhesive hook strips.
F	2-12"	Attach to the inside edge of the front roll bar corresponding to the 12" webbing/loop tab. Wrap the webbing/loop tab around the roll bar and attach the loop to the adhesive hook strip. If the tab interferes with a windshield, simply cut out a section of the tab to

		accommodate the clamp. After cutting the section, cauterize the edges as you would a nylon rope. SEE INSTRUCTIONS ABOVE.
G	2-6"	Wrap horizontally around the rear roll bar upright corresponding to the double-sided hook and loop straps near the top of the rear roll bars. Wrap the double-sided hook and loop straps around the adhesive hook strips.
H	2-6"	Wrap horizontally around the rear roll bar upright corresponding to the double-sided hook and loop straps near the top of the rear roll bars. Wrap the double-sided hook and loop straps around the adhesive hook strips.
I	2-6"	Wrap horizontally around the rear roll bar upright corresponding to the double-sided hook and loop straps near the top of the rear roll bars. Wrap the double-sided hook and loop straps around the adhesive hook strips.
J	2-4"	ONLY NEEDED IF BACK PANEL IS NOT INSTALLED. IF BACK PANEL IS INSTALLED, ATTACH SEWIN-IN LOOP TO THE SEWN-IN HOOK ON THE BACK PANEL. Attach to the inside edge of the rear roll bars just above the top bend corresponding to the 4" sewn-in loop. Attach the sewn-in loop to the adhesive hook strip.
K	2-31"	ONLY NEEDED IF BACK PANEL IS NOT INSTALLED. IF BACK PANEL IS INSTALLED, ATTACH SEWIN-IN LOOP TO THE SEWN-IN HOOK ON THE BACK PANEL. Attach to the inside edge of the rear roll bars just above the top bend corresponding to the 31" sewn-in loop. Attach the sewn-in loop to the adhesive hook strip.
L	2-5"	Attach vertically to the bottom of the rear roll bar uprights corresponding to the sewn-in loop just above the double-sided hook and loop straps on the bottom rear corner of the door panels. Attach the sewn-in loop to the adhesive hook strips.
M	2-6"	Wrap horizontally around the rear roll bar upright corresponding to the double-sided hook and loop straps near the bottom of the rear roll bars. Wrap the double-sided hook and loop straps around the adhesive hook strips.
N	2-6"	Wrap horizontally around the middle roll bar upright corresponding to the double-sided hook and loop straps near the top of the middle roll bars. Wrap the double-sided hook and loop straps around the adhesive hook strips.
O	2-6"	Wrap horizontally around the middle roll bar upright corresponding to the double-sided hook and loop straps near the top of the middle

		roll bars. Wrap the double-sided hook and loop straps around the adhesive hook strips.
P	2-6"	Wrap horizontally around the middle roll bar upright corresponding to the double-sided hook and loop straps near the middle of the middle roll bars. Wrap the double-sided hook and loop straps around the adhesive hook strips.
Q	2-6"	Wrap horizontally around the front roll bar upright corresponding to the double-sided hook and loop straps near the bottom of the front roll bars. Wrap the double-sided hook and loop straps around the adhesive hook strips.
R	2-6"	Wrap horizontally around the front roll bar upright corresponding to the double-sided hook and loop straps near the bottom of the front roll bars. Wrap the double-sided hook and loop straps around the adhesive hook strips.
S	2-4"	Attach vertically to the body corresponding to the sewn-in loop on the bottom/front of the wing. Attach the sewn-in loop to the adhesive hook strip.
T	2-5"	Attach horizontally to the body corresponding to the sewn-in loop on the bottom/front of the wing. Attach the sewn-in loop to the adhesive hook strip.
TOP CAP		
A	2-6"	Wrap horizontally around the bottom of the rear roll bar uprights. Wrap the double-sided straps at the bottom of the tension strap around the adhesive strip. If needed, loosen the tension on the strap as needed to attach. Do not tighten until the top is aligned on the roll cage.
B	None	Attach the loop on the double-sided hook and loop straps to the exposed hook along the top/middle of the door panels.
C	2-6"	Wrap horizontally around the bottom of the front roll bar uprights. Wrap the double-sided straps at the bottom of the tension strap around the adhesive strip. If needed, loosen the tension on the strap as needed to attach. Do not tighten until the top is aligned on the roll cage.
No Ref	1-54"	OPTIONAL-Attach horizontally to the top of your windshield corresponding to the sewn-in loop in the front visor. Attach the sewn-in loop in the visor to the adhesive strip to hold the visor down when traveling at higher speeds.

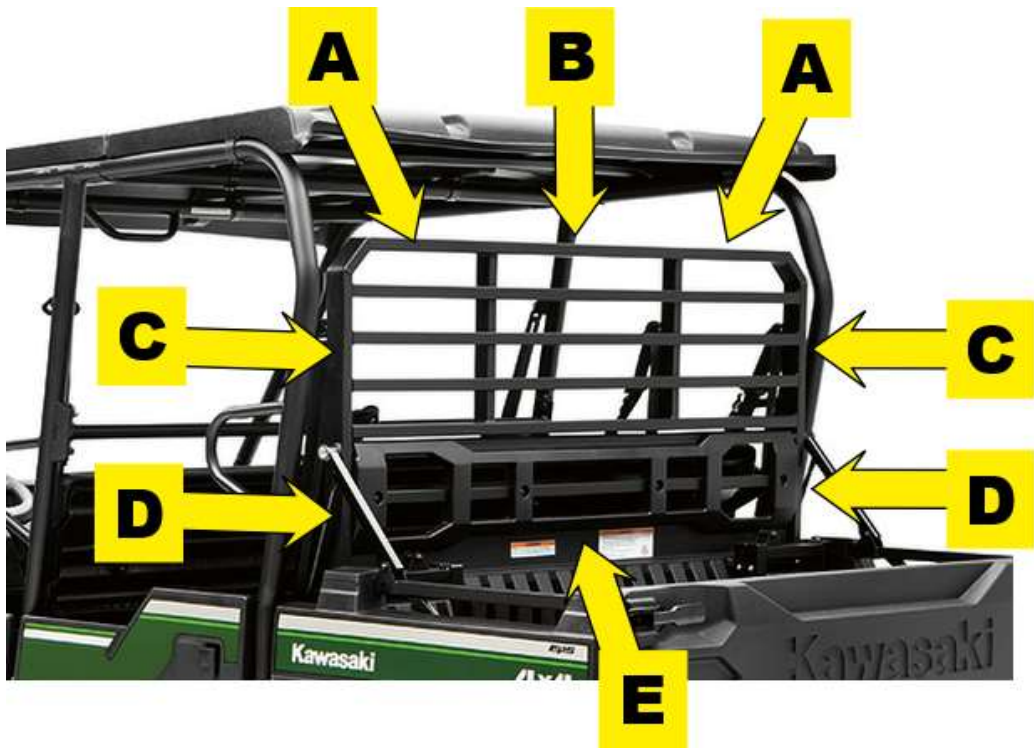

DOOR PANEL

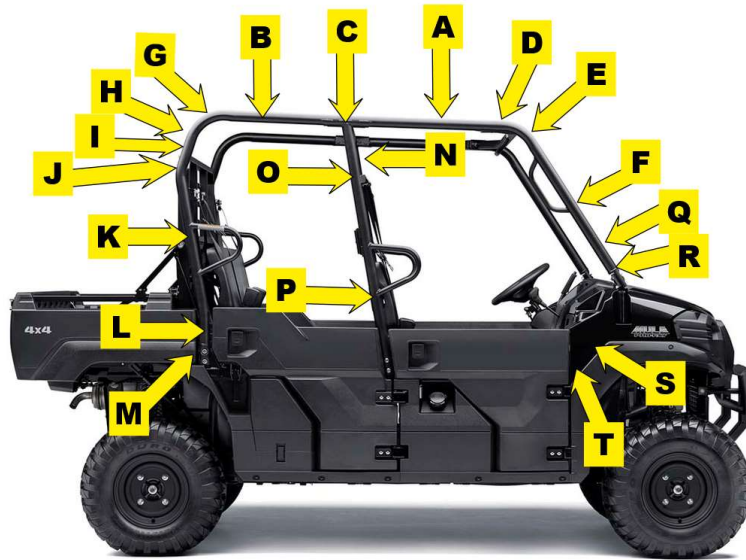

TOP CAP





3 STAR INDUSTRIES

Care Instructions

Heavy Duty Marine and Mil-Spec Military Fabric Cleaning

All 3SI UTV Enclosure Heavy Duty Marine and Military Camo fabrics are guaranteed against excessive loss of color or strength under normal exposure and use conditions. Periodic cleaning with a solution of 4 ounces of bleach and 2 ounces of soap (NOT DETERGENTS) in one gallon of water is recommended to minimize accumulations of dirt, bird droppings and other contaminants which can support surface mildew and stain fabric.

Soft Vinyl Window Cleaning

3SI UTV Enclosure Vinyl Windows will remain clear and provide great visibility under normal exposure conditions if properly cleaned. Periodic cleaning with a solution of 1 ounce of soap in one gallon of water is all that is needed to maintain good window cleanliness and visibility. Caution: DO NOT USE ANY DETERGENTS, WINDOW CLEANERS, SOLVENTS or CHEMICALS OF ANY KIND TO CLEAN VINYL WINDOWS AS THESE WILL CLOUD THE WINDOWS. ALSO, NEVER RUB WINDOWS WITH A DRY CLOTH OR RAG.

Storage Recommendations

Before removing the 3SI UTV Enclosure from your vehicle for storage, clean the Fabric and Vinyl Windows thoroughly as indicated above. Any dirt remaining on the Enclosure may scratch Vinyl Windows while in storage. Once the Enclosure has been cleaned it should be placed on a large flat surface. Lay the Enclosure out so that Vinyl Windows are in a flat position. Fold the doors over the rear panel first then fold the top and windshield on top of the doors keeping the Vinyl Windows flat. Caution: **FOLDING VINYL WINDOWS WILL CAUSE PERMANENT CREASE DAMAGE AND WILL VOID ALL WARRANTIES.** Once the Enclosure is folded keeping all Vinyl Windows flat, begin rolling the Enclosure into an 8" roll. Place the 8" roll into a box and store at normal room temperature. To ensure long life of your enclosure it is best not to store in extreme temperatures.

Hauling

The ONLY products manufactured by 3SI UTV that can be hauled while installed are the hard windshields, full cab enclosures, and door/rear window combos with top and windshield installed. However, the full cab enclosures and door/rear window combos should be tied down before hauling. Speed should not exceed 55 mph while hauling to prevent ripping and shredding of the material and zippers. NEVER HAUL INSTALLED SOFT TOPS, WINDSHIELD TOP COMBOS, AND SUMMER CABS. REMOVE BEFORE HAULING.