







# SEALING SOLUTIONS FOR TILLAGE



To break up the hard soil, tillage will connect to the tractor for overturning, digging or stirring. Most of the time, the media at the outside of the tillage are full of dust and mud. Therefore, the dust prevented function of the tillage is critical. The invasion of the contamination will jam in the bearing causing the malfunction of the tillage.

NAK AP seal labyrinth design creates good sealing function for tillage. We provide various seal solutions including standard seal or customized seal depending on customer requirement. AP seals assure excellent sealing performance under severe dust condition to improve the durability of the tillage and extend the service life.

AP301T	ST16	TC	KMJ1
			

More technical information and customization designs are available upon request. Please contact with us for more information.





# TILLAGE SEALS



Shaft	Size		Type	Drawing No.
	Bore	Width		
1.575	2.575	0.600	AP301T	40443

AP301T






# TILLAGE SEALS



Shaft	Size		Type	Drawing No.
	Bore	Width		
45	70	14/17	ST16	57793
45	70	12/13	ST16	63328

ST16







# TILLAGE SEALS




Shaft	Size		Type	Drawing No.
	Bore	Width		
45	75	12.5	AP6	50086
75	10/11.7		EC2	49939



AP6

EC2

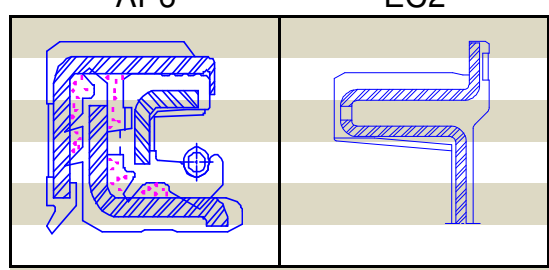



# TILLAGE SEALS




Shaft	Size		Type	Drawing No.
	Bore	Width		
305	330	13	SC	10953
350	390	18	TC	12870



SC

TC

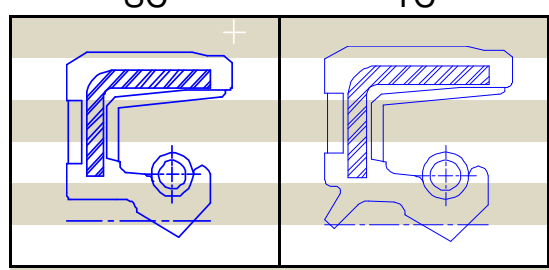






# TILLAGE SEALS



Shaft	Size		Type	Drawing No.
	Bore	Width		
5.615	6	0.500/0.579	KMJ1	57981
4.5	6	0.250/0.4375	SA13	50547
3.63	6	0.625/0.669	ST16	58299
4.375	6	0.625/0.669	ST16	58302
5.433	7.7874	0.625/0.669	ST16	58288
3.375	4.626	0.620	ST34	53920
3.690	6	0.625	ST34	54979
4.375	6	0.625	ST34	54981
4.500	5.5	0.375	TB	50587



KMJ1	SA13	ST16	ST34	TB







# TILLAGE SEALS



VELES-AGRO



Shaft	Size		Type	Drawing No.
	Bore	Width		
53.2	78	13/14	ST16	34961

ST16

