

RELN

Our newest addition to the surface water drainage range.




Large capacity 150mm
channel

Galvanised steel edges,
light commercial rated


Available in convenient,
manageable 1m lengths

Built in integral flange for
easy corner connection

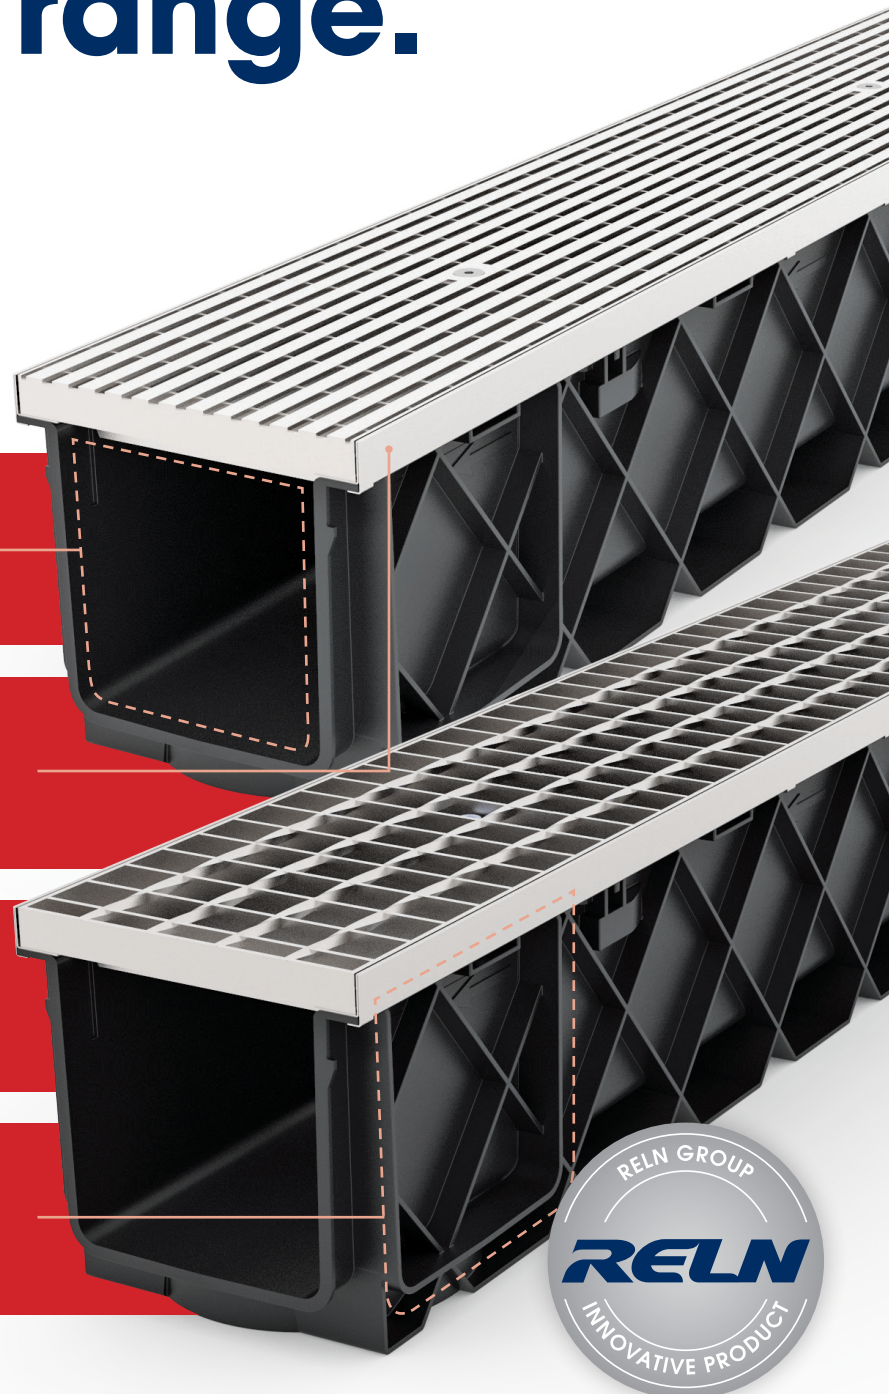


> Features

- RELN Storm Drain Pro is an injection moulded polymer (polypropylene) surface water drainage channel of internal dimensions 150mm wide by 150mm deep. External Dimensions 202mm wide x 205mm deep.
 - Outlet of collected water is via connection to PVC pipe through a multi size bottom outlet socket.
 - Corners can be made by cutting out the side of the channel and connecting at the integral side flange.
 - The channel has a tongue and groove assembly joint for each end with side clips to hold the channel firmly connected.
- Locking bars for anti-tamper - Proven Criss/Cross design - Galvanised edges Standard

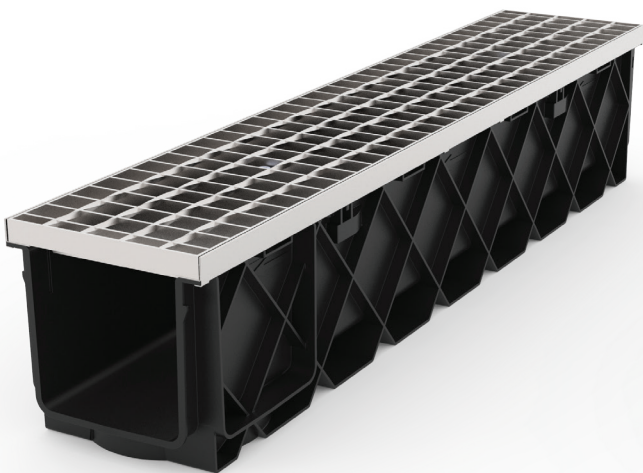

Storm Drain Pro with Galvanised Class B Grate

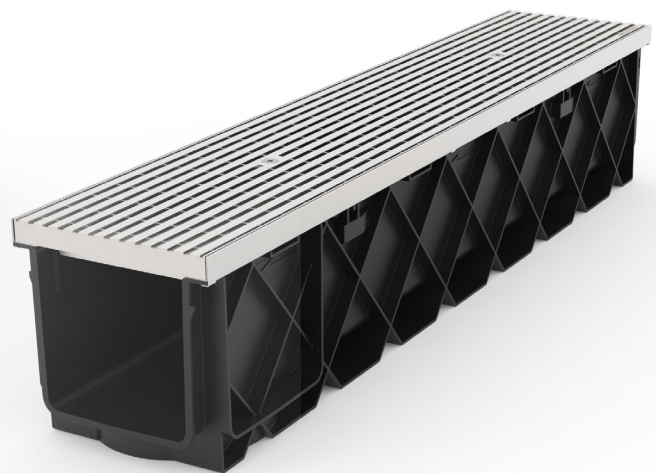

Storm Drain Pro with Heel Guard

Code	Description	Actual Wt.	Nominal Reported Wt.
210010	RELN Storm Drain Pro – AU – c/w Class B Gal Grate	9.67kg	9.7kg
210012	RELN Storm Drain Pro – AU – c/w Class B H/Guard Gal Grate <i>Coming Soon</i>	8.94kg	9.0kg
210014	RELN Storm Drain Pro – AU – c/w Class B H/Guard Anti-Slip Gal <i>Coming Soon</i>	8.82kg	9.0kg
210016	RELN Storm Drain Pro – AU – c/w Class C Gal Grate <i>Coming Soon</i>	12.95kg	13.0kg

> Accessories



Storm Drain Pro - End Cap

Product Code: 210002
Weight: 115gm



Storm Drain Pro - Leaf Guard

Product Code: 210003
Weight: 77gm



For further information on all RELN products,
visit www.reln.com.au
Call: 1300 137 356
Email: sales@reln.com.au

RELN.com.au