


Shade N' Shelters

## Owner's Manual

### Cedar Falls









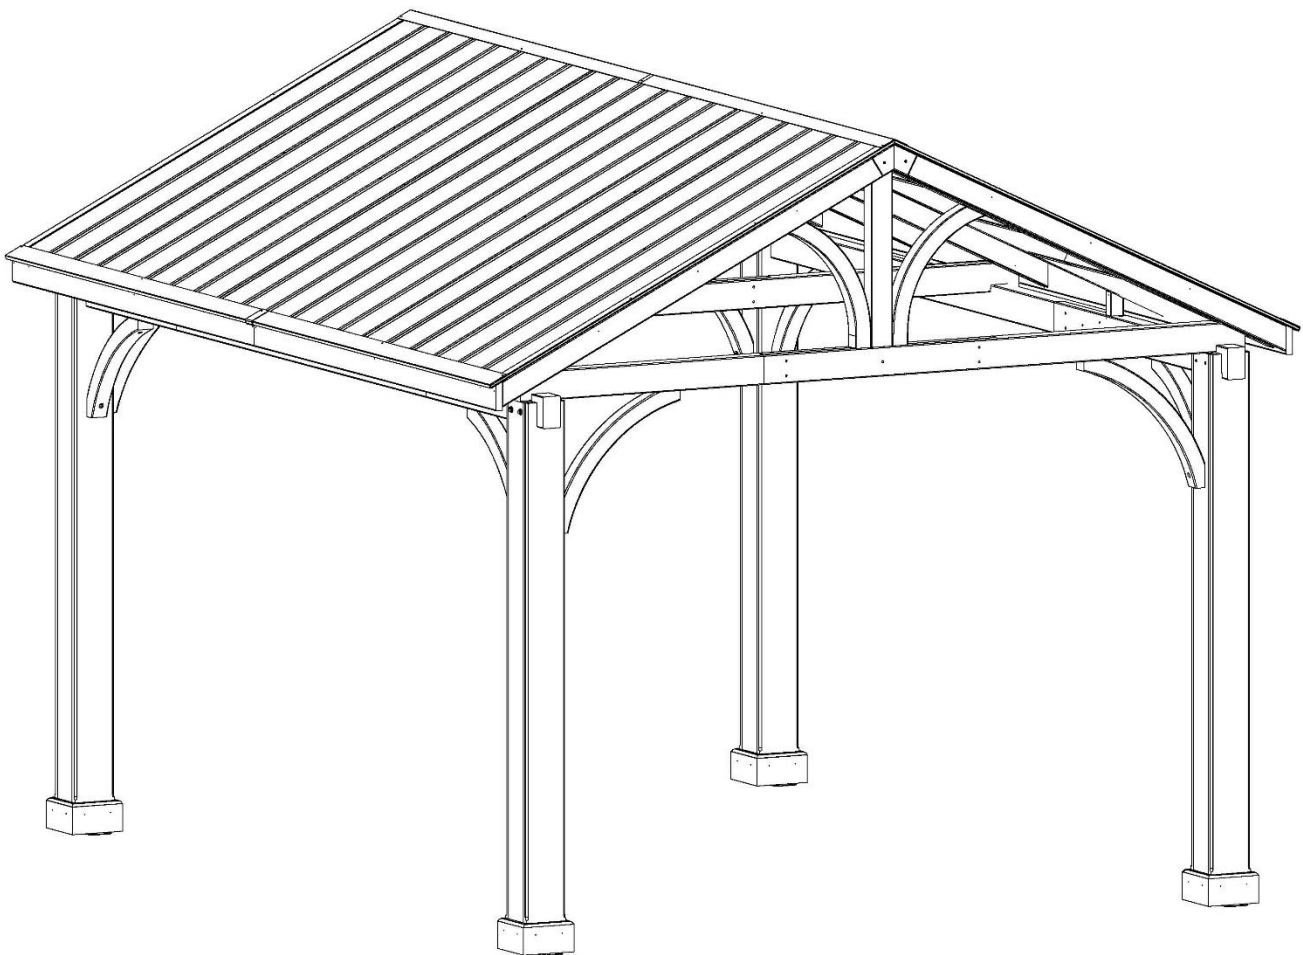


### 12' x 14' Wood Hard Top Pavilion



























Note: This pavilion frame is designed to be used as a permanent fixture. For more information, please visit <https://shadenshelters.com>.













# Parts List

## Cedar Falls 12' x 14' Wood Pavilion

Letter	Illustration	Description	Qty.
A		Post	2
B		Post	2
C		Base Cover	16
D1		Long Crossbar - Left	2
D2		Long Crossbar - Middle	2
D3		Long Crossbar - Right	2
E1		Short Crossbar - Left	2
E2		Short Crossbar - Right	2
E3		Short Crossbar - Left	1
E4		Short Crossbar - Right	1
F		Roof Rafter	3

Letter	Illustration	Description	Qty.
G		Roof Rafter	6
H		Roof Rafter	6
I		Corner Support - Left	4
J		Corner Support - Right	4
K		Roof Rafter	4
L		Roof Support Rafter	12
M		Roof Rafter	2
N		Roof Rafter	4
O1		Side Rafter	2
O2		Side Rafter	2
P		Roof Panel	8
Q1		Rood Panel Trim	2

Letter	Illustration	Description	Qty.
Q2		Rood Panel Trim	2
R		Roof Cap	2
S1		Roof Panel Trim	2
S2		Roof Panel Trim	2
T		L Shape Bracket	8
U		Support Wood	4
V		V Shape Bracket	2
W		Base Plate	8
X		Roof Plate	2
Y		Stake	16
AA		M10 x 140mm Bolt	8
BB		M8 x 70mm Bolt	16

Letter	Illustration	Description	Qty.
CC		M8 x 60mm Bolt	35
DD		M6 x 40mm Screw	52
EE		M6 x 25mm Screw	4
FF		M5 x 50mm Screw	126
GG		M5 x 40mm Screw	15
HH		M5 x 40mm Screw	56
II		M10 Washer	8
JJ		M8 Washer	35
KK		M8 Washer	16
LL		M5 Plastic Washer	56
MM		Open Wrench	2
NN		Socket Wrench	1

# Assembly Instructions


## Cedar Falls 12' x 14' Wood Pavilion

### Important:

- Read all the instructions before assembly. Failure to do so may result in faulty assembly and potential injury.
- Before assembling the product, remove all protective materials, hardware kit(s), and identify all parts packed in the carton are present. (Note: If any part is missing or damaged, do not attempt to assemble). Contact Shade N' Shelters Customer Support. See page 32.
- Assemble on a stable level surface to avoid damage to gazebo and possible injury.
- Two people are required to assemble this product.
- Gazebo dimensions are measured from roof corner to roof corner.


**WARNING: DO NOT TIGHTEN BOLTS UNTIL NOTED AFTER EACH STEP!**

### Roof Assembly Overview

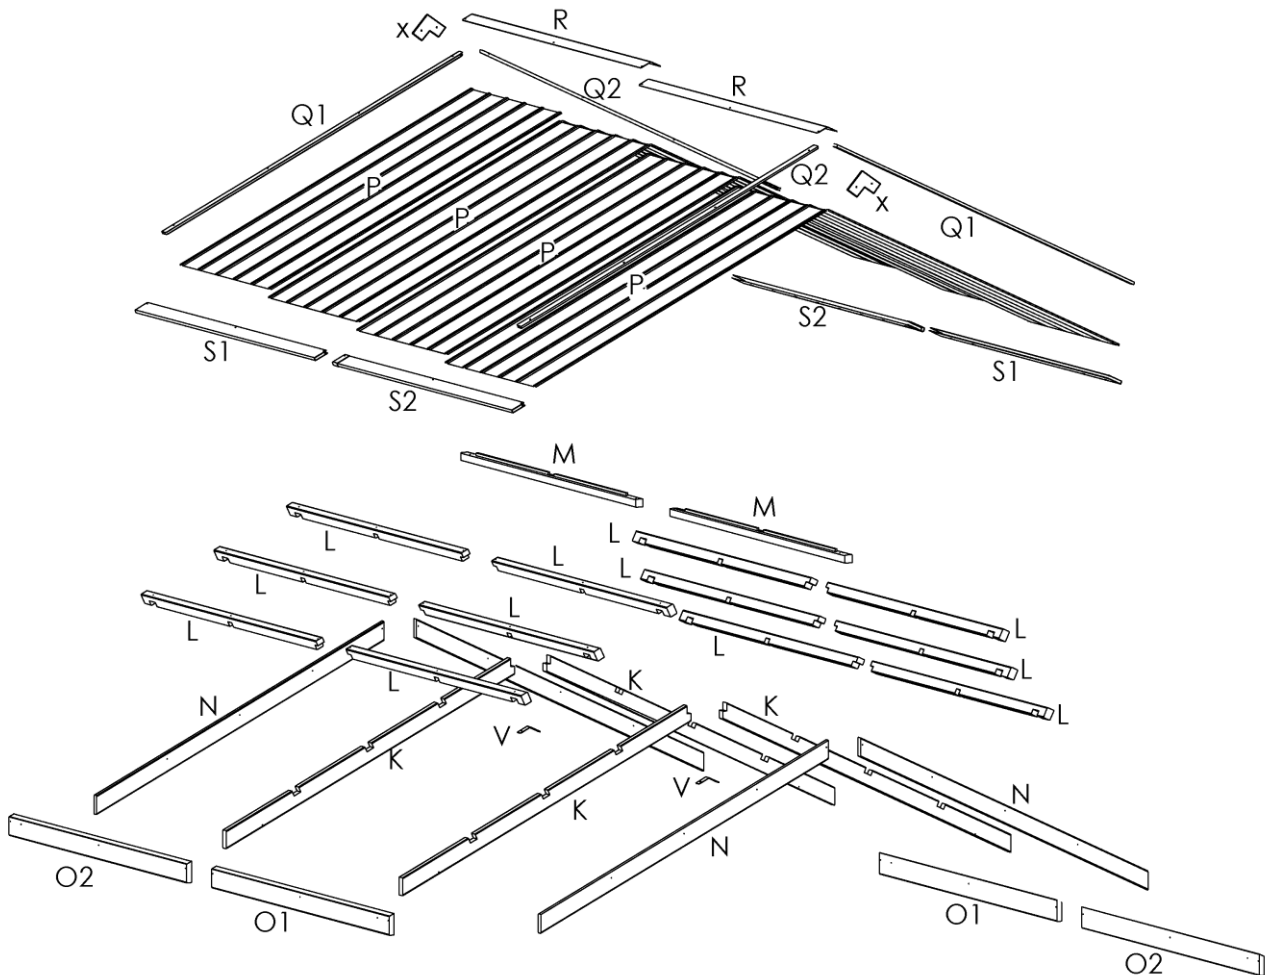




**Step 1:** Attach the Base Plate (W) to Posts (A & B) using Screws (DD). Attach the Base Cover (C) to the Posts (A&B) using Screws (FF). See Figure 1.

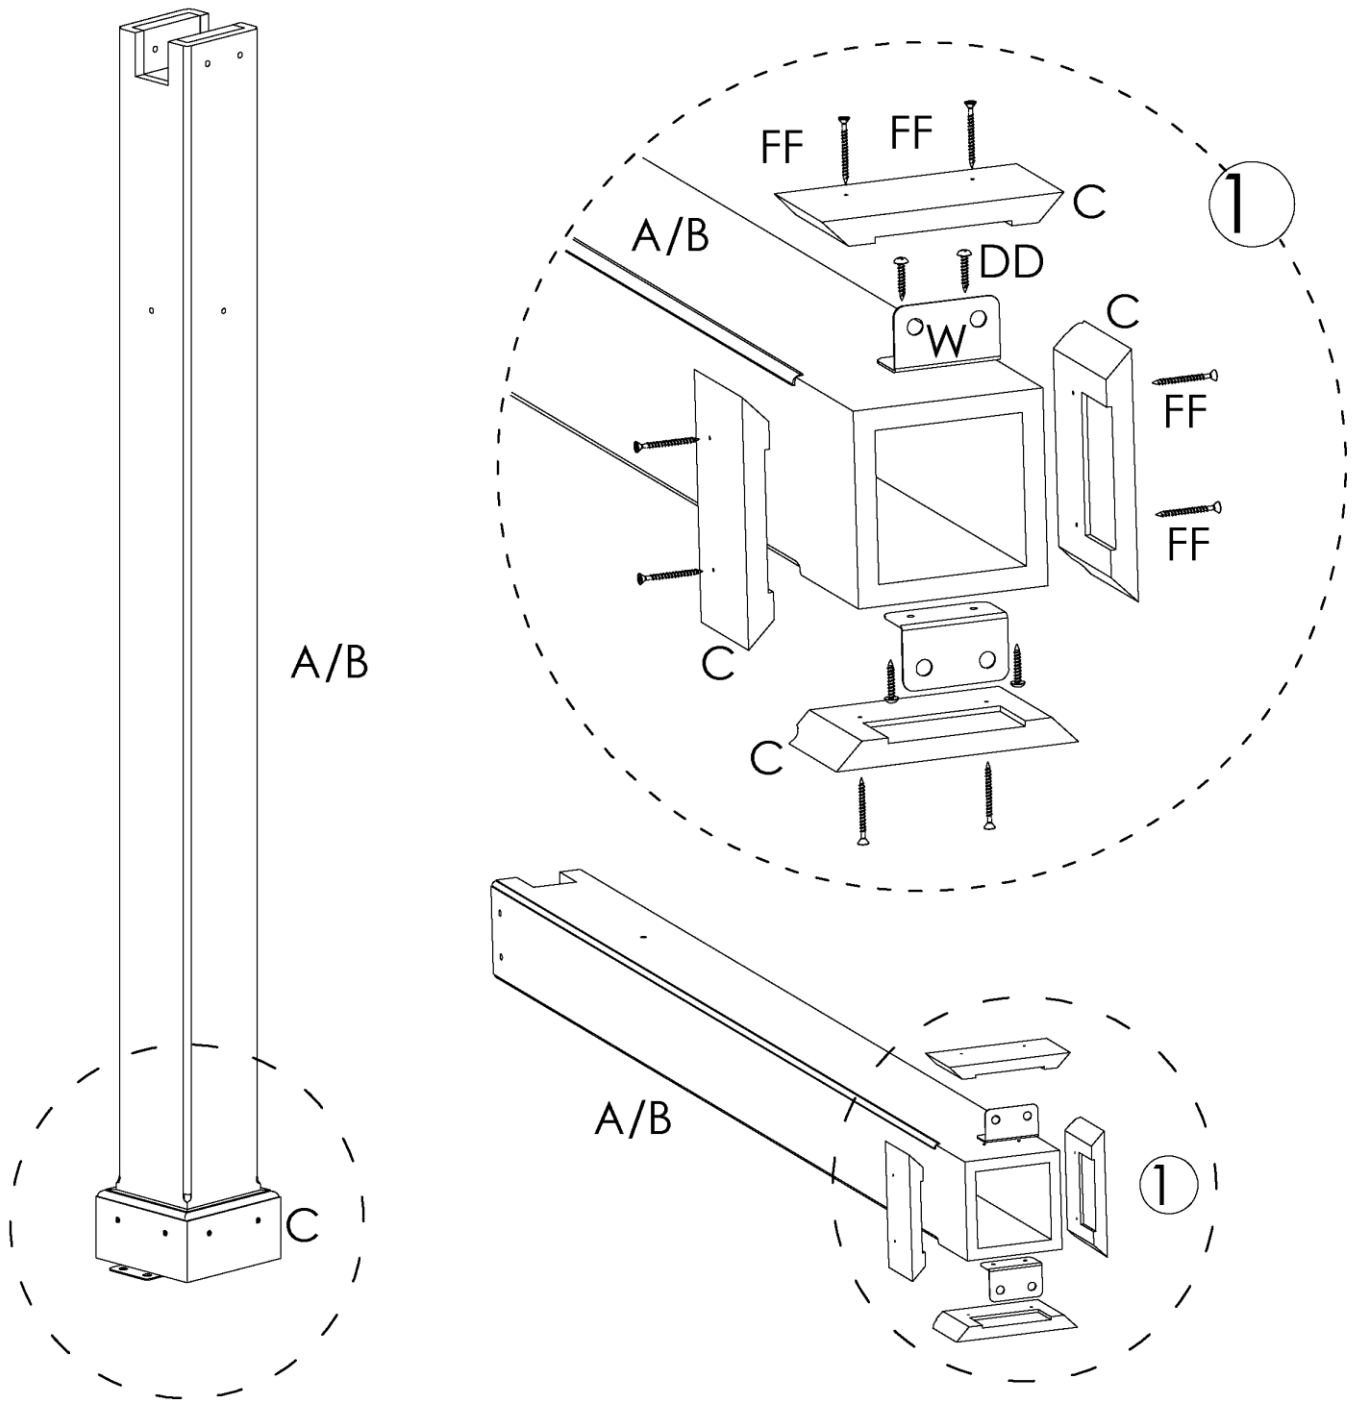

**Figure 1**




**Step 2:** Attach Long Crossbars (D1, D2, & D3) together using Bolts (CC) and Washers (JJ). See Figure 2.

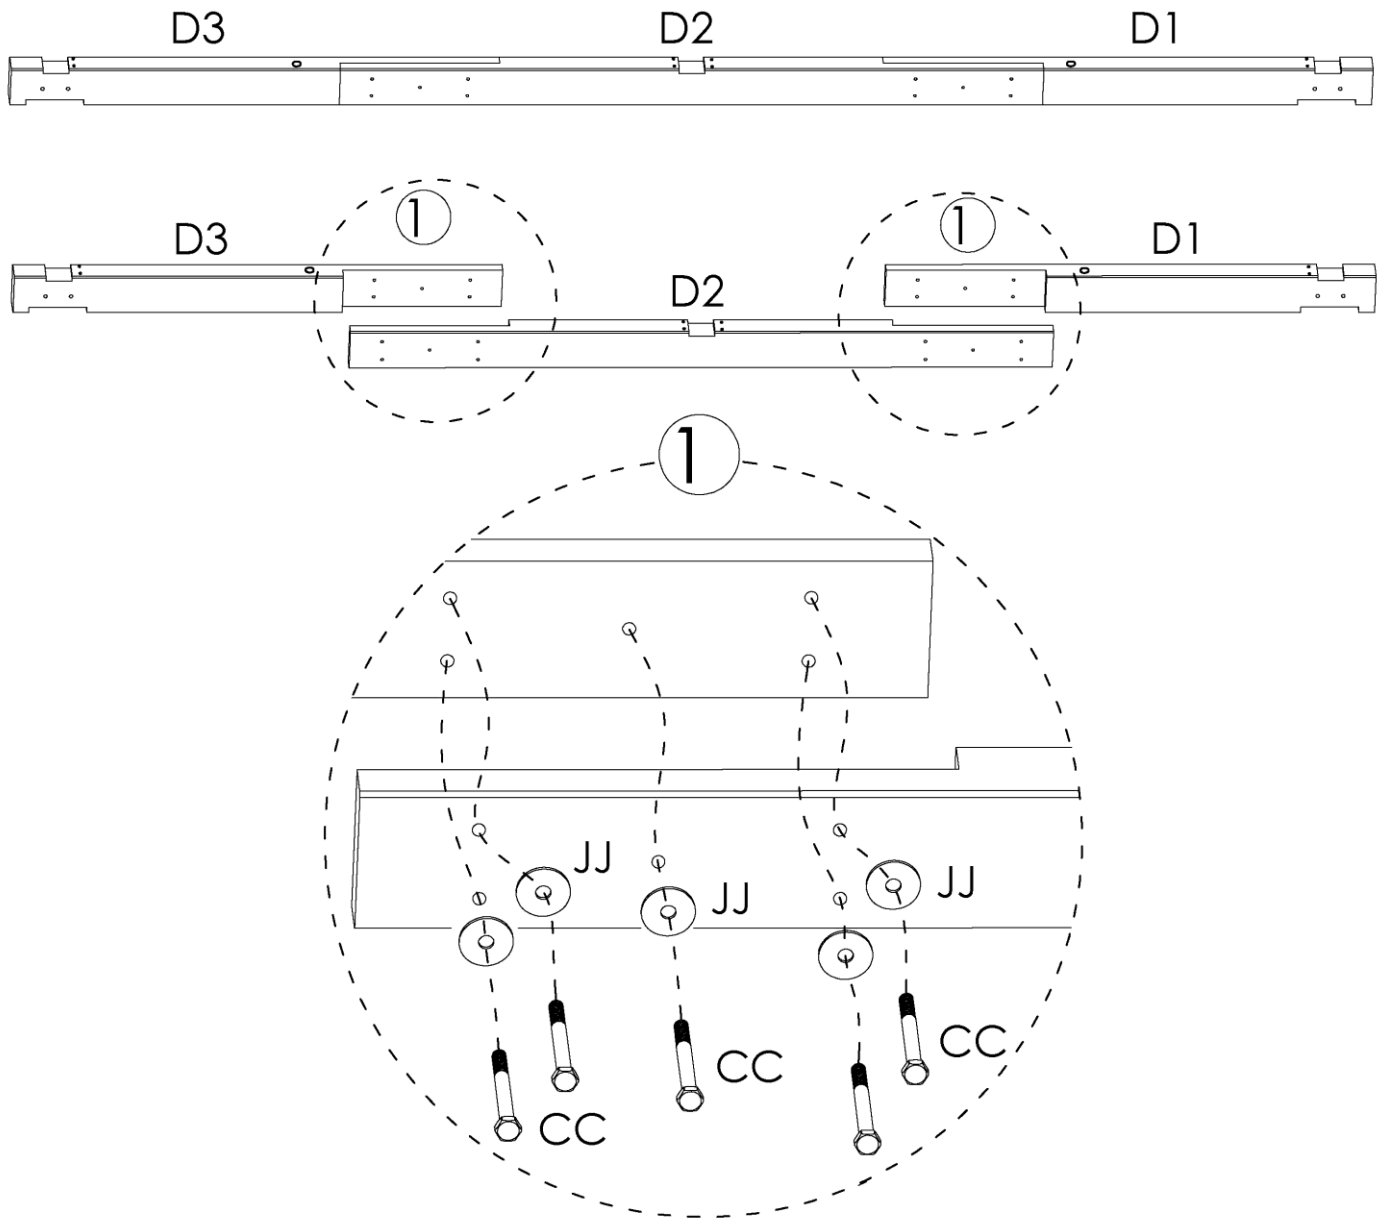


**Figure 2**

**Step 3:** Attach Short Crossbars E1 and E2 together using Bolts (CC) and Washers (JJ). See Figure 3.

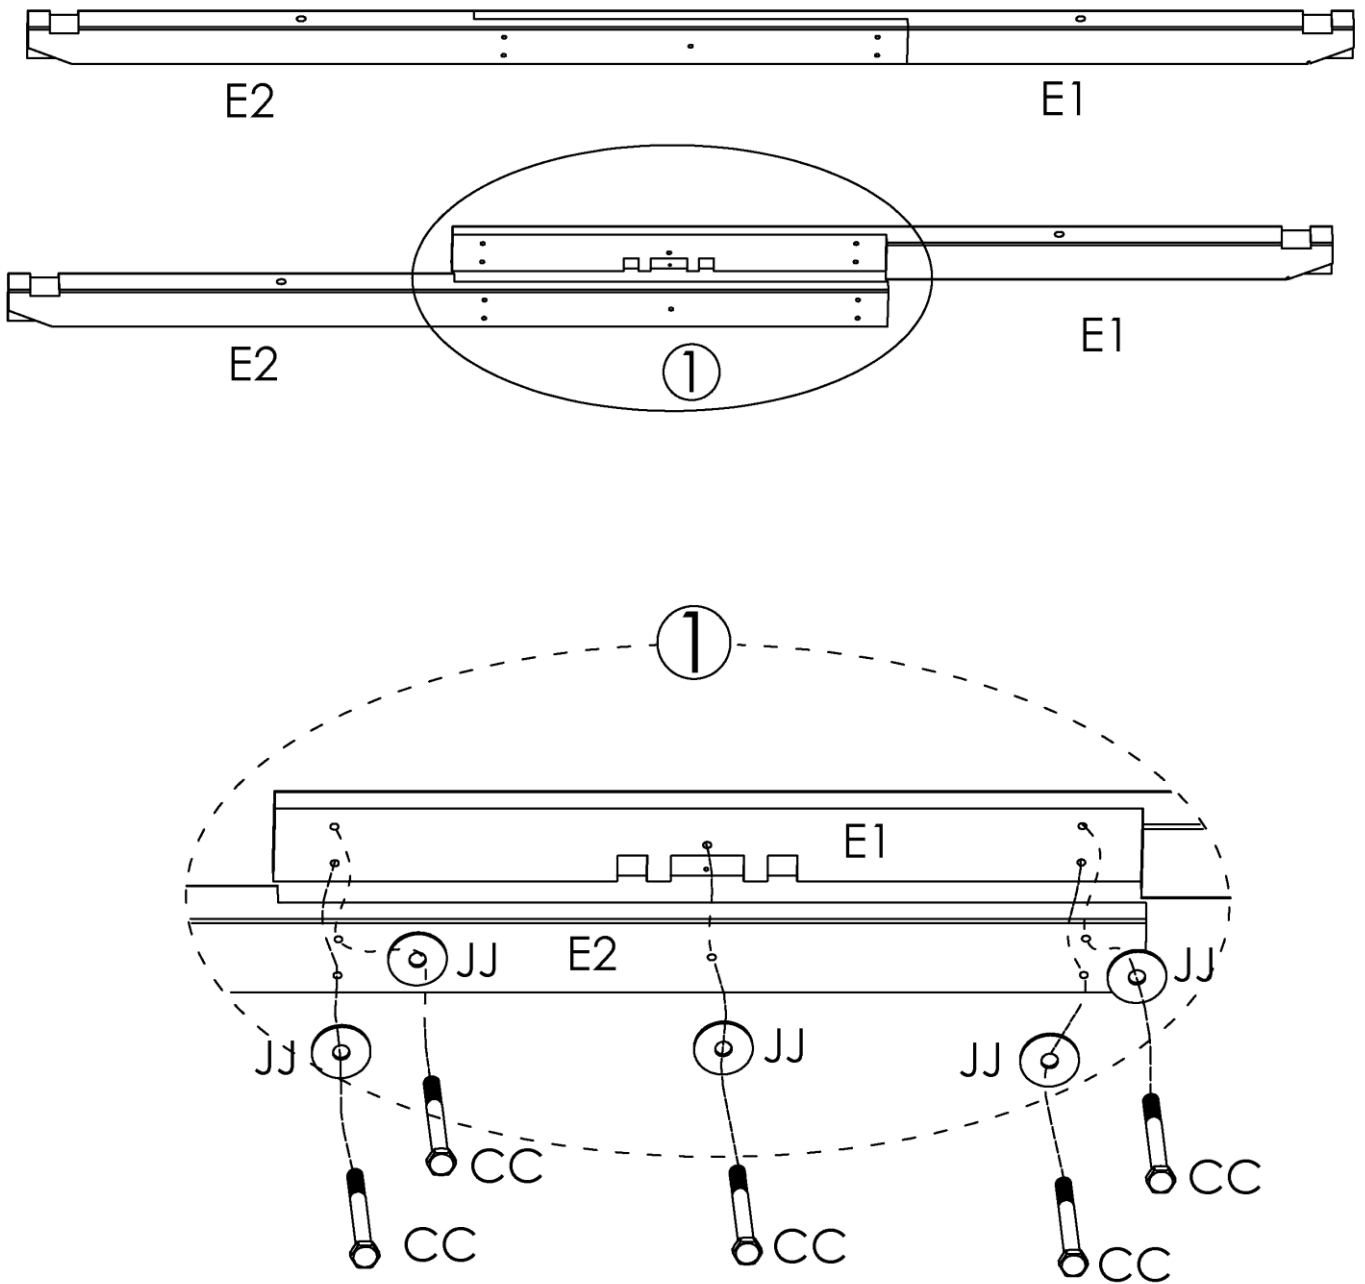


**Figure 3**

**Step 4:** Attach Short Crossbars E3 and E4 together using Bolts (CC) and Washers(JJ). See Figure 4.

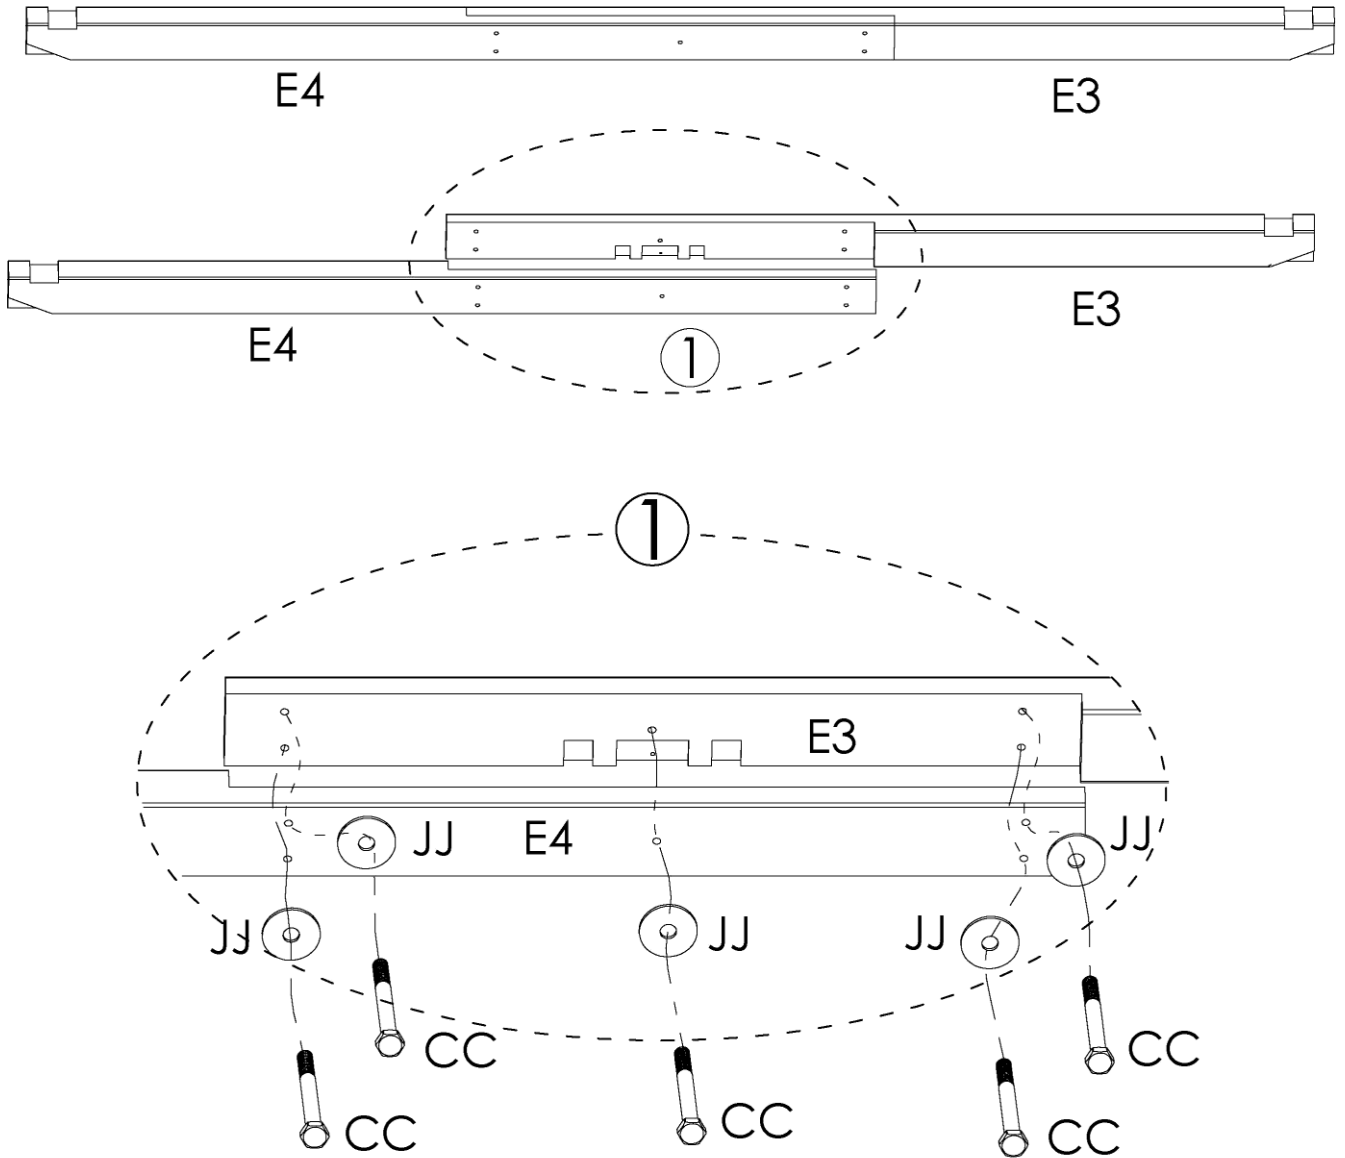


**Figure 4**

**Step 5:** Insert Roof Rafters (F and G) into the assembled Short Crossbeams (E1 and E2). Insert the Roof Rafter (H) into Short Crossbeams (E1 and E2) and Roof Rafter (F). Secure Roof Rafter (F) by drilling in Screw (GG). Attach Roof Rafter (H) to Roof Rafter (G) using Bolts (FF). See Figure 5. Repeat for remaining assembled Short Crossbeams (E1 and E2).

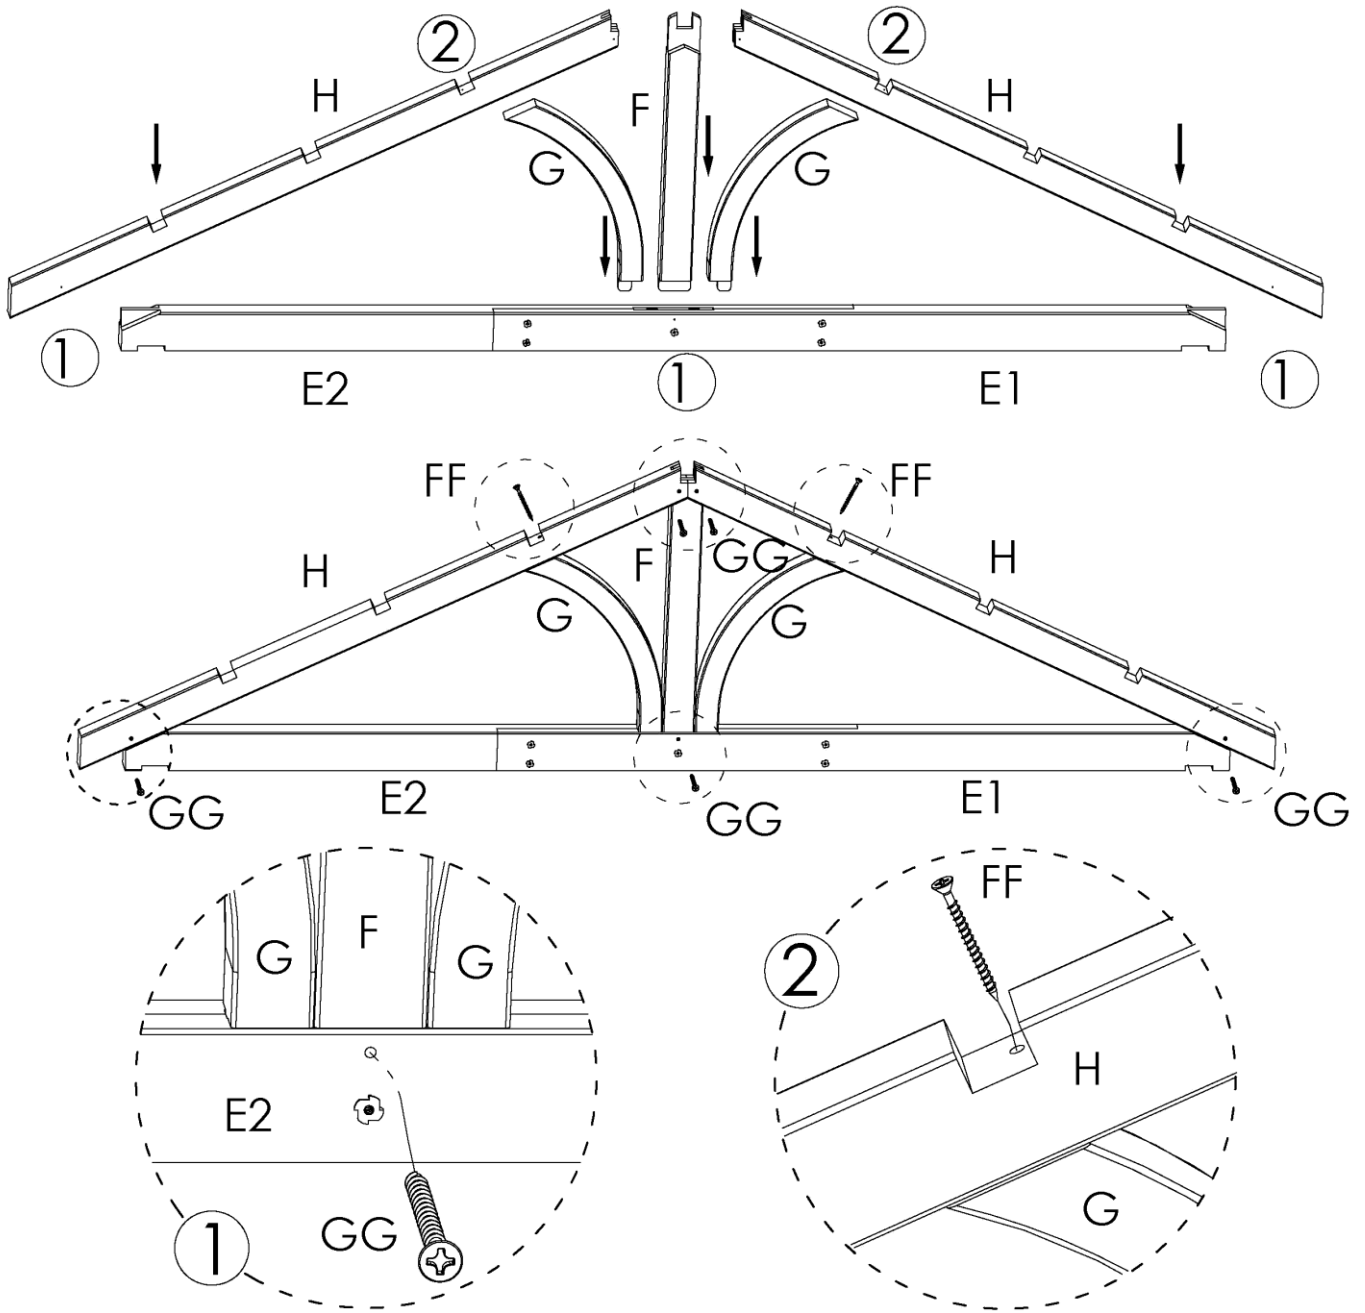


**Figure 5**

**Step 6:** Insert Roof Rafters (F and G) into the assembled Short Crossbeams (E3 and E4). Insert the Roof Rafter (H) into Short Crossbeams (E1 and E2) and Roof Rafter (F). Secure Roof Rafter (F) by drilling in Screw (GG). Attach Roof Rafter (H) to Roof Rafter (G) using Bolts (FF). See Figure 6. Repeat for remaining assembled Short Crossbeams (E3 and E4).

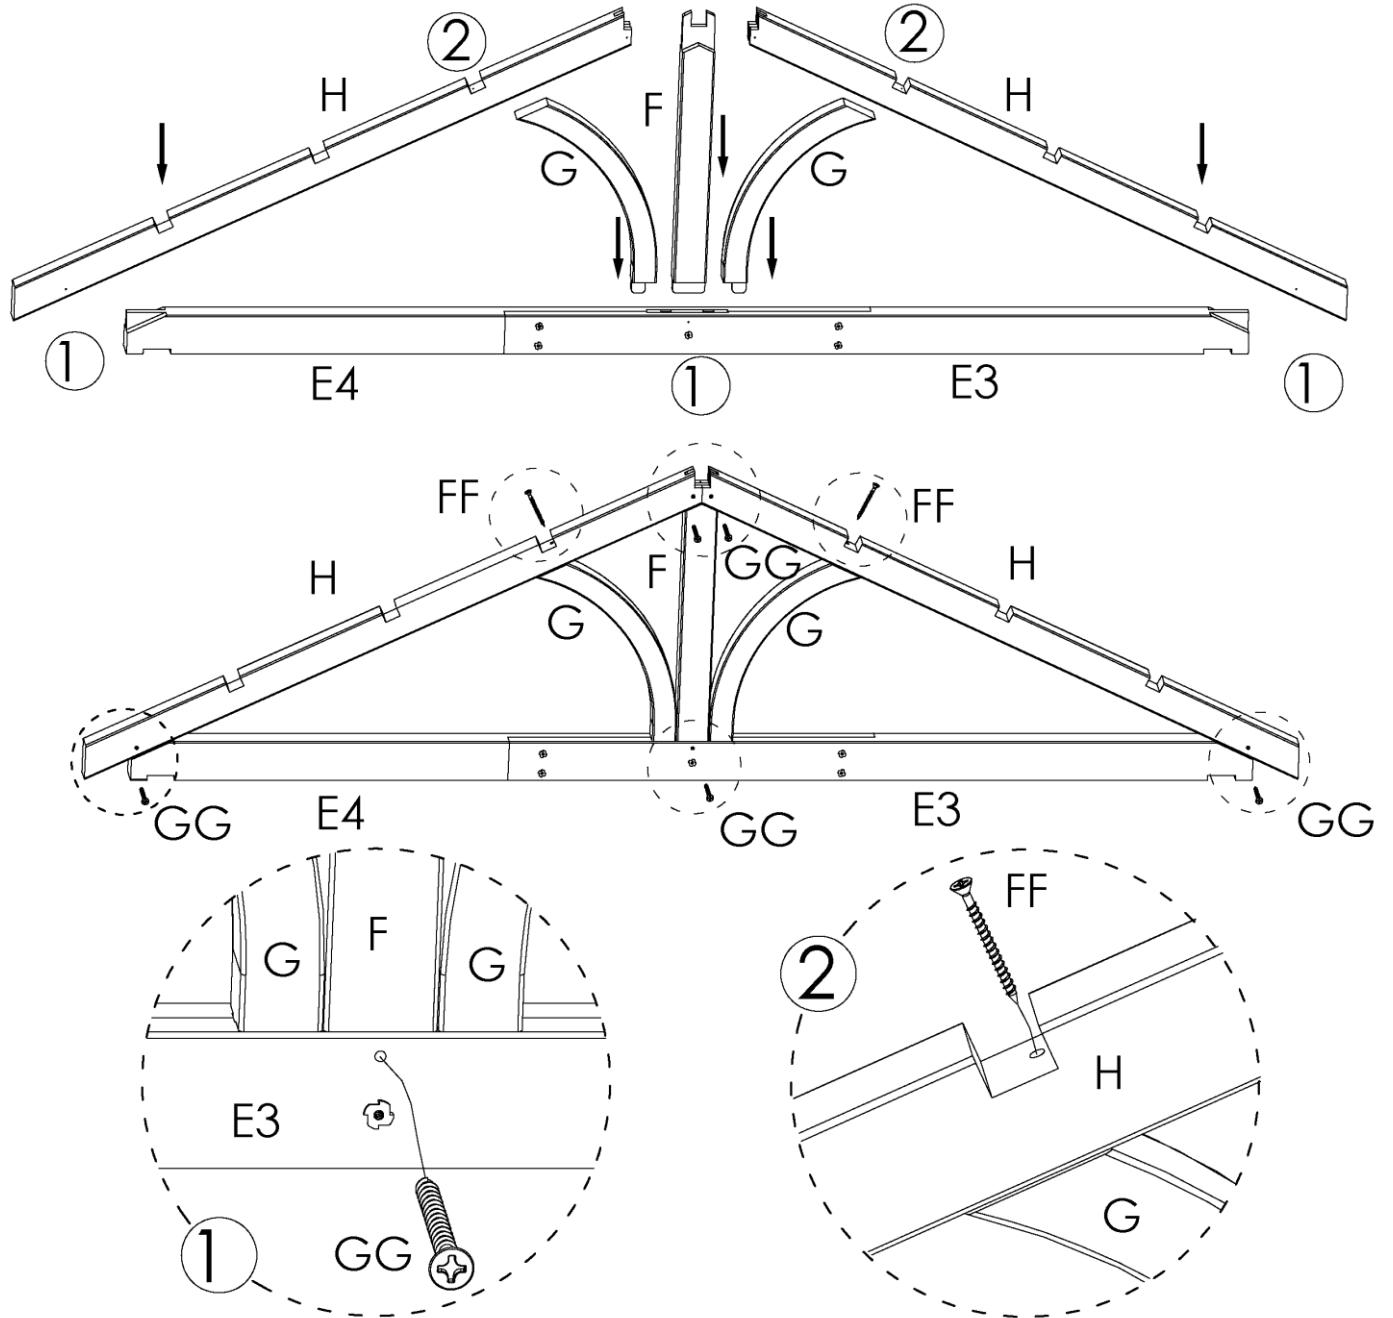


**Figure 6**

**Step 7:** Attach the assembled Long Crossbeams (D1, D2 and D3) to Posts (A and B) using bolts (AA) and Washers (II). See Figure 7.

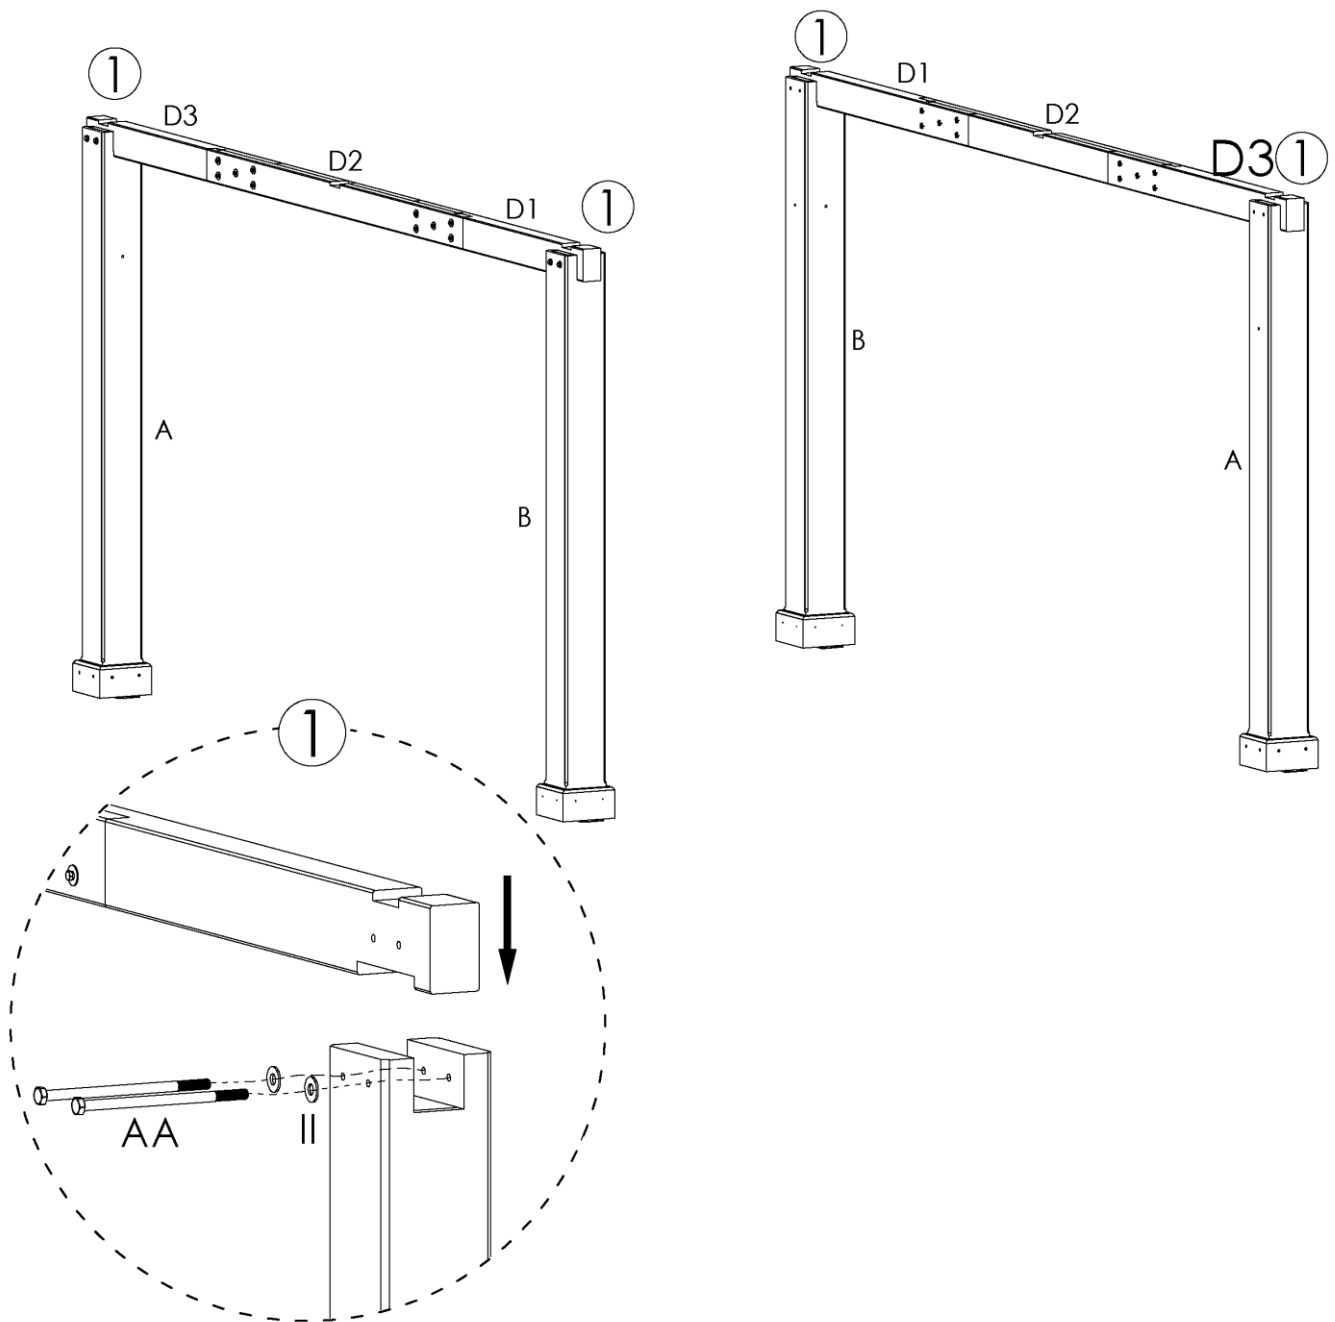


**Figure 7**

**Step 8A:** Attach the trusses to the Long Crossbeams (D1 and D3) using the L Shaped Bracket (T) and Screws (DD). See Figure 8.

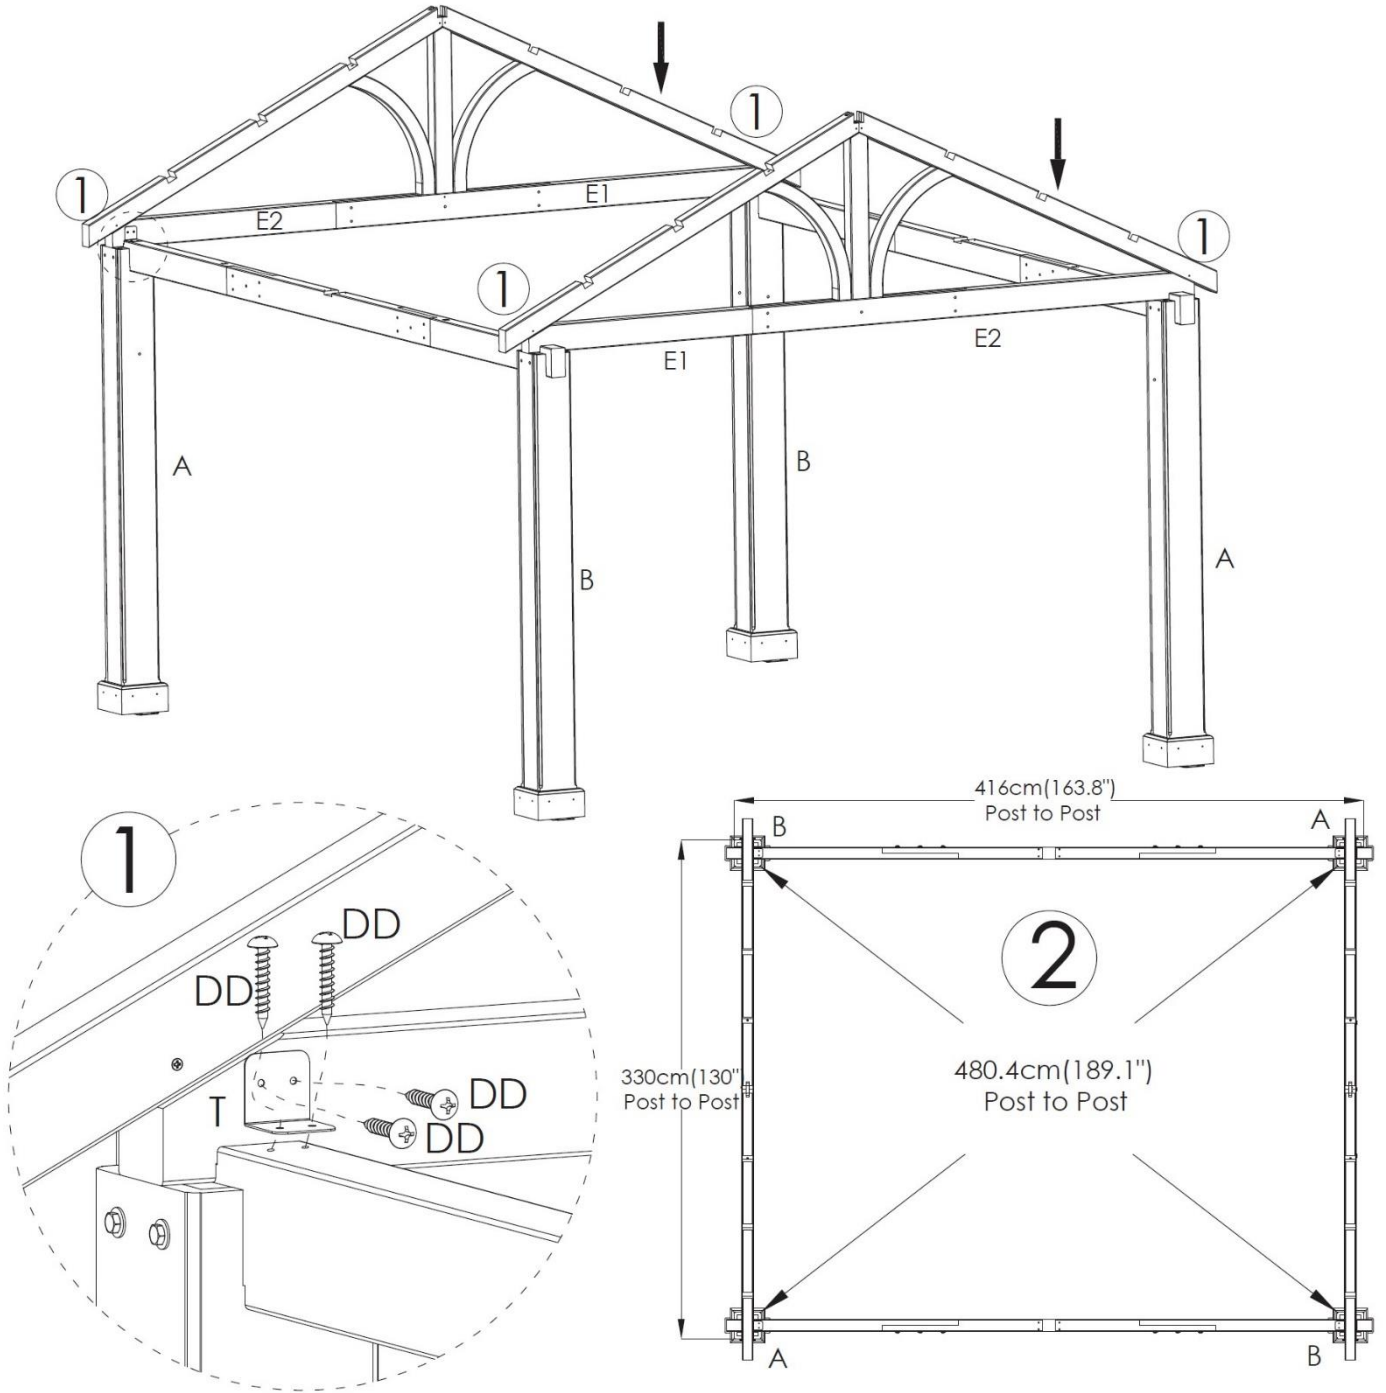

**Figure 8**


**Step 9:** Attach truss to both side of Long Crossbeam (D3) using the L Shaped Bracket (T) and Screws (DD). See Figure 9.

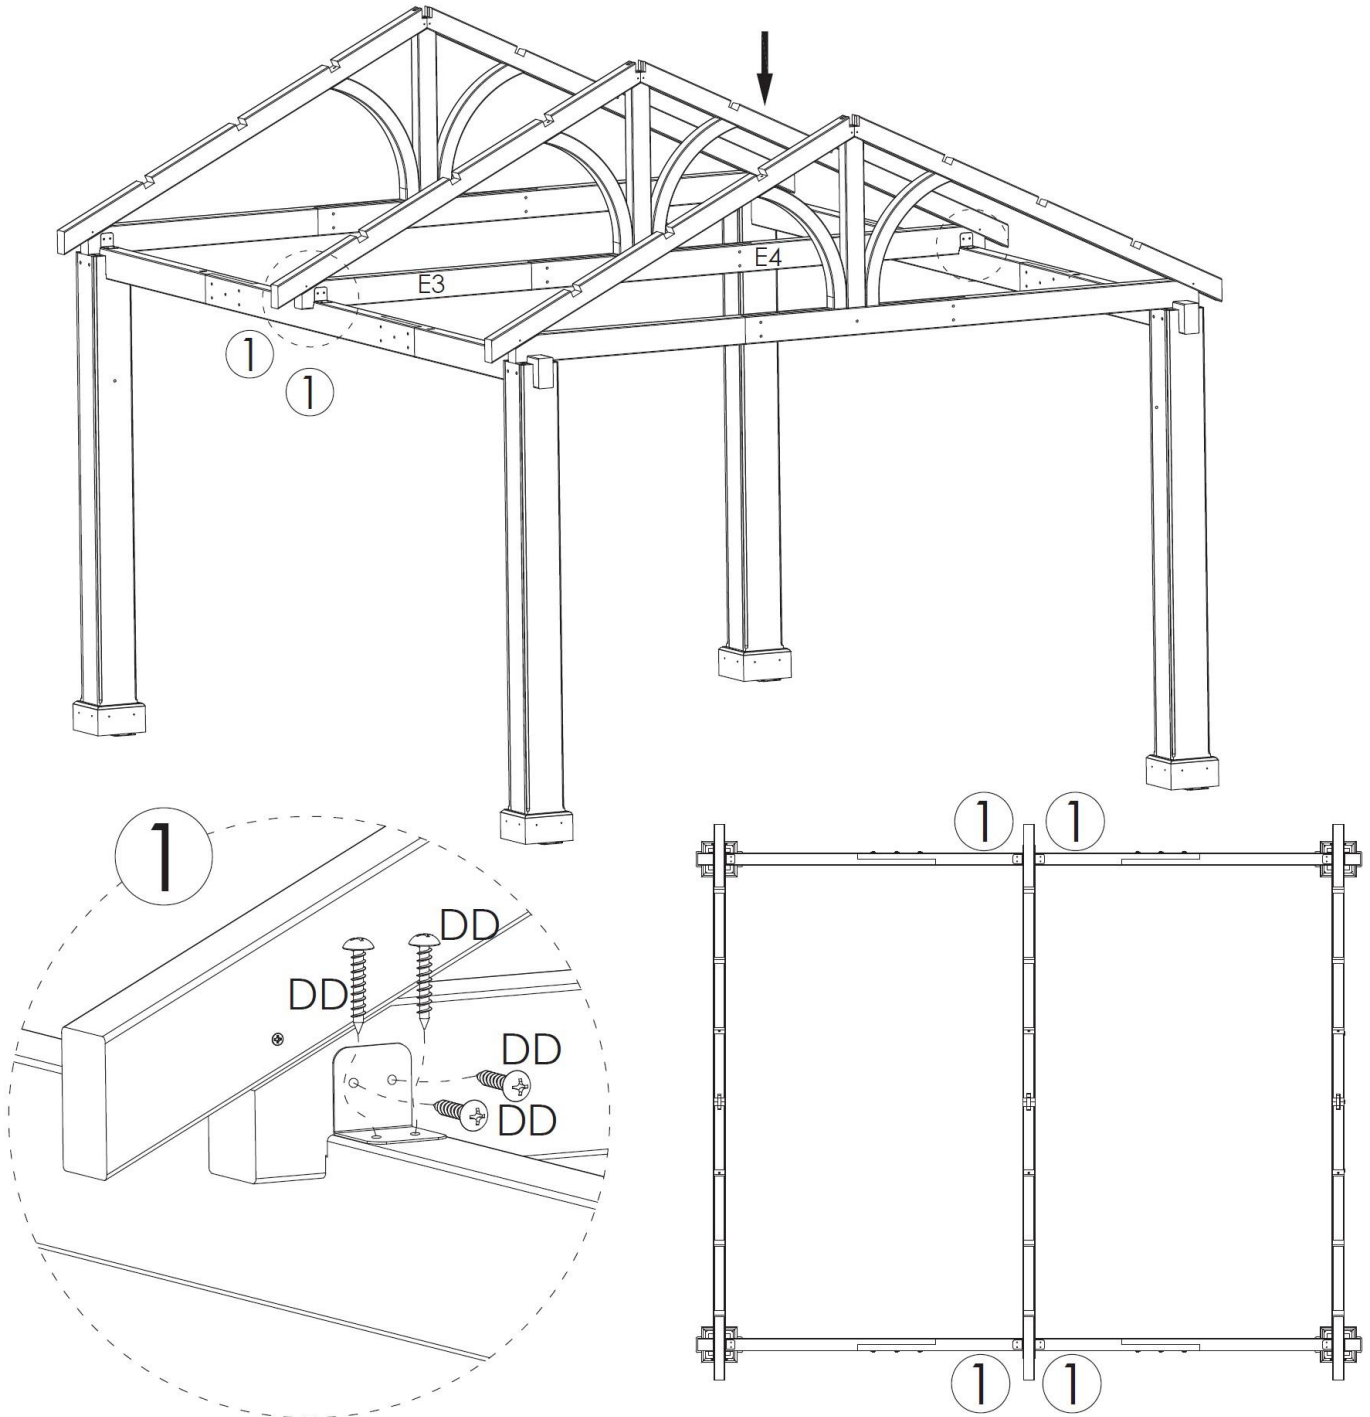

**Figure 9**




**Step 10:** Attach the Corners Supports (I) to the 12 foot sides and attach the Corner Supports (J) to the 16 foot side using Bolts (BB) and Washers (KK). See Figure 10.

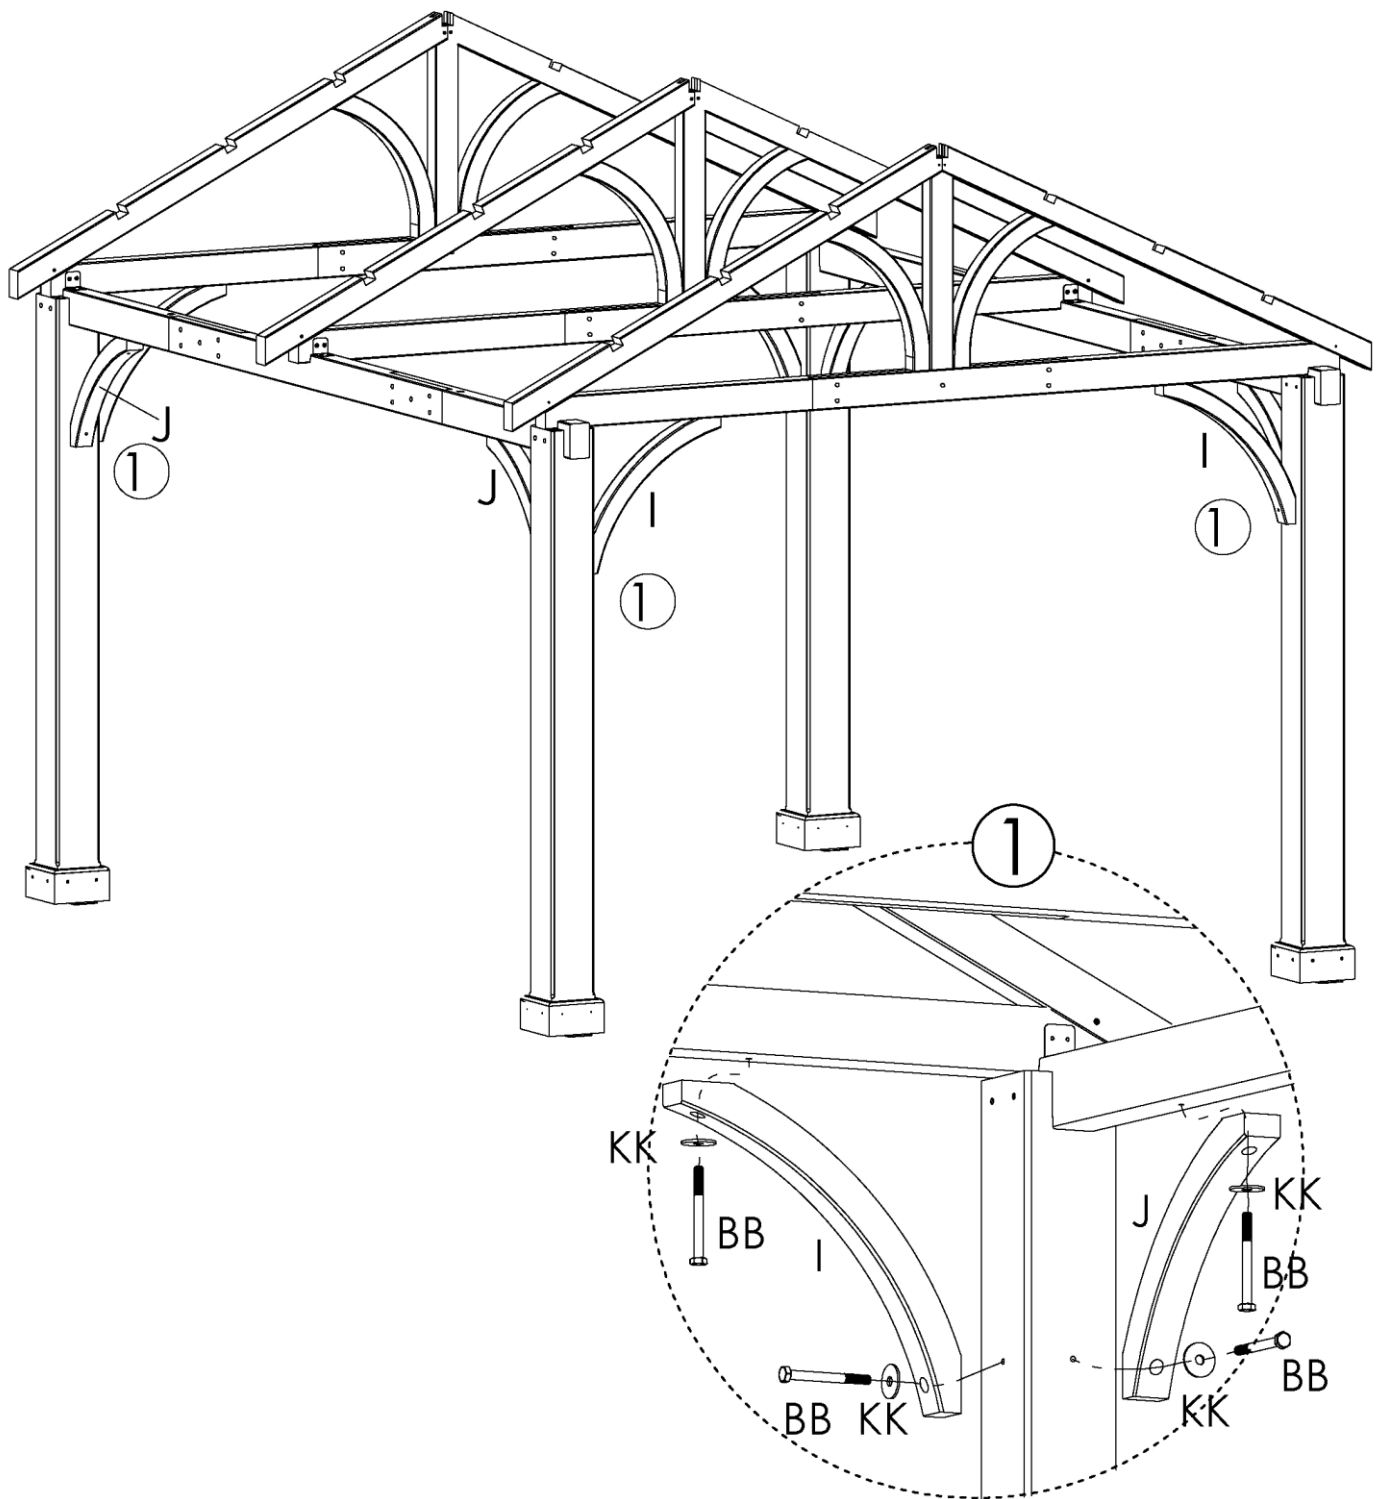


**Figure 10**

**Step 11:** Insert the Roof Rafters (M) into the top of the trusses. Attach the Roof Rafters (M) to the Middle truss using Screws (FF). See Figure 11.

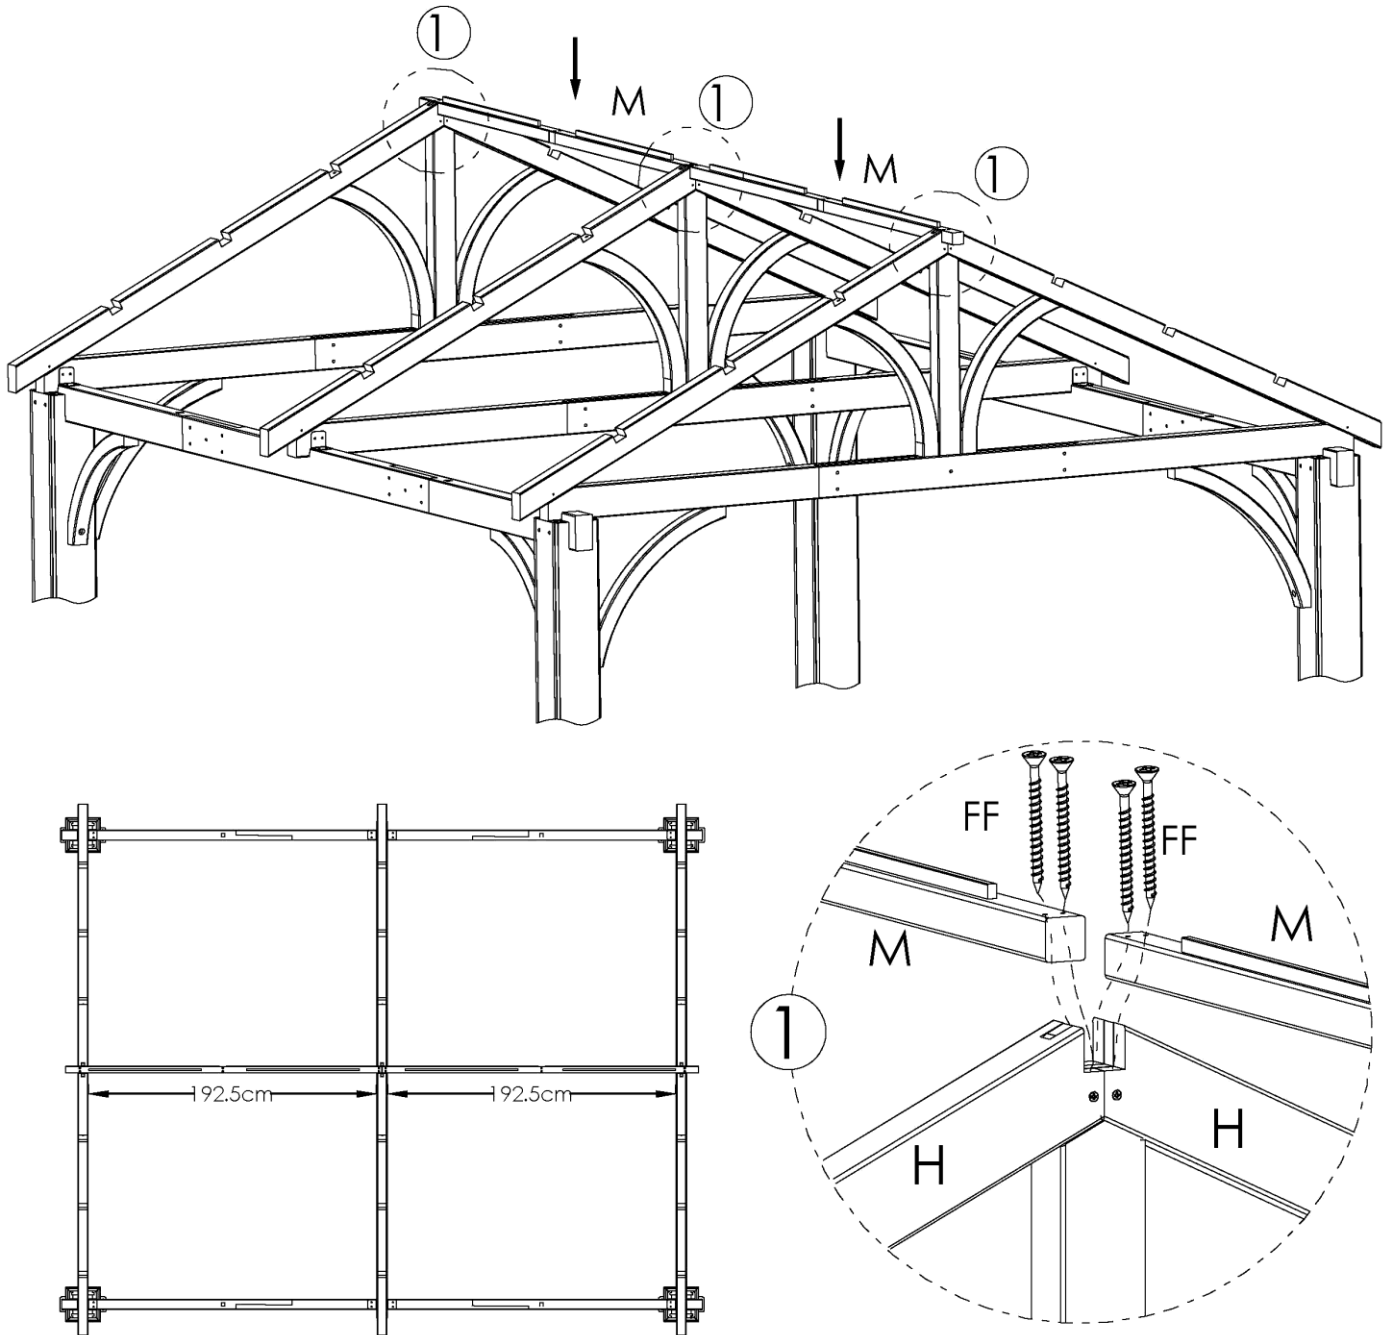

**Figure 11**

**Step 12:** Insert the Support Wood (U) into the Long Crossbeams (D1 and D3) See Figure 12.

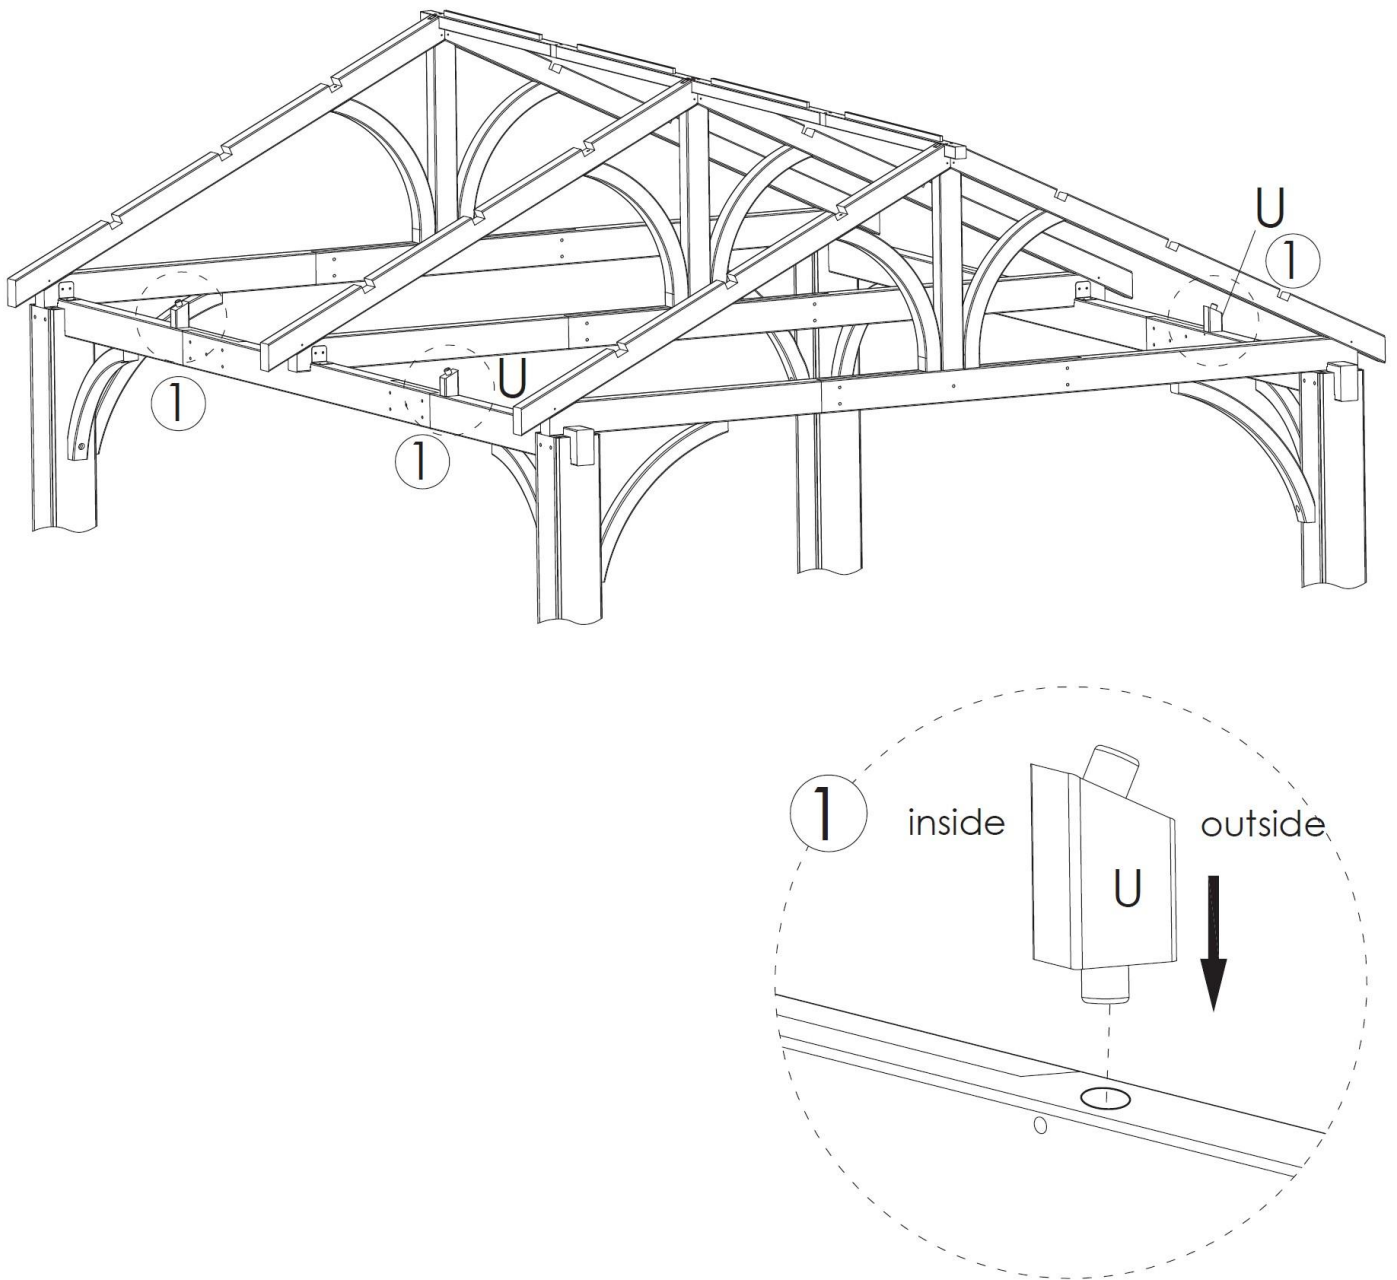


**Figure 12**

**Step 13A:** Attach the Roof Rafters (M) to Roof Rafter (K) using Screws (FF). See Figure 13.1


**Step 13B:** Attach the V Shape Bracket (V) to the Roof Rafter (K) using Screws (DD). See Figure 13.2

**Step 13C:** Secure the Support Wood (U) by screwing in Screw (FF). See Figure 13.3

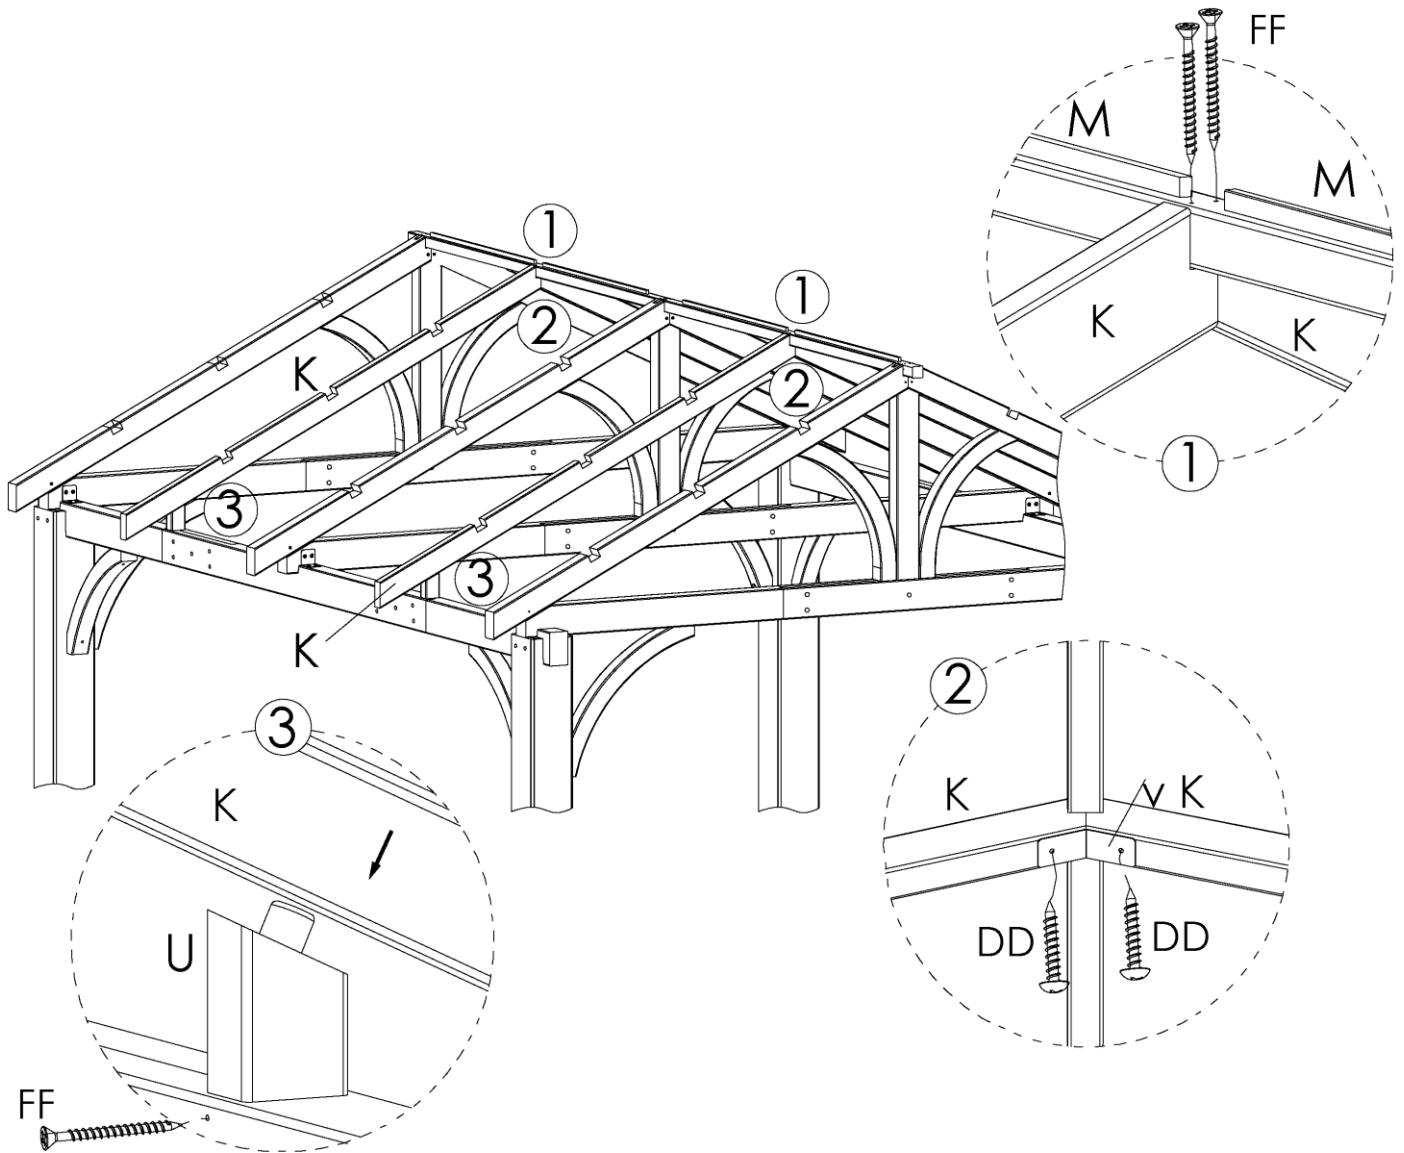


**Figure 13**

**Step 14:** Attach Roof Support Rafter (L) to Roof Rafter (H and K) using Screws (FF). See Figure 14.1, 14.2 and 14.3. Repeat for other Roof Support Rafters (L).

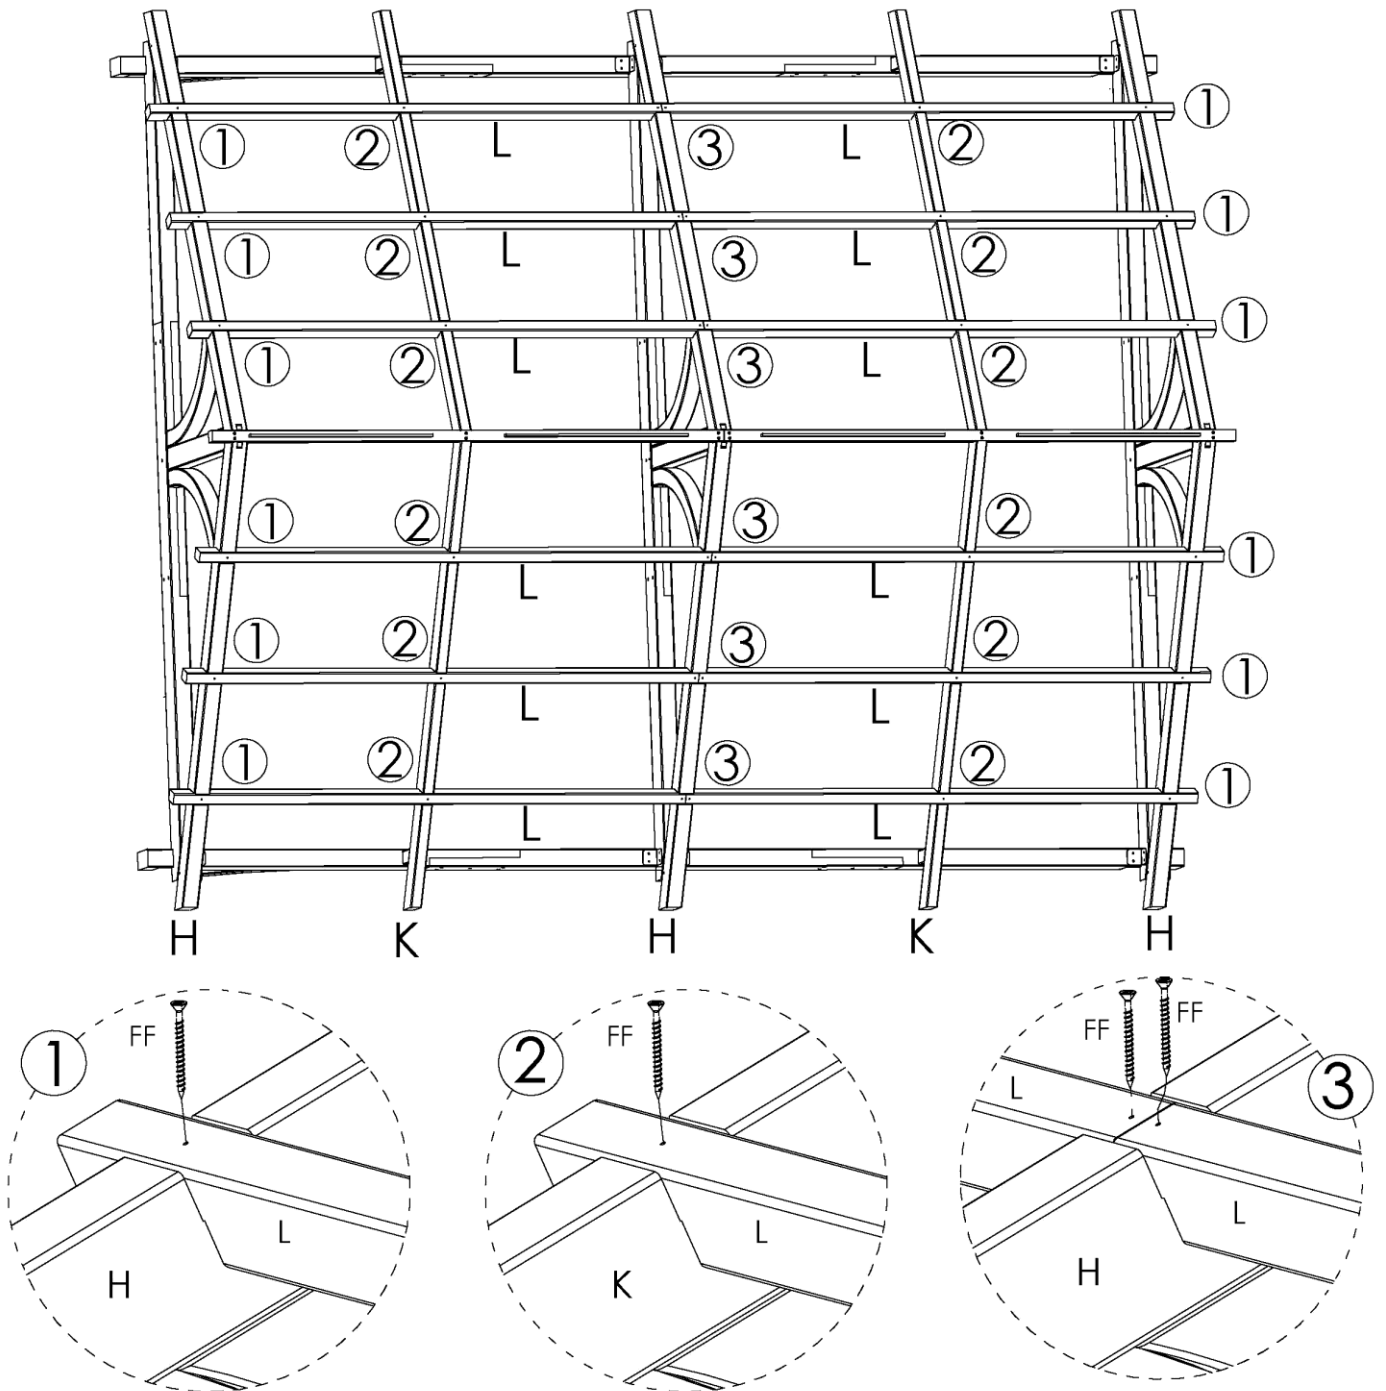


**Figure 14**

**Step 15:** Attach Roof Rafter (N) to Roof Support Rafter (L) and Roof Rafter (M) using Screws (FF). See Figure 15.1 and 15.2.

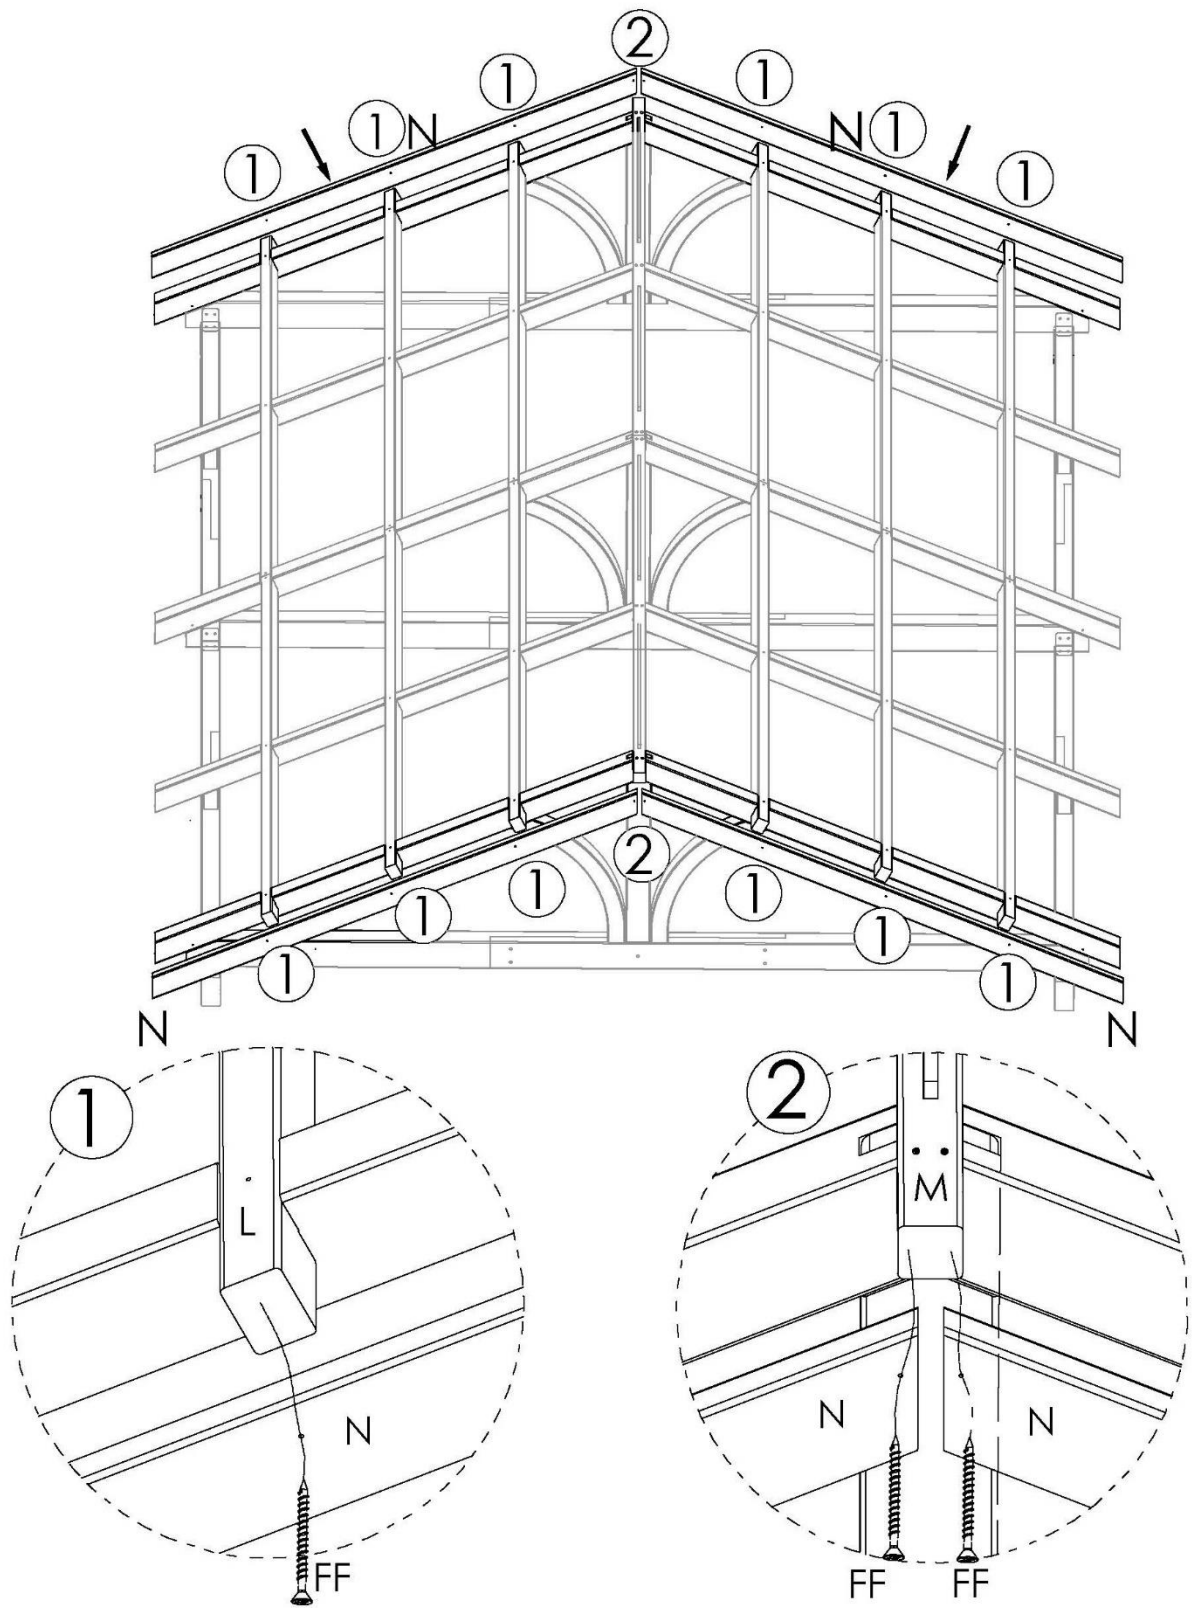

**Figure 15**


**Step 16:** Attach the Side Rafter (O1 and O2) to the Roof Rafters (H and K) using Screws (FF). See Figure 16.1 and 16.2

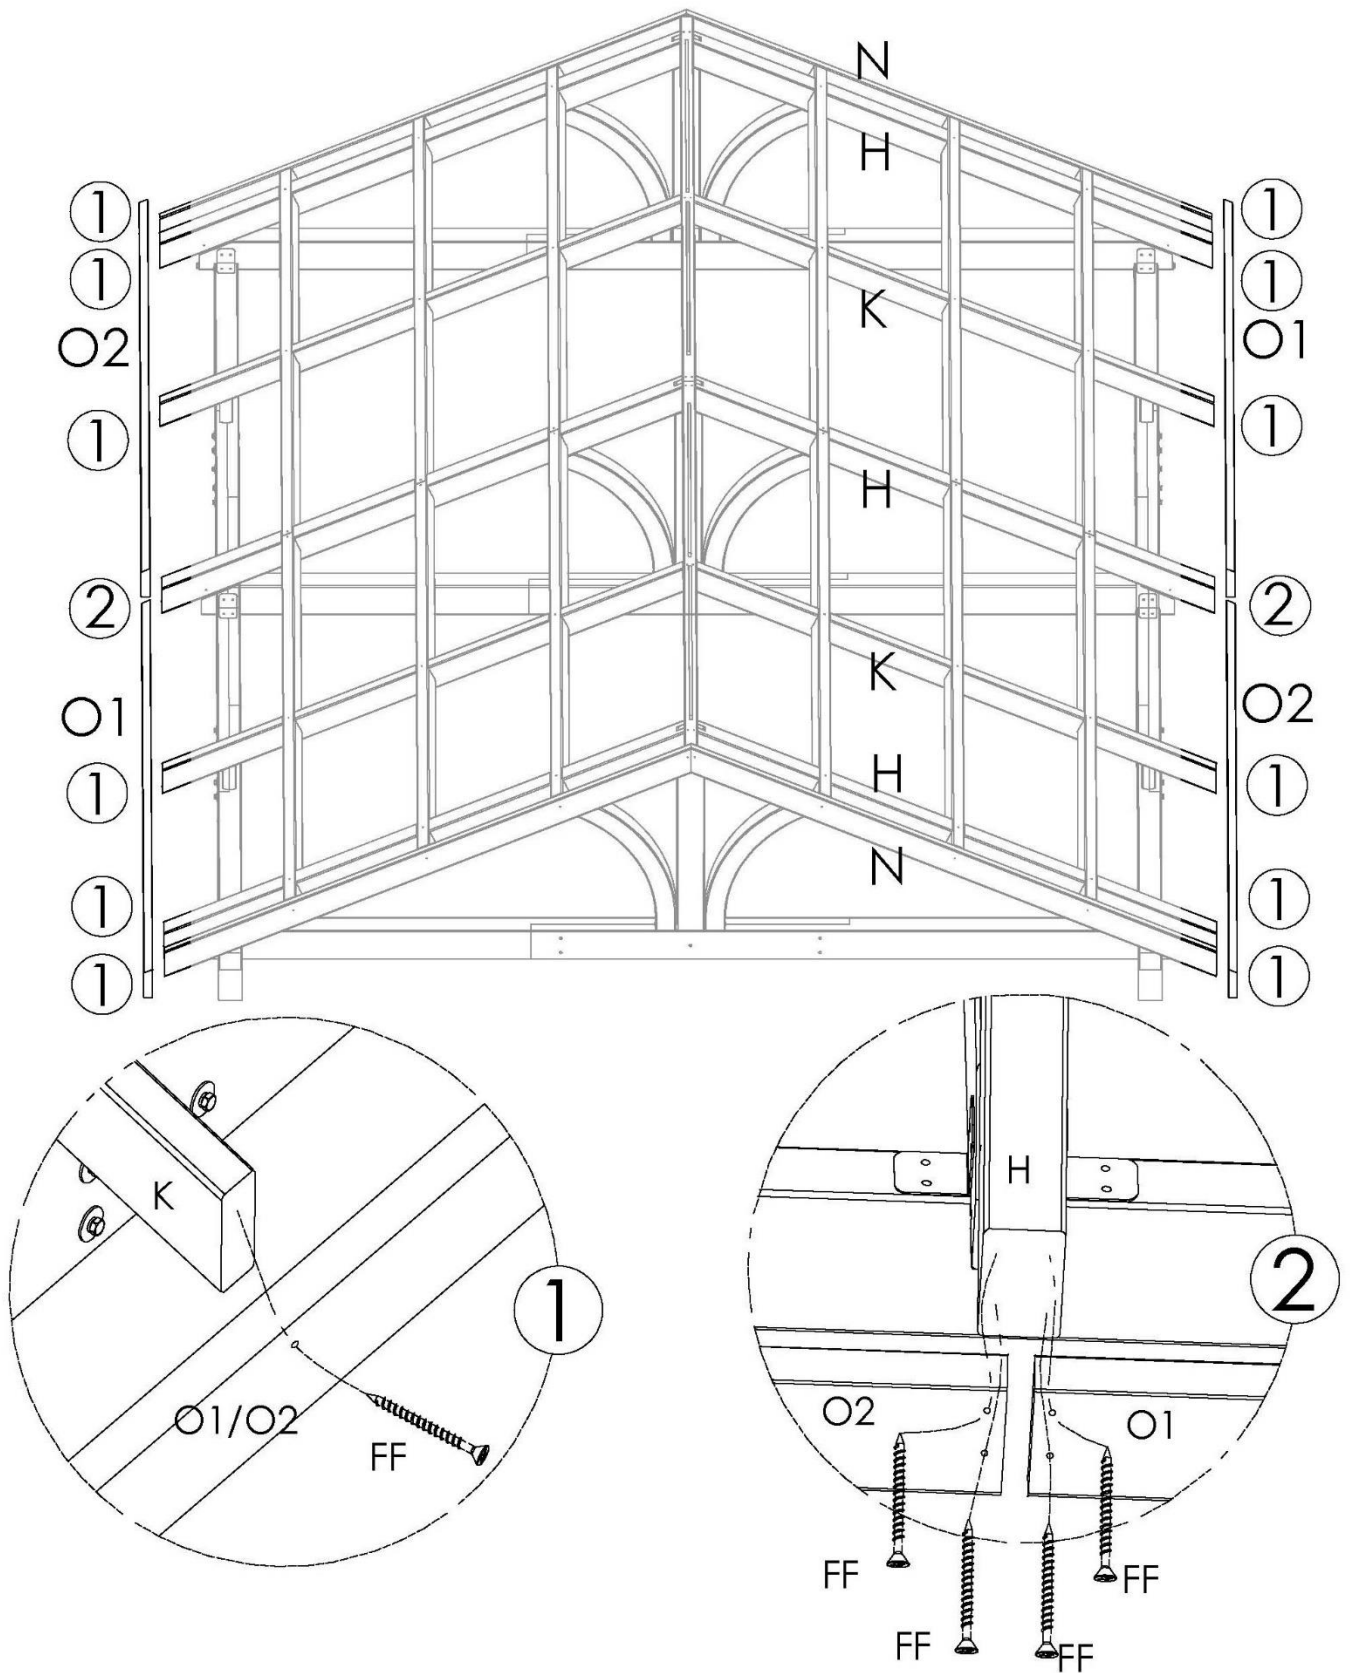

**Figure 16**

Note: See Figure 17.1 before screwing in Screws (HH).

**Step 17A:** Attach Roof Panel (P) to Roof Support Rafter (L) using Screws (HH) and washer (LL). See Figure 17.2. Repeat for opposite side.

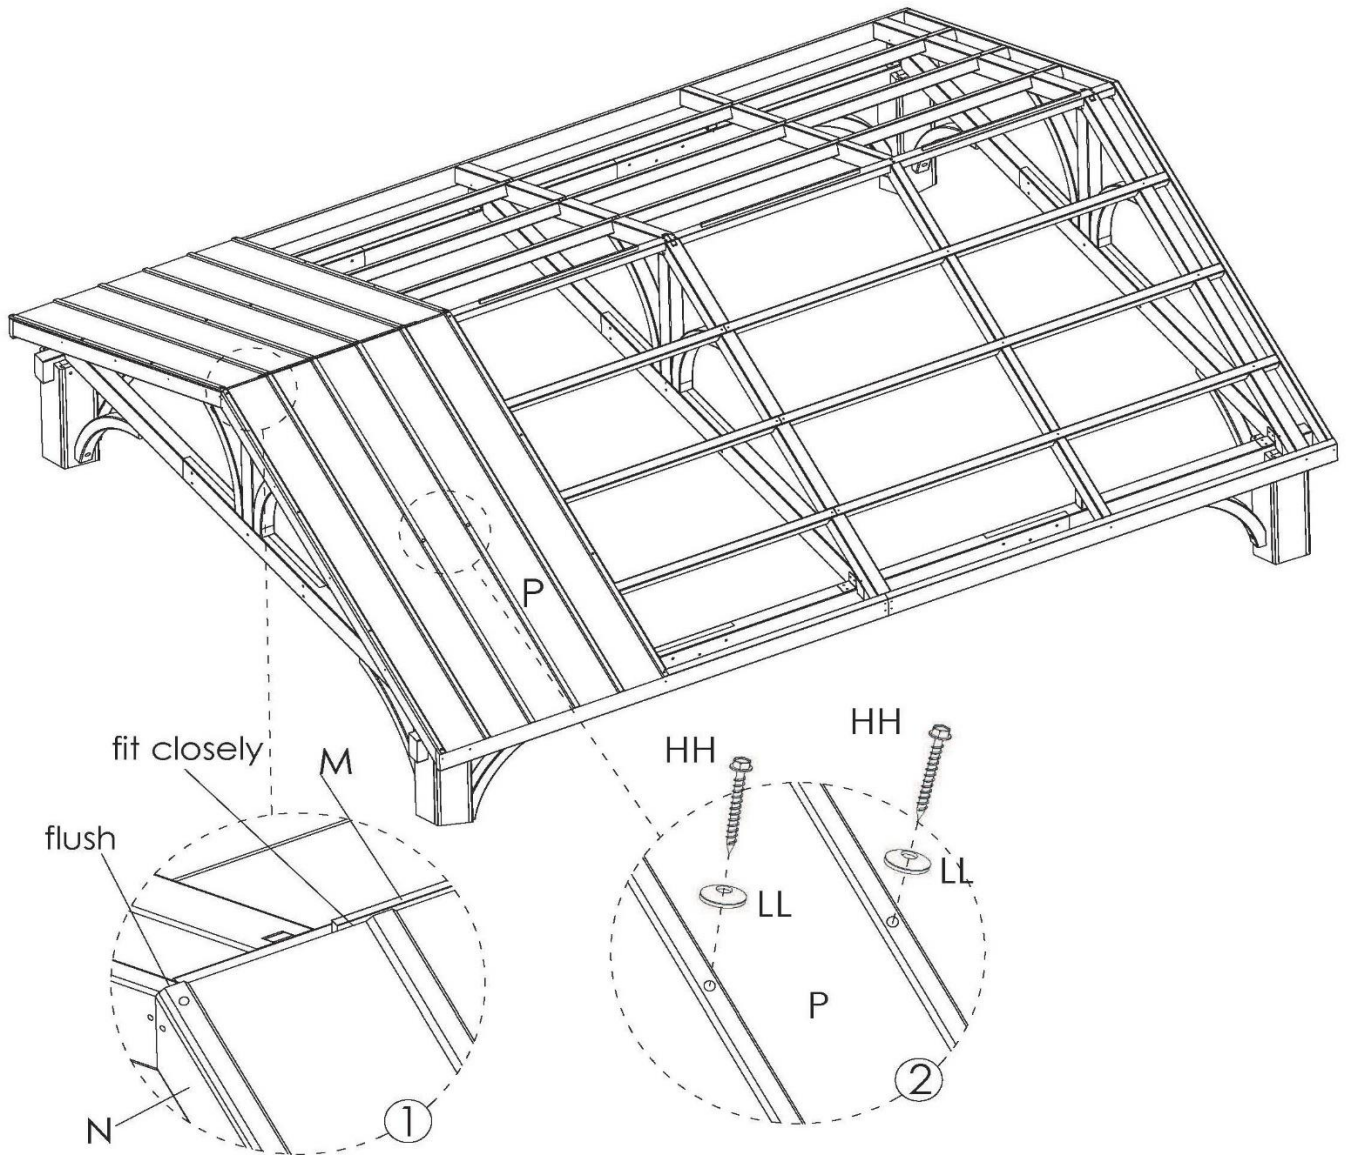


**Figure 17**



Note: Make sure the right panels overlaps the left panel.

**Step 18A:** Attach Roof Panel (P) to Roof Support Rafter (L) using Screws (HH) and washer (LL). See Figure 18.2. Repeat for opposite side.

**Step 18B:** Place the Roof Cap (R) on top of the Roof Panels (P) and attach using Screws (HH) and Washers (LL).

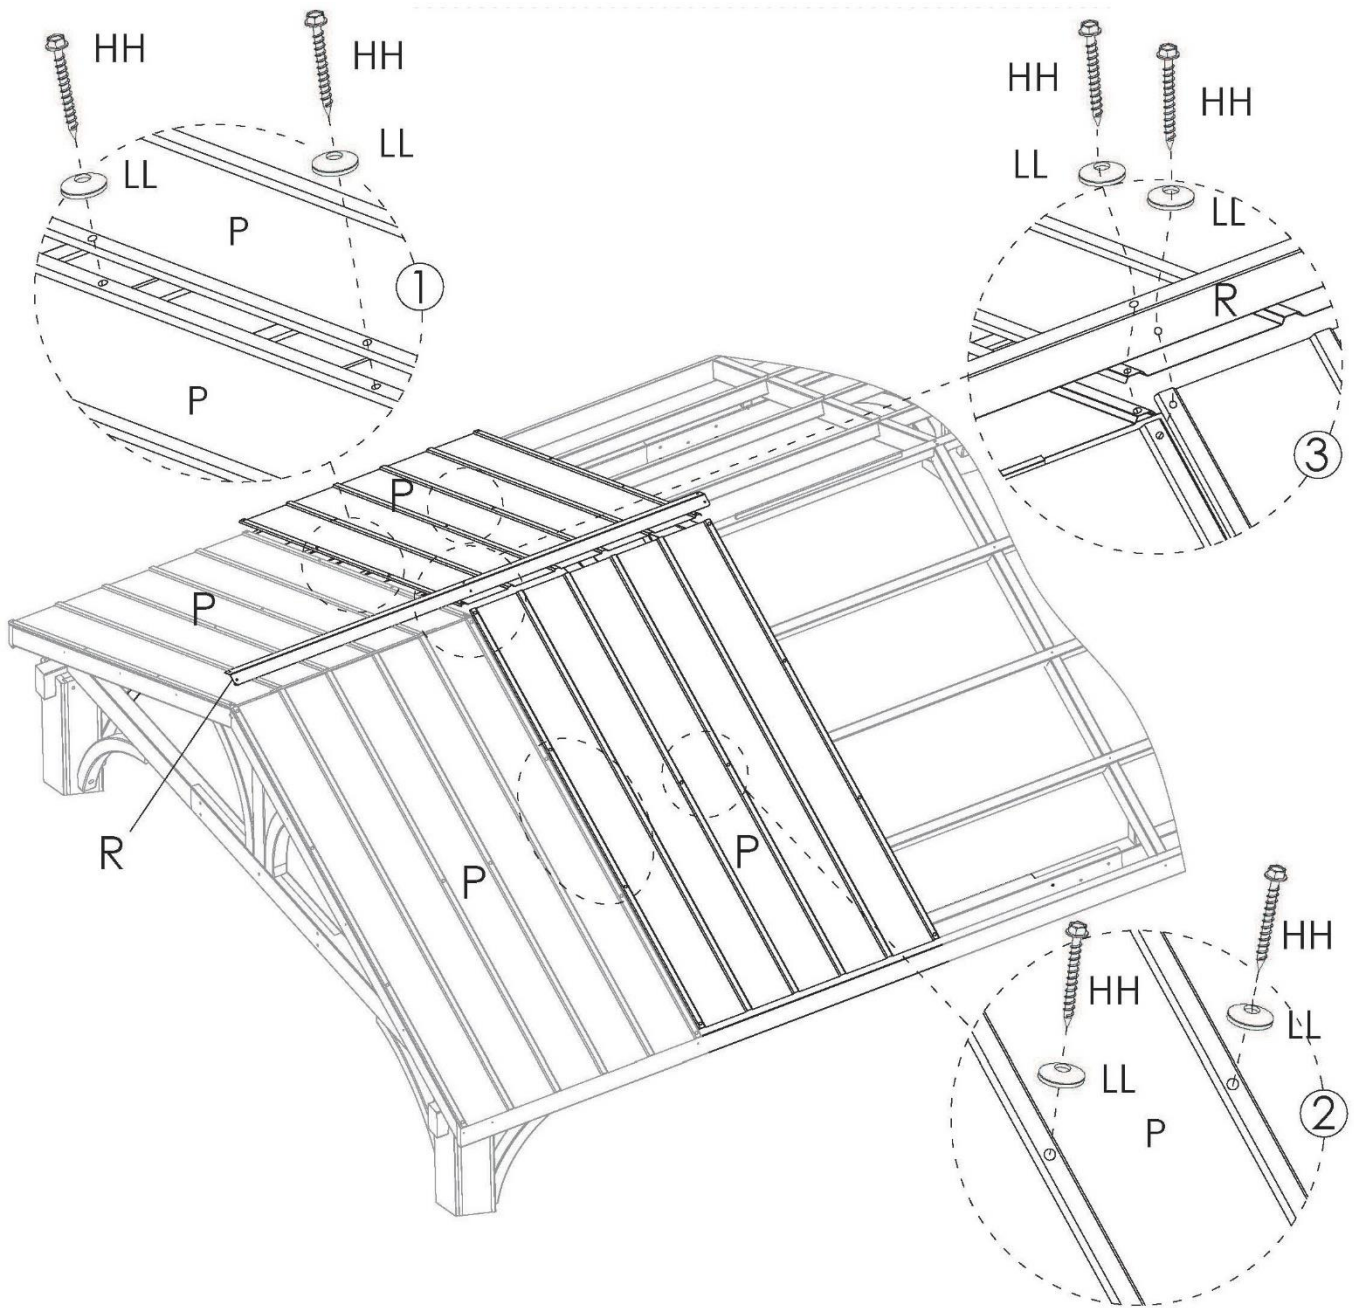


**Figure 18**

Note: Make sure the right panels overlaps the left panel.

**Step 19A:** Attach Roof Panel (P) to Roof Support Rafter (L) using Screws (HH) and washer (LL). See Figure 19.1 and 19.2. Repeat for opposite side.

**Step 19B:** Place the Roof Cap (R) on top of the Roof Panels (P) and attach using Screws (HH) and Washers (LL). See Figure 19.3

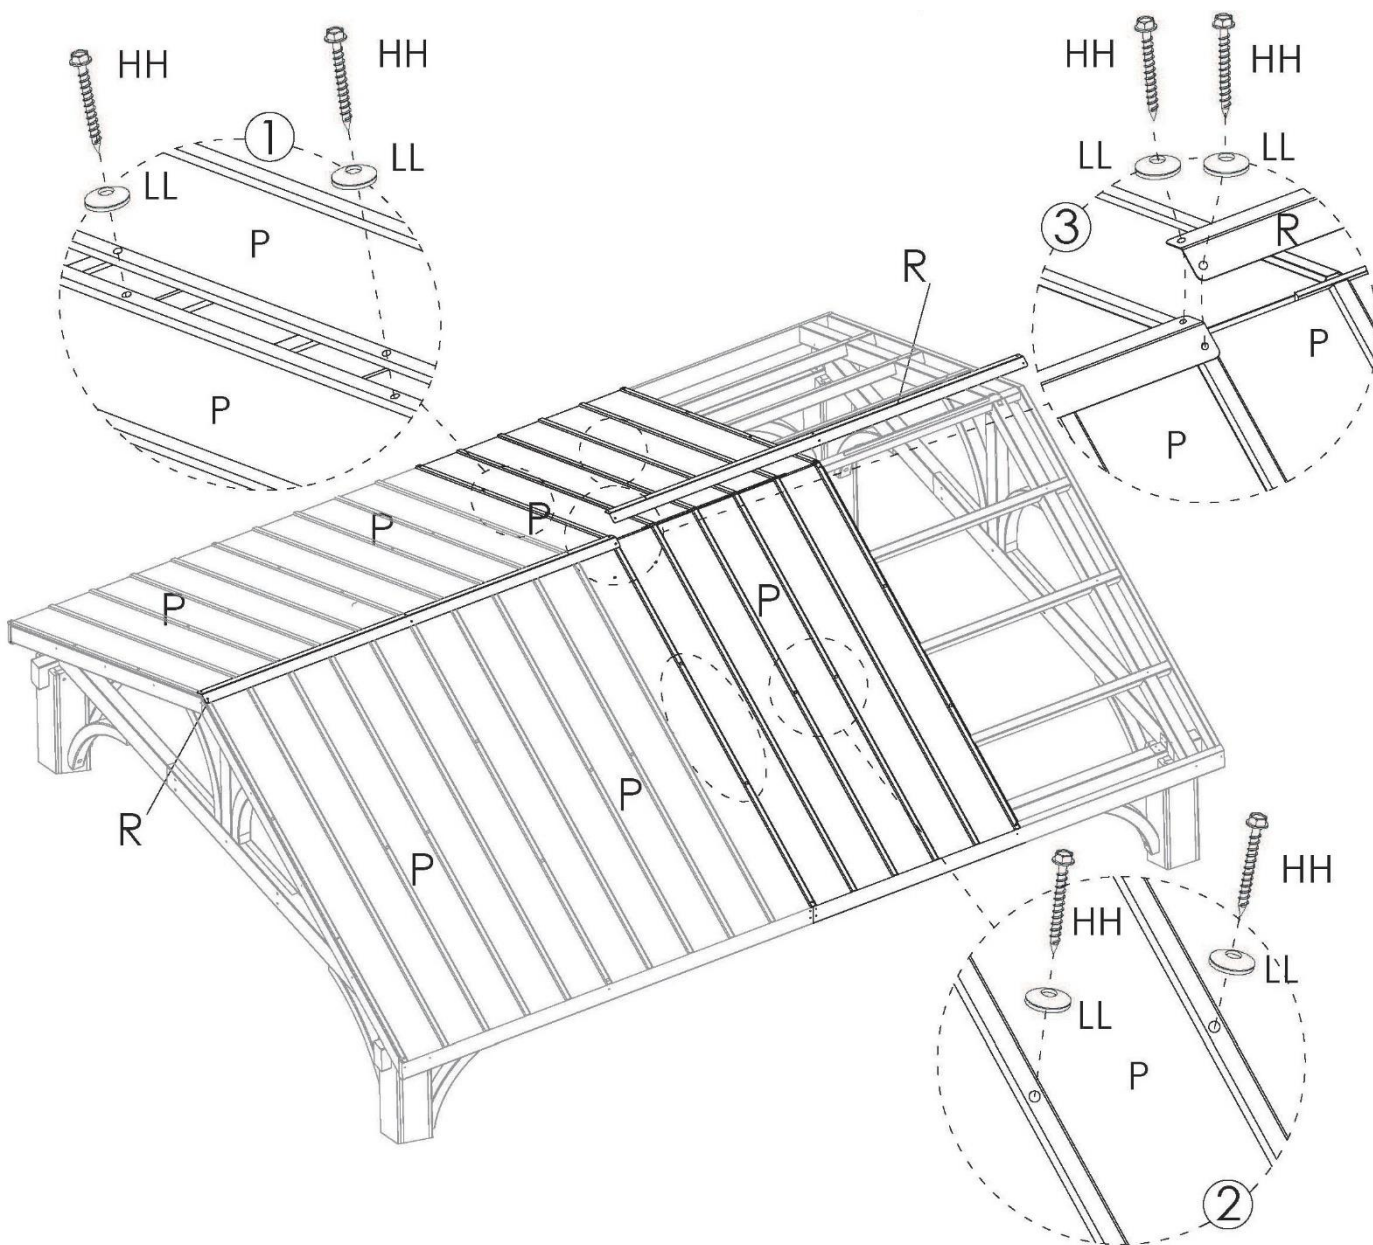


**Figure 19**

Note: Make sure the right panels overlaps the left panel.


**Step 20A:** Attach Roof Panel (P) to Roof Support Rafter (L) using Screws (HH) and washer (LL). See Figure 20.1 and 20.2. Repeat for opposite side.

**Step 20B:** Place the Roof Cap (R) on top of the Roof Panels (P) and attach using Screws (HH) and Washers (LL). See Figure 20.3

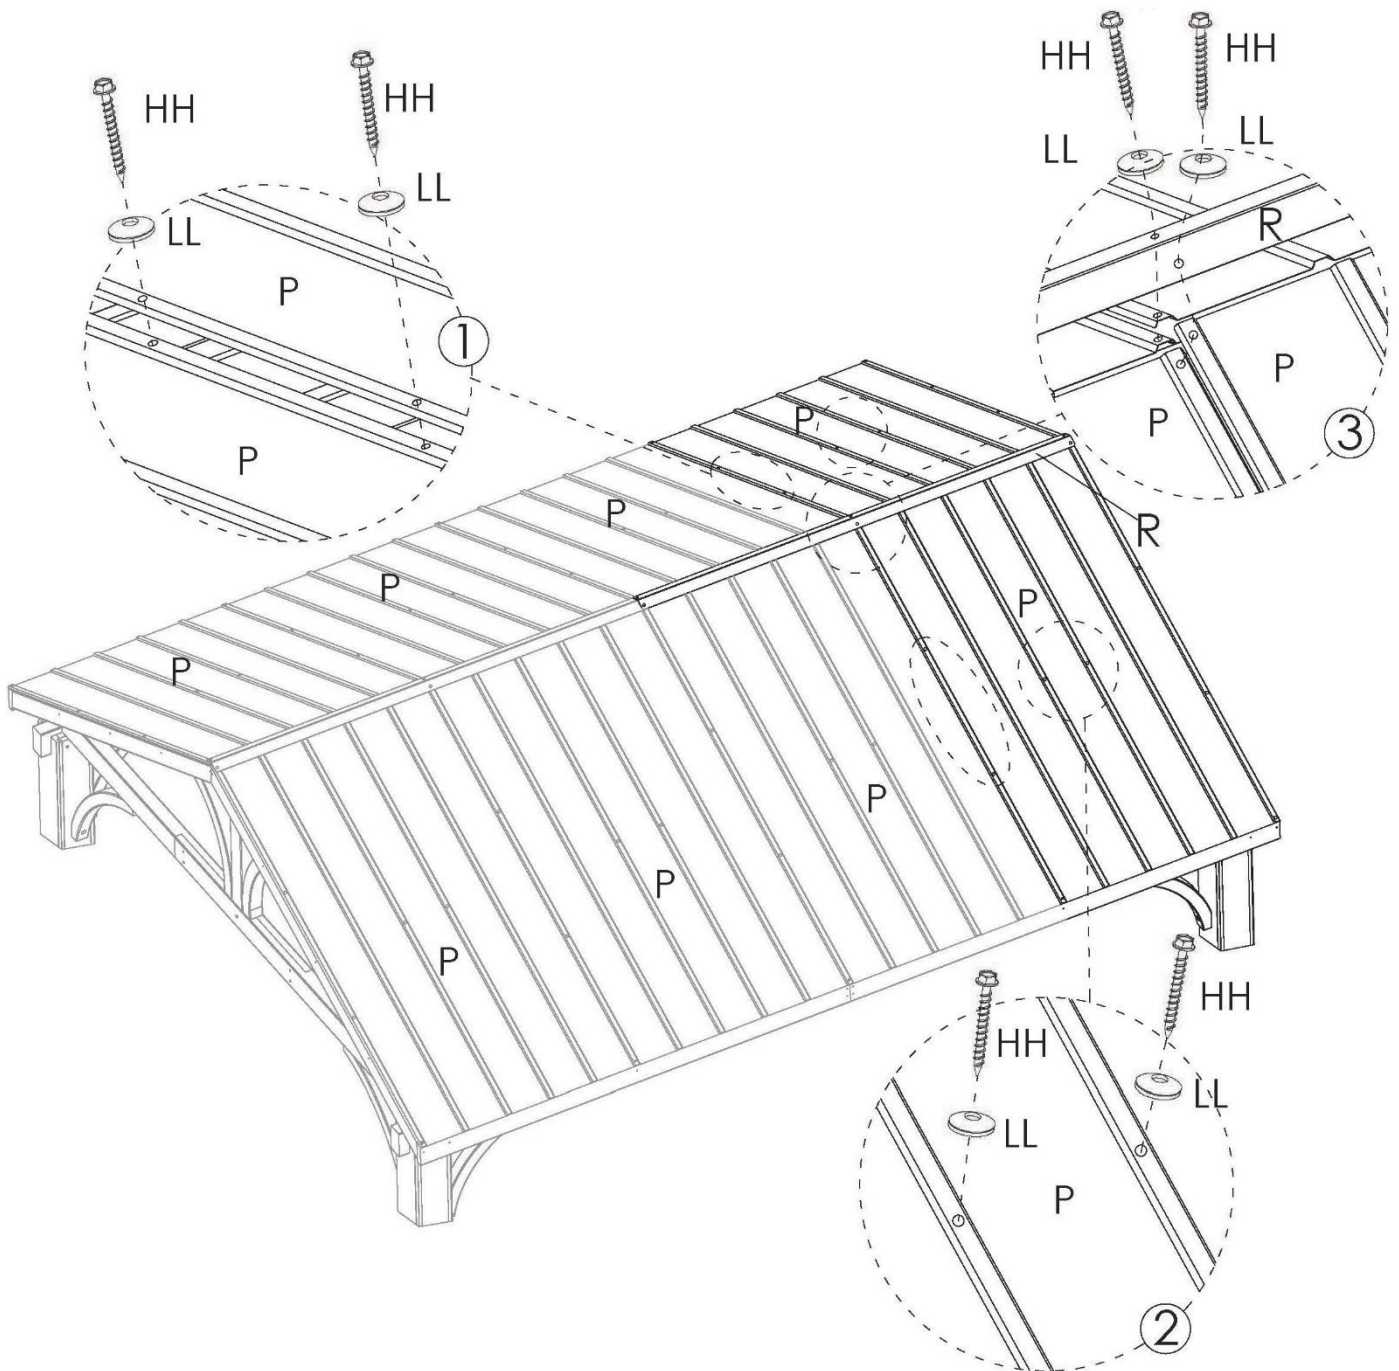


**Figure 20**

**Step 21:** Attach Roof Cap (R) and Roof Panel Trim (Q1 and Q2) to the sides of the Roof Frame using Screws (HH) and Washers (LL). See Figure 21.1 and 21.2  
Note: The Roof Panels (P1) must slide into the Roof Panel Trim (Q1 and Q2).  
Repeat for other side.

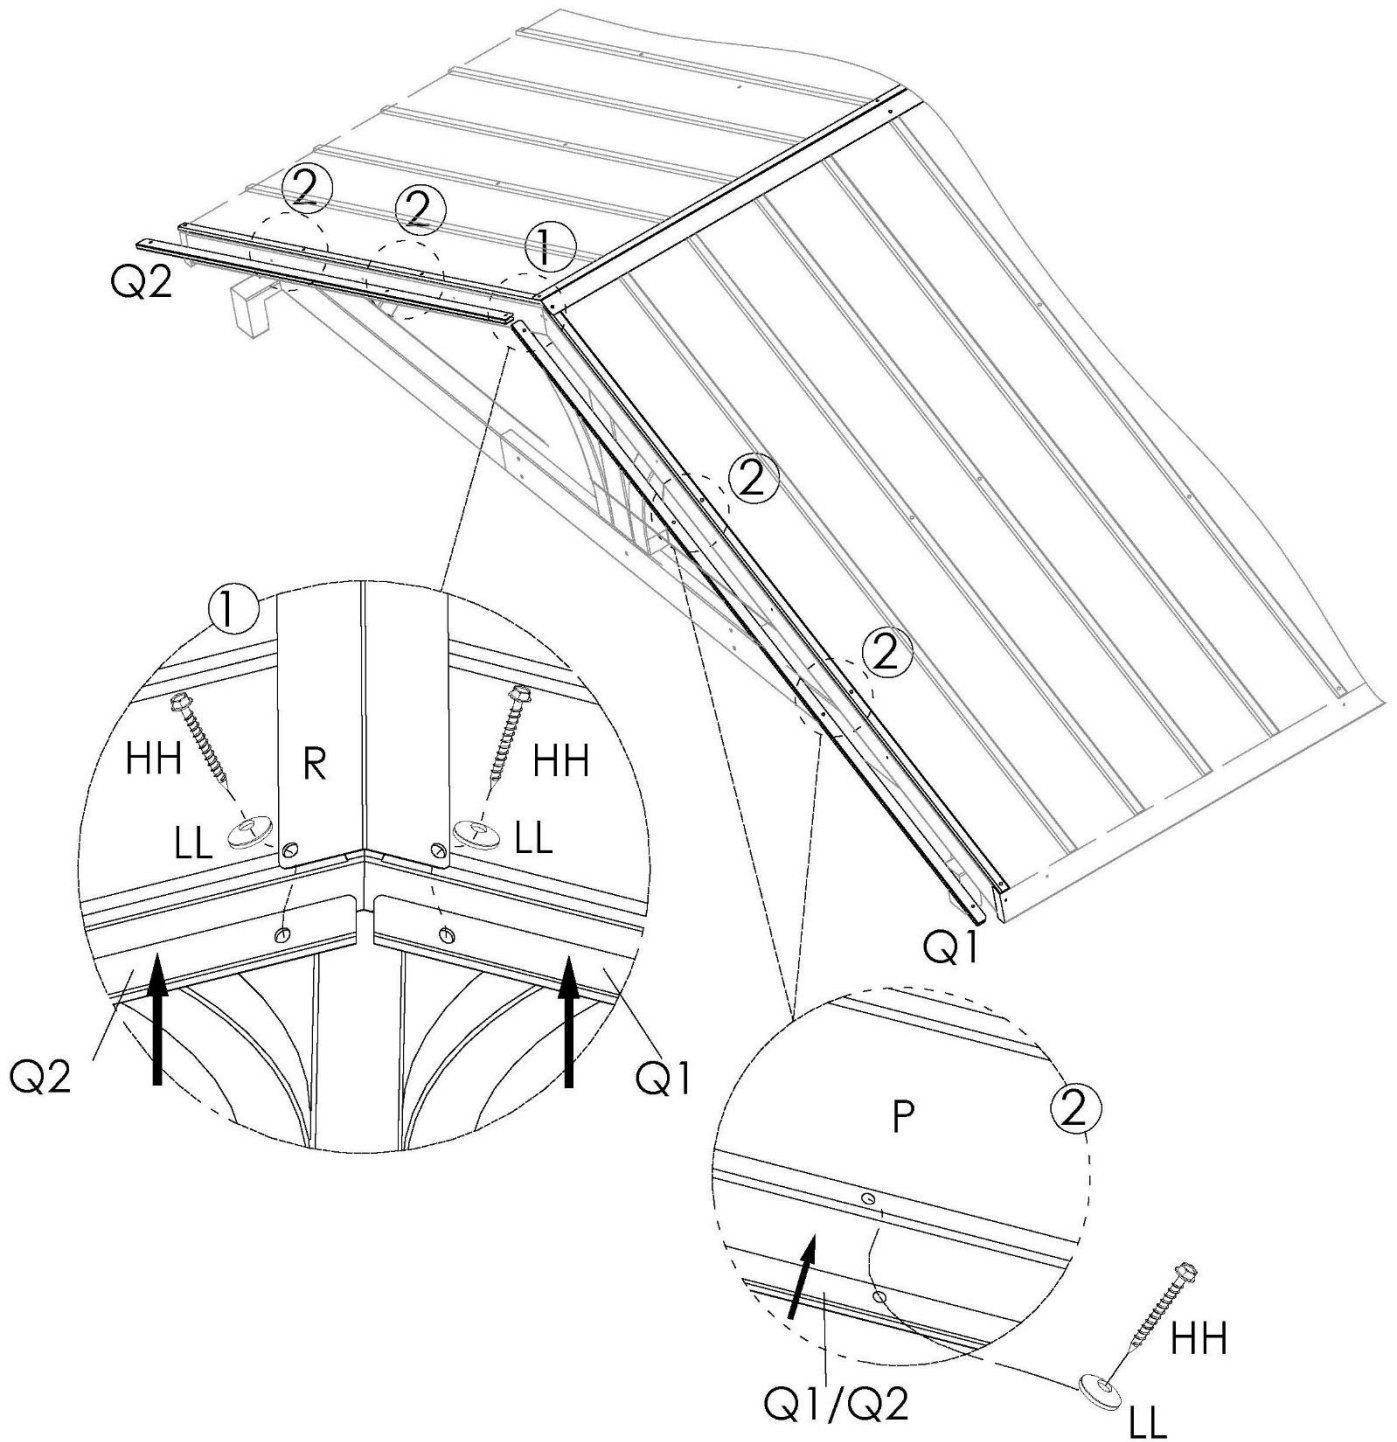

**Figure 21**


**Step 22:** Attach the Roof Plate (X) to Roof Rafter (N) using Screws (EE). See Figure 22

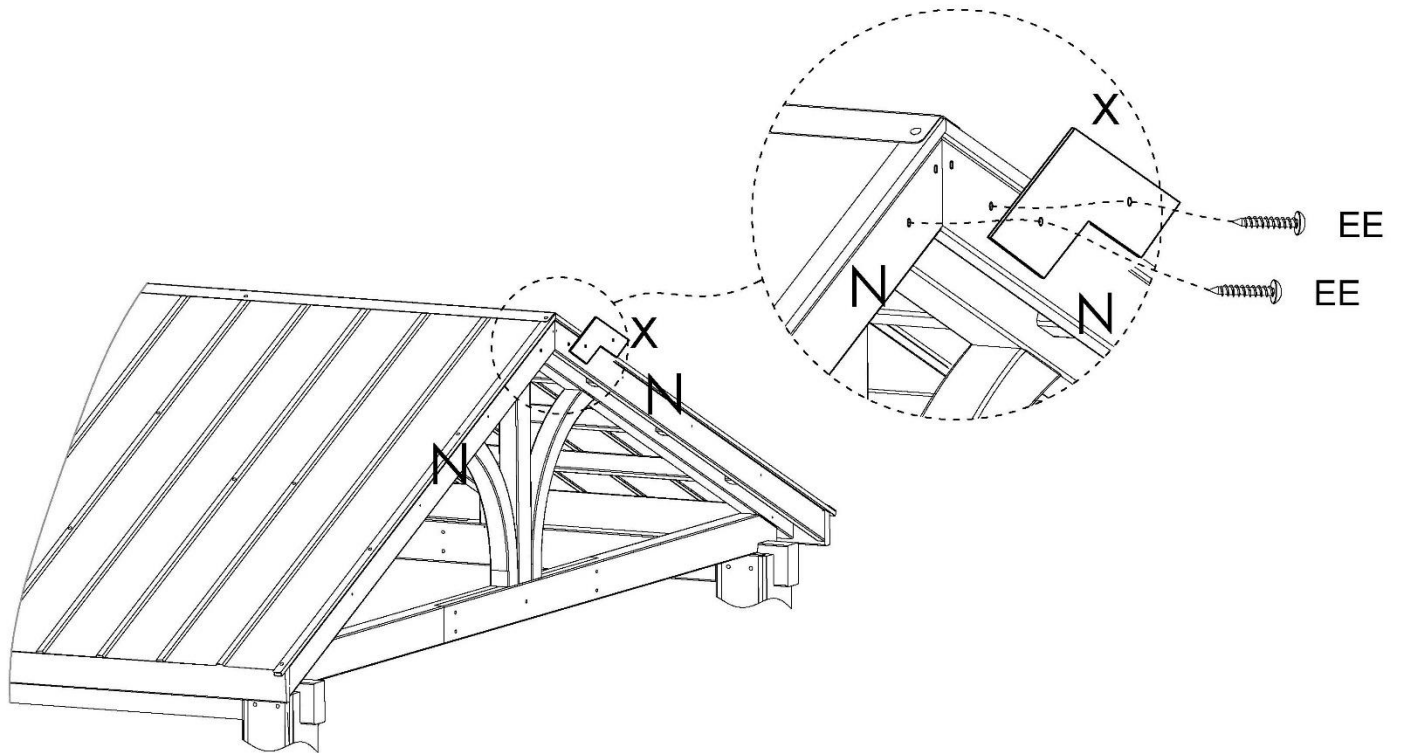

**Figure 22**


**Step 23A:** Attach Roof Panel Trim (S1 and S2) to the sides of the Roof Frame using Screws (HH) and Washers (LL). See Figure 23.1 and 23.2

**Step 23B:** Insert Roof Panel Trim (S1) into Roof Panel Trim (S2) and attach to Roof Frame using Screws (HH) and Washers (LL). See Figure 23.3  
Repeat for other side.

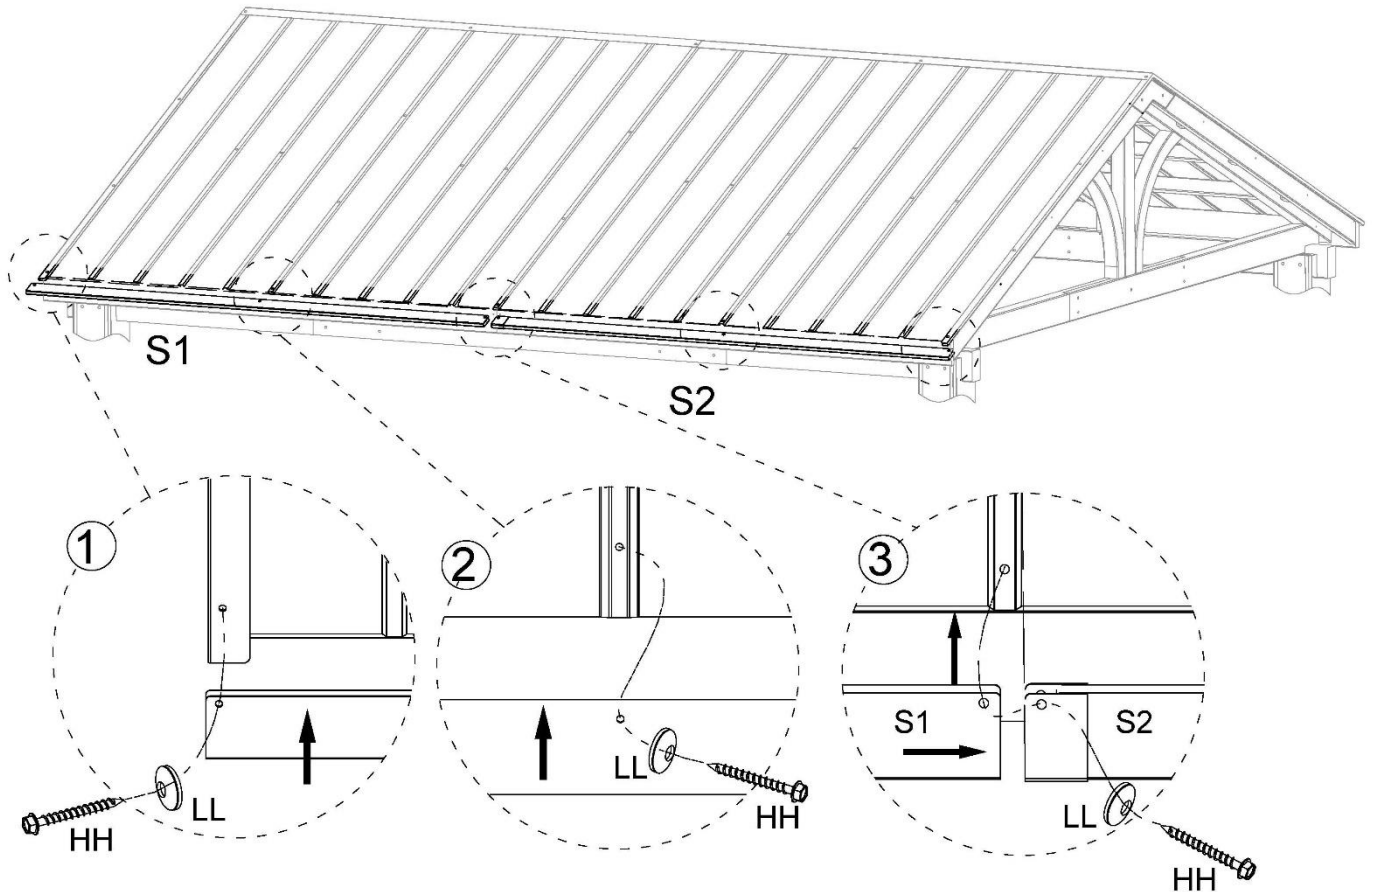

**Figure 23**

**Step 24:** Your Cedar Falls pavilion is complete and ready to use.

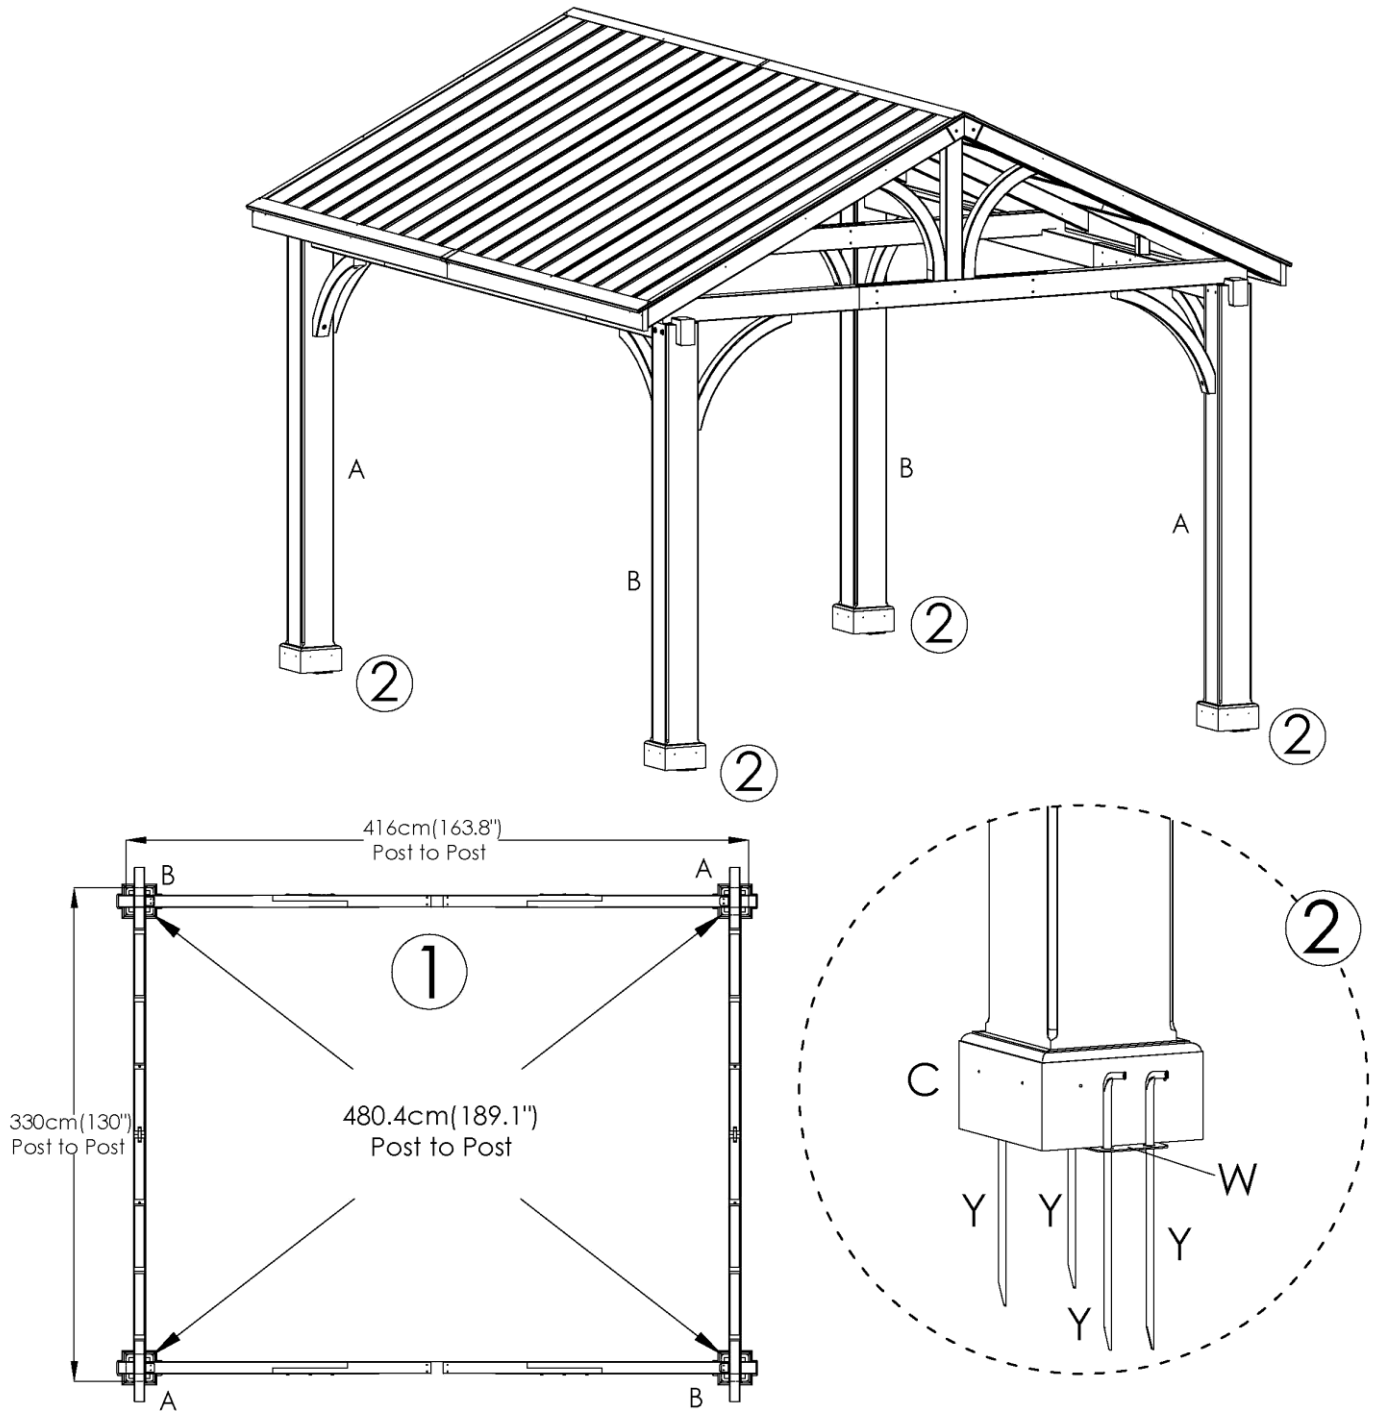

**Figure 24**

## **Care & Maintenance**

Maintenance is required for all outdoor gazebo/pergola/pavilion. Inspect hardware thoroughly before use and during the season to make sure bolts are securely fastened. Remove fabric canopy from soft top gazebo and store out of the elements when not in use or during hazardous weather conditions (wind, rain, snow, etc.). Remove all snow from hard top gazebo/pavilion. Failure to maintain the gazebo/pergola/pavilion will void warranty.

**Frame:** Clean frames with a mild soap and warm water. Do not use abrasive materials, cleaners or bleach. Rinse with clean water and dry thoroughly. Always clean, drain and dry thoroughly before storing for the winter.

**Fabric:** Clean fabric by hand with a mild solution of soap and water. Rinse thoroughly and allow to drip dry. Do not machine wash or tumble dry, as fabric may shrink. Do not use bleach or solvents on fabric.

## **Warranty & Liability**

1-year limited warranty; original receipt required to obtain warranty service.

### **What is not covered?**

**EXCLUSIONS:** Gazebos/Pergolas/Pavilions used for commercial, contract, or other non-residential purposes. Damage due to acts of nature, vandalism, misuse, improper assembly or maintenance, collapse, settling of ground or base structure. Discoloration, fading, mildew, corrosion or rusting.

**LIMITED WARRANTY:** The manufacturer will replace any part found to be defective in material or workmanship within 30 days of purchase date. The purchaser must contact the manufacturer's customer service department. After 30 days of purchase date the warranty is limited. The manufacturer, at its option, will repair or replace the defective parts. Proof of purchase (dated register receipt) and photos are required for all warranty claims. It remains the customer's responsibility to pay for freight and packaging charges to and from the service center. Warranty is to the original purchaser and is non-transferable. Any replacement or warranted items will be in the original style and color, or similar style and color if the original is unavailable or has been discontinued.

**LIMITED LIABILITY:** Inside Out Int'l., LLC. maximum liability shall not exceed the retail purchase price of the product in regard to defective product and any incidental/punitive claims or damages.

Please contact our Customer Service for assembly assistance or missing/damaged parts. Do not return to the store without authorization.

## **Accessories**

Privacy Curtains, Winter Covers, Winter Support Poles, and Replacement Mosquito Netting are available for select items. Please visit your retailer's website or contact [service@shadenshelters.com](mailto:service@shadenshelters.com) for more information.

## **Customer Service Contact Information**

Hours: Monday - Friday 8:00 a.m. - 5:00 p.m. Central Time (CT)

Phone: 1-888-607-4417

Email: [service@shadenshelters.com](mailto:service@shadenshelters.com)