

# SILI®

## SILIDRIFT™

### DRIFTING GOKART ATTACHMENT

# SILI®



## INSTRUCTION MANUAL

## CONTENT

S/N	CONTENT	PAGE NUMBER
1	CONSUMABLES / REPLACEMENT PARTS	2
2	SAFETY	2
3	BOX CONTENT	3
4	COMPONENTS	4
5	ASSEMBLY GUIDE	5 - 8
6	HOW TO USE THE SILI GOKART ATTACHMENT	9

## 1 CONSUMABLES / REPLACEMENT PARTS



Please purchase replacement parts from: [www.sili.io](http://www.sili.io)

## 2 SAFETY

- Total Item Weight 8kg. Maximum user weight 100kg.
- Recommended for ages 8 years and over. Not suitable for children under 3 years old.
- Only for domestic use.
- To be used under the direct supervision of an adult.
- Protective equipment (helmet, knee pads and elbow pads) should be worn, not to be used in traffic.

## 3 BOX CONTENT


NUMBER	ITEM	QUANTITY
1	10MM HEX KEY	1
2	8MM HEX KEY	1
3	5MM HEX KEY	2
4	4MM HEX KEY	1
5	THREADLOCK	1
6	13MM/17MM SPANNER	1
7	17MM SPANNER	1
8	M6x40 HEX SCREW	2
9	M6 NUTS	2
10	M8 NYLOC NUT	6
11	TYPE B STRAP	2
12	SUSPENSION STRUT	2
13	M10 NYLOCK NUT	1
14	M10X65 HEX SCREW	1
15	SOCKET HEX SCREW	2
16	M6x12 DOMED SCREW	2
17	ADJUSTMENT KNOB	1
18	FOAM PROTECTOR PAD	2
19	M5 SEAT SCREW	4
20	M6 FLAT PENNY WASHER	4
21	M8x40 HEX SCREW	2
22	M8x30 HEX SCREW	2
23	HANDLE GRIP KIT	1
24	FRONT T BAR	1
25	ADJUSTMENT SLIDER	4
26	WHEEL	2
27	REAR T BAR	1
28	REAR SWING ARM	1
29	SPRUNG MOUNTS	2
30	REAR T STRUT MOUNT	1
31	RIGHT ARM	1
32	LEFT ARM	1

## 4 COMPONENTS



## 5 ASSEMBLY GUIDE


- 1** Connect the suspension strut to the rear T strut mount, with the M6 nut. Tighten securely with the 13mm/17mm spanner provided.

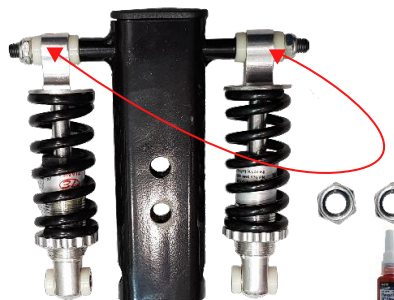


- 2** Connect the rear T bar to the rear T strut mount, with the M8 \* 40 Screw, use the smaller hex key to tighten.



- 3** Attach the wheel to the rear swing arm.

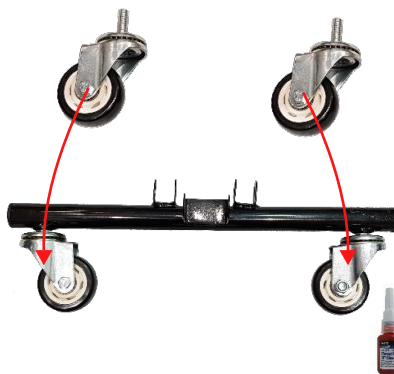

- 4** Connect the upward extruding part of the repeat swing arm to the already assembled parts as in the diagram above, using the M10 \* 65 hex screw and the M8 nyloc nut

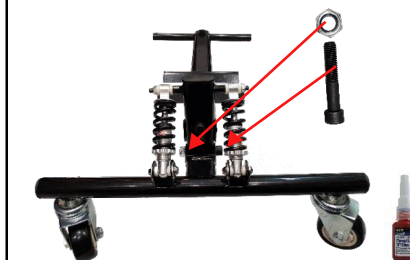


- ⓐ tighten securely with the 8mm hex key and spanner provided.

## 5 ASSEMBLY GUIDE

- 5** Connect the suspension strut to the rear swing arm using the M6 flat penny washer, M6\*12 domed screw and socket hex screw, tighten securely with the smaller hex key.




- 6** Properly align the hole in the sprung mount to the rear T bar and insert the M6\*40 hex screw loosely as we will be connecting the arms here later.

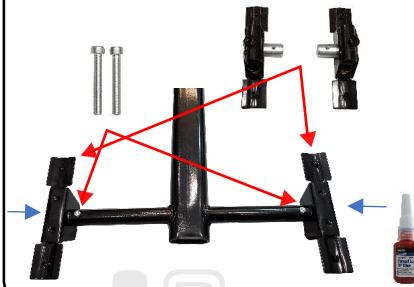

- 7** Connect the right arm to the sprung mount using the M8\*30 hex screw, use the smaller hex key to tighten.



- 8** Repeat step 7 in the left side using the left arm.

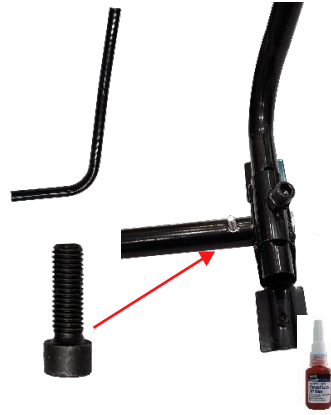

## 5 ASSEMBLY GUIDE

- 9** Secure the screw with the nut, using the spanner provided.



- 10** Connect the adjustment slider to the sprung mount, now secure it tightly with the M6 nuts.



- 11** Attach the adjustment knob as in the diagram.





## 5 ASSEMBLY GUIDE


- 12** Now, properly assemble the components of the handle grip kit, as in the diagram and connect it to the arms.



- 13** Position the seat over the frame and align with the holes in the frame, insert the M5 seat screws and tighten securely.




- 14** We recommend using the thread locker provided, as the screws and nuts can become loose overtime with the vibration. Regularly check and tighten screws and nuts,

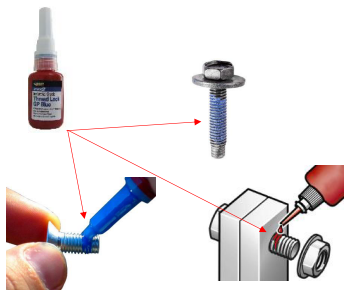

⑧ Check pre-assembled nuts and screws as these have been found to be loose. It is the buyer's responsibility to check that they are all secure before using the gokart.

## 6 HOW TO USE THE SILI GOKART ATTACHMENT

- 1** ADJUSTMENT

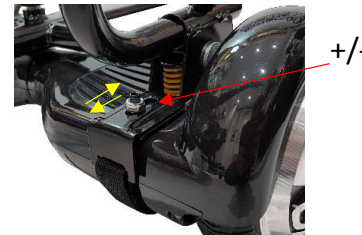

- 9** FITMENT

