

# SPIKA NG 230

115 V / 60 Hz

## SELF-CONTAINED ICE CUBE MACHINE

**WARRANTY:**  
**ICE MAKERS - 3 YEARS PARTS AND LABOR**  
**EVAPORATOR - 5 YEARS PARTS AND LABOR**  
**COMPRESSOR - 5 YEARS PARTS**

### FEATURES

- ▶ PRODUCES FULL DICE ICE CUBES OR HALF DICE ICE CUBES.
- ▶ STIF: STRONG INOX FRAME. SOLID MACHINE STRUCTURE IN 4 COLUMNS WITH AISI 304 STAINLESS STEEL FRAME.
- ▶ STRONGEST DOOR IN THE MARKET. MADE OF STAINLESS STEEL. OPENING AND DAMPING SYSTEM PATENTED BY ITV.
- ▶ SMART FRONT VENTILATION SYSTEM, (SFVS) ALLOWS BUILT-IN INSTALLATION OF THE UNIT.
- ▶ CLEANING SWITCH: ALLOWS CIRCULATION OF WATER WITH DESCALING PRODUCT (CALKIN OR SIMILAR) WITHOUT COOLING.
- ▶ "NEVER STOP" MOTOR PUMP DEVELOPED BY ITV. PUMP WITHOUT SEALS, WHICH AVOIDS DETERIORATION IN HARD WATER.
- ▶ EASI: EASY ACCESS FOR SERVICE & INSTALLATION. ALL PANELS CAN BE DISASSEMBLED SEPARATELY.
- ▶ ELECTRONIC CONTROL THAT ENHANCES THE PERFORMANCE OF THE MACHINE AND ALLOWS IT TO ADAPT TO EXTREME CLIMATES.
- ▶ NATURAL GAS R290 WITH VERY LOW GLOBAL WARMING POTENTIAL WHICH ALSO REDUCES THE ENERGY CONSUMPTION.
- ▶ LED ON/OFF SWITCH / PCB MOUNTED AT THE BOTTOM.
- ▶ TROPICALIZED MACHINES (T CLASS) / STAINLESS STEEL ADJUSTABLE LEGS.



	 24 H	 70°F/20°C   50°F/10°C lbs (Kg)	 90°F/32°C   70°F/21°C lbs (Kg)	 lbs (Kg)	 in (mm)	 in (mm)	 <b>SPIKA HALF DICE</b> 0.9" (W) x 0.43" (D) x 1.02" (H) 23 mm (W) x 11 mm (D) x 26 mm (H) Average dimensions
SPIKA NG 230 A		<b>223</b> (101)	<b>157</b> (71)	<b>77</b> (35)	Width <b>25.99"</b> (660) Depth <b>27.56"</b> (700) Height* <b>32.76"</b> (832)	Width <b>29.14"</b> (740) Depth <b>28.35"</b> (720) Height <b>37.6"</b> (955)	 <b>SPIKA FULL DICE</b> 1.02" (W) x 0.9" (D) x 1.02" (H) 26 mm (W) x 23 mm (D) x 26 mm (H) Average dimensions
SPIKA NG 230 W		-	-				

\* WITH LEGS 39"

### ACCESSORIES

#### INCLUDED



10" FILTER  
 ANTI-LIMESCALE + ANTI-CHLORINE  
**PRO-101 K**  
 #33738



10" REPLACEMENT CARTRIDGE  
 ANTI-LIMESCALE + ANTI-CHLORINE  
**PRO-10**  
 #33742




SCALE KLEEN  
 #4033



ONE FOOT PAD  
 ITEM #4144

# TECHNICAL SCHEME

SPIKA NG 230

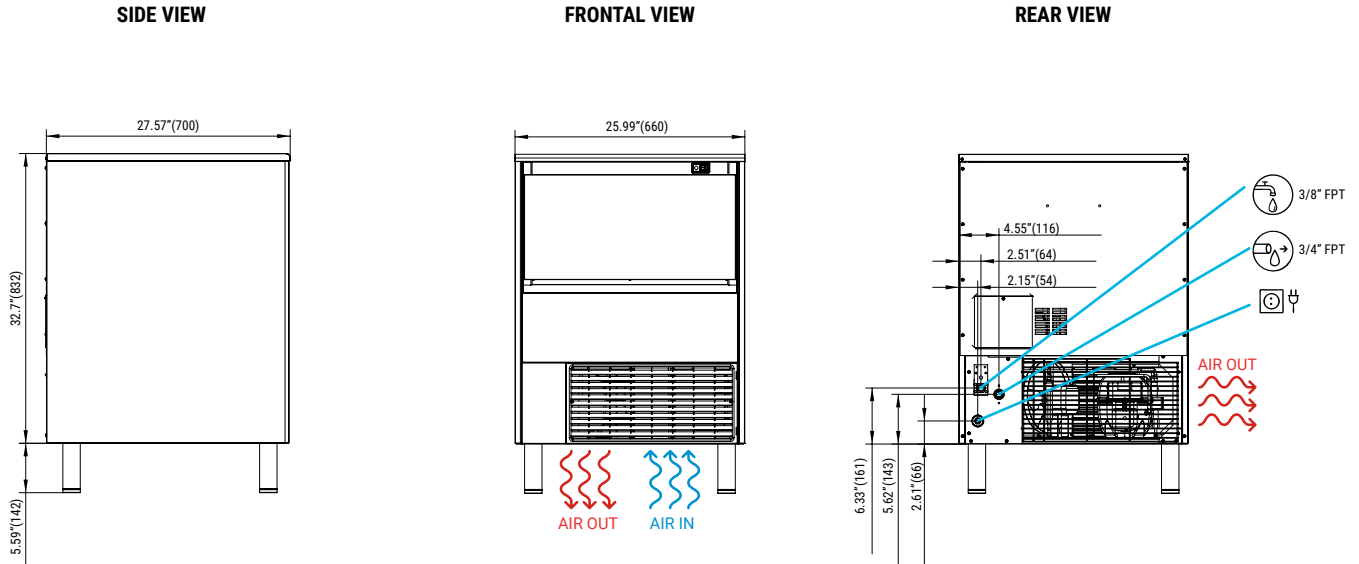

\* All dimensions in inches (and mm)

## OPERATING CONDITIONS

### PRODUCTION (LBS) 60Hz


±10% V

41°F/109°F

41°F/95°F

14,5 psi (1 bar) / 87 psi (6 bar)

120/240 Ice cubes/cycle



V	Hz	ph
115	60	1N

FULL DICE SPIKA NG 230 AIR COOLED

	50° 10°	60° 15°	70° 21°	86° 30°
50° 10°	229	209	192	179
68° 20°	225	203	185	168
90° 32°	189	168	157	134
109° 43°	159	137	115	93

FULL DICE SPIKA NG 230 WATER COOLED

	50° 10°	60° 15°	70° 21°	86° 30°
50° 10°	-	-	-	-
68° 21°	-	-	-	-
90° 32°	-	-	-	-
109° 43°	-	-	-	-

## MODELS

SPIKA NG 230 A

SPIKA NG 230 W

	ASHRAE CONDITIONS (BTU/h) (W)	(W) 109°F	(AWG/mm <sup>2</sup> ) (n.)	FUSE	100lbs 90°F / 70°F (Kwh/100 lbs)	gal 100lbs (l/h)	HEAT REJECTED (BTU/h) (W)	(lbs)	(lbs)
SPIKA NG 230 A	4,087 1,197	414	16/1.5 3	16	5.9	26.3 7.7	2,806 822	141	167,5
SPIKA NG 230 W	-	-	-	-	-	-	-	-	-



ITV Ice Makers, Inc.  
 9550 Satellite Blvd, Suite 100  
 Orlando, FL 32837  
 Phone: 1 407 826 1860 | Fax: 1 407 826 1861  
 Toll Free: 1 888 488 1423  
 sales@itvice.com | www.itvice.com

SERVICE  
 service@itvice.com  
 Skype: service@itvice.com  
 PHONE: +1 888 488 1423  
 FROM 8AM TO 5PM EST

**WARRANTY:**  
 ICE MAKERS - 3 YEARS PARTS AND LABOR  
 EVAPORATOR - 5 YEARS PARTS AND LABOR  
 COMPRESSOR - 5 YEARS PARTS

