

SLIDE RAIL COUPLING SRC-4

To be used with
4BSE series pumps



LOCATION

This SRC-4 is designed for wet wells, tanks, or lift stations where it is necessary to remove a pump from service and reinstall the pump without maintenance personnel entering the pit to unbolt the pump flanges.

STATIONARY ELBOW

Cast iron ASTM A-48 class 30

MOVABLE FITTING

Ductile iron ASTM A-536

GUIDE RAIL CAP

Bracket: 304 stainless steel

Plugs: ductile iron ASTM A-536-84

HARDWARE

304 series stainless steel

O-RINGS


Buna-N, 70 ±5 Duro.

GASKETS

Rubber





PAINT

Air dry enamel, water based.

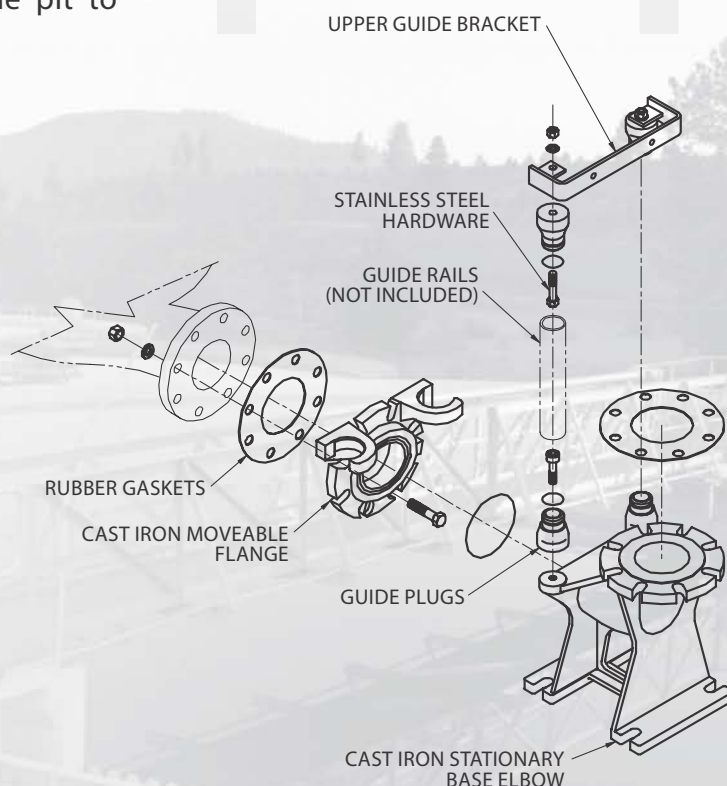

inches
(mm)

SPECIFICATIONS

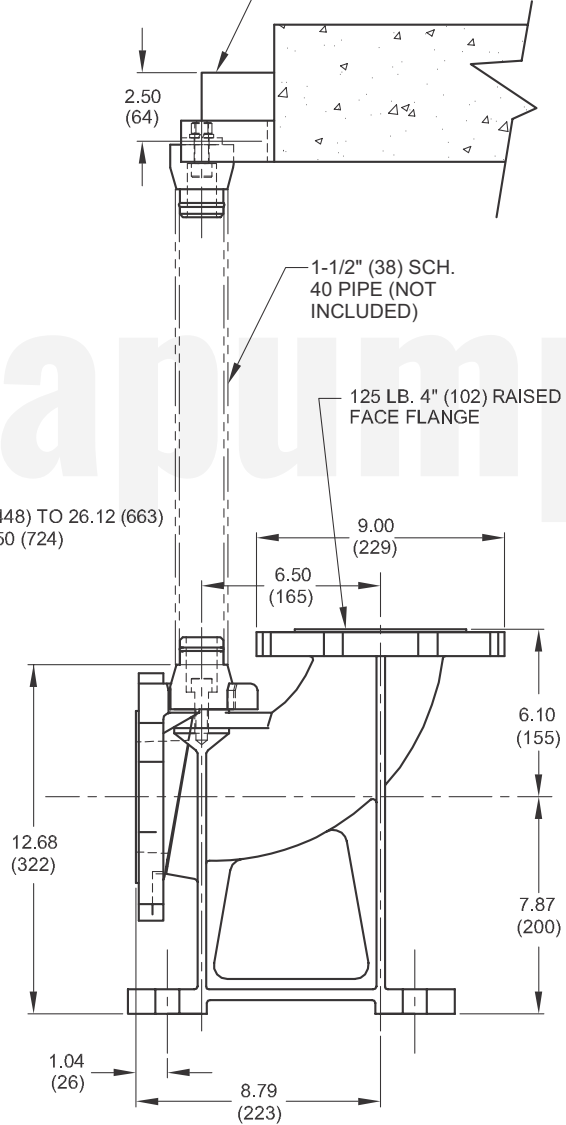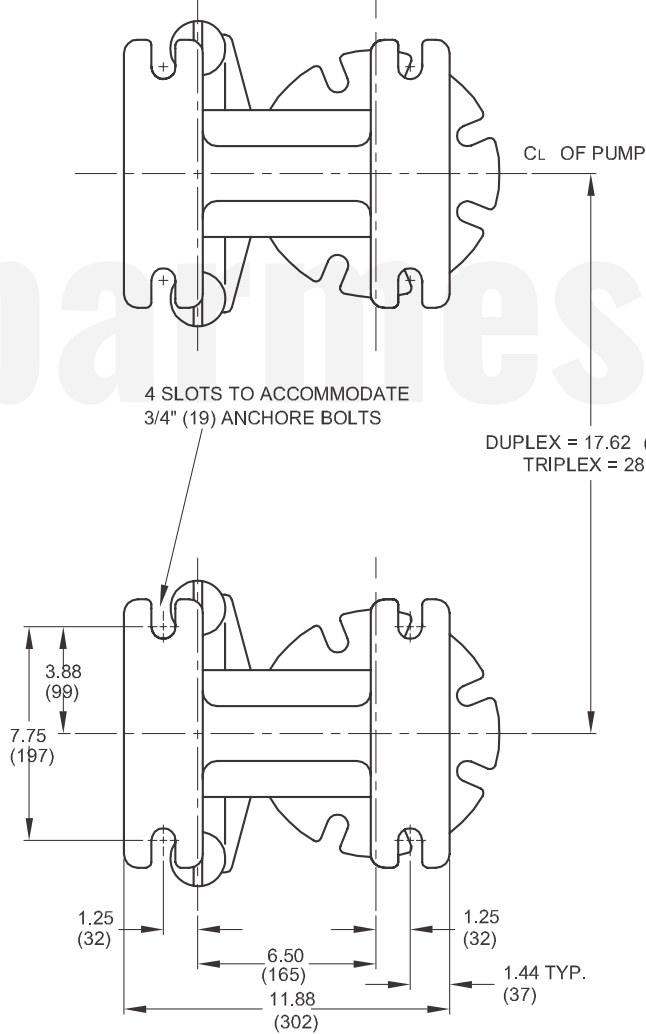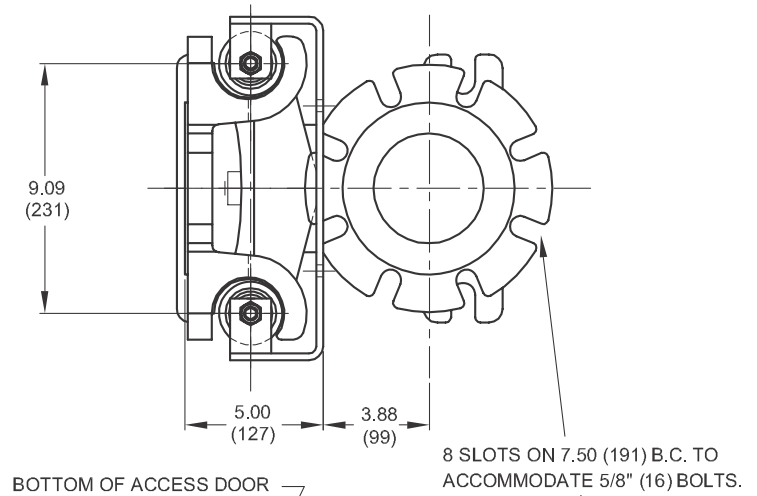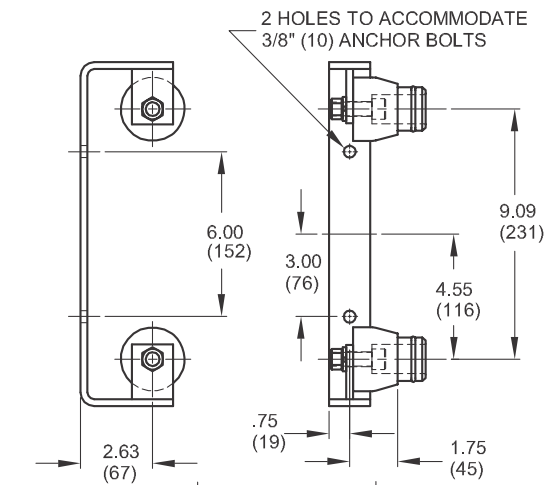

MODEL	PART No.	SIZE	RAILS	COUPLING	WEIGHT (pounds)
SRC4	62170801	4"	1½"	w/ upper guide bracket	117
SRC4-FA	62170817	4"	-	flygt adapter	36