



Ultra High Efficiency Quarter Stall Washout Urinal

Model
AUU-1018-14

Description

Ultra High Efficiency Quarter Stall Top Spud Washout Urinal

Flush Cycle

- 0.125 gpf to 1.0 gpf / 0.5 Lpf to 3.8 Lpf
- Flush volume is determined by flushometer used with urinal

Fixture Specifications

- Complies with ADA Accessible Standards
- White Color
- Wall Hung Vitreous China
- Washout Flushing Action
- Elongated Rim
- Integral Flushing Rim
- Integral Trap
- 3/4" (19mm) I.P.S. Top Spud Inlet (Included)
- 2" (50mm) NPT Outlet Flange (Included)
- 100% Factory Tested
- Hanging Bracket (1 Included)
- Flushometer Not Included



Plumbing System Requirements

- Minimum Flowing Pressure: 25 PSI
- Maximum Static Pressure: 80 PSI
- Minimum Flow Rate: 18 GPM

Compliance & Certifications


- ASME A112.19.2/CSA B45.1
- ADA- With installation consideration for "Section 605, Urinals" of the ADA 2010 Standard.
- ICC/ANSI A117.1
- ICC-ES PMG® Certified
- WaterSense® Listed



Warranty
1 Year

This space for Architect/Engineer Approval

The information contained in this document is subject to change without notice.

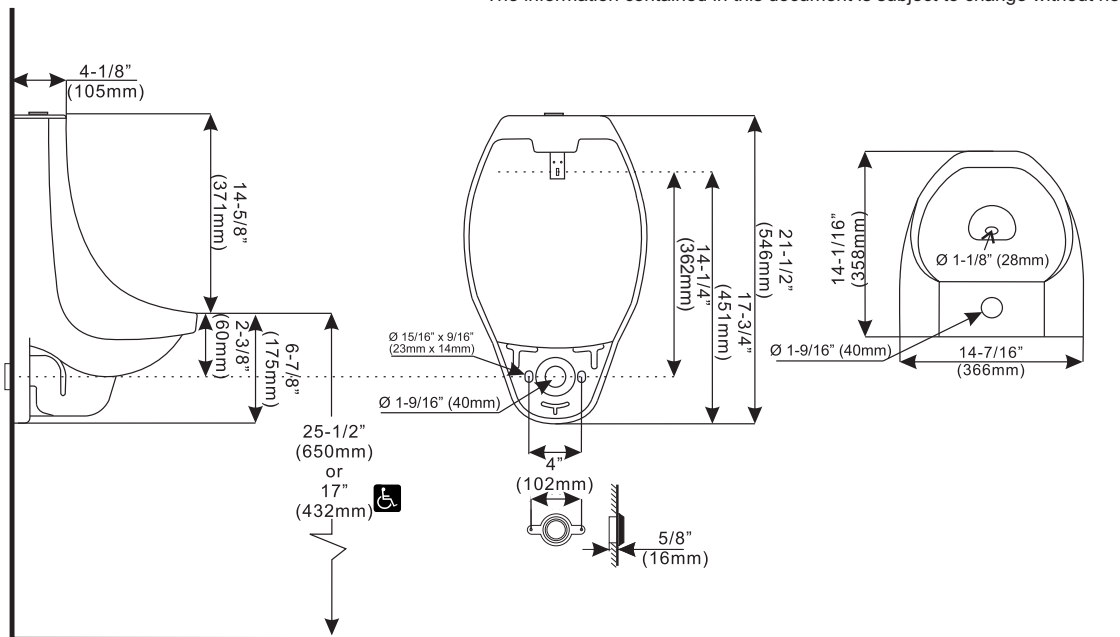

Advanced Modern Technologies Corporation • 19800 Nordhoff Place • Chatsworth, CA 91311
Tel: (818) 883-2682 • Toll Free: (800) 874-7822 • Fax: (818) 883-2620 • www.amtccorporation.com