




**ATS ELECTRO-LUBE**  
INTERNATIONAL INCORPORATED

# TITAN CL LUBER™

## Automatic Lubricator

The **TITAN CL LUBER™** is a powerful, motor-driven automatic lubricator which is built on the proven **ULTIMATE LUBER™** technology. The **TITAN CL LUBER™** is refillable by simply replacing a standard grease cartridge. Its microprocessor controlled, energy efficient motor delivers grease to a fixed displacement pump which produces pressures up to **900psi**. This strength allows the **TITAN CL LUBER™** to drive lubricant through long feed lines and to cycle progressive distributors to feed several bearings consecutively. When a valid dispensing cycle is selected, the units will activate at programmed intervals. At each interval, the **TITAN CL LUBER™** dispenses approximately 1.25cc of grease. Neither temperature nor altitude will affect the lubricant output.

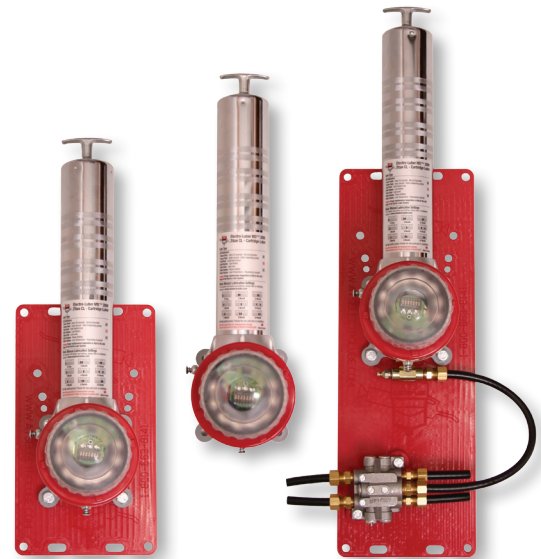

## Features

- Most powerful lubricator on the market. Produces up to **900psi** which enables it to service single-point applications up to 30' away (9 m.) and multi-point applications up to 20' (6 m.) away
- Available with long-life replaceable battery packs or **optional** external power sources. (AC and DC)
- **Optional** Remote Control available to connect to customer equipment or machinery (eg: PLC, Contactors, Relays)
- Multiple settings to empty from 15 days to 2 years.
- Single or Multi-Point configuration
- Refillable using a standard grease cartridge (no other tools needed)
- Able to service up to 12 lube points with **optional** progressive distribution block
- Unit is mounted on an easy to install mounting plate
- Suitable for indoor/outdoor use
- LED operation and warning indicators: (1-RED, 1-GREEN, 1-BLUE)
  - 1 GREEN flash every 20 seconds – normal operation
  - 1 GREEN flash every second (approx.) – unit is dispensing grease
  - 1 RED flash every 20 seconds – limit switch error (unit operating in failsafe (timed dispense) mode)
  - 2 RED flashes every 20 seconds – Low Battery warning
- 1 BLUE flash every 20 seconds – low grease level (grease cartridge needs to be replaced)
- 2 BLUE flashes every 20 seconds – unit is paused (remote control option)
- 4 BLUE flashes every 20 seconds – Low Temperature, dispensing is paused

### Temperature Range:

5°F to 132°F (-15°C to 55°C)  
(NOTE: Low Temp lubricants must be used at low temperatures)

### Size:

24.5" h X 6" w X 8" d  
(62cm. h X 15cm. w X 20cm. d).