

KEEP IT CLEAN



XLERATOR® HAND DRYER WALL GUARDS

MICROBAN® Wall Guards are designed specifically to fit securely underneath your XLERATOR hand dryers, protecting your walls from water droplets that can be blown off wet hands by the powerful air stream of the XLERATOR.

XLERATOR® HAND DRYER WALL GUARDS

C&L Supply Company
Smarter Industrial Solutions
Est. 1981
www.CandLsupply.com


4840 York Blvd
Los Angeles CA 90042
P: 323-258-1940
F: 323-258-6523
sales@CandLsupply.com



WALL GUARDS



PART #89W

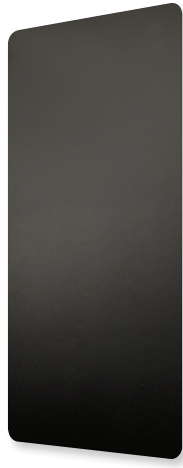

PART #89B



PART #89S

Part ID	Description	List Price
ANTI-MICROBIAL WALL GUARDS		
89W	MICROBAN® Wall Guard-White	\$120/Set*
89B	MICROBAN Wall Guard-Black	\$120/Set*
89S	Wall Guard-Stainless	\$200/Set*

*Set: 1 box of 2 wall guards

SPECIFICATIONS

Qty: 2 per set

Size: 31 3/4" x 15 3/4" x 1/16"

Weight: 89S: 11 lbs., 89W and 89B: 4 lbs.

INSTALLATION:

Mounted with 4 strips of construction grade 3M adhesive tape

MATERIALS

MICROBAN anti-microbial plastic: White or Black
or brushed stainless steel

INSTALLATION INSTRUCTIONS


- Clean the wall surface with ISOPROPYL ALCOHOL prior to installation and make sure that the surface is dry and free of any dust and debris.
 - Center the Wall Guard underneath the hand dryer so that the top of the Wall Guard is 1" below the bottom of the dryer.
 - Carefully measure and mark the wall surface for placement of the Wall Guard with a pencil or temporary marker.
 - Four strips of double-sided adhesive are included for each panel. Apply the tape strips to textured side of black or white panel and smooth side of brushed stainless panel as follows:
 - Lay out tape strips according to illustration at left.
 - Remove one strip and apply to either right or left side to start.
 - Press each tape strip firmly onto the plastic as it is applied.
 - Continue until all 4 strips are applied.
- Note: Alignment is critical. Once placed on the wall, the Wall Guard cannot be re-positioned.**
- Align the top edge of the Wall Guard with the markings on the wall and firmly press into place against the entire surface of the Wall Guard.
 - Optional: After guard is applied to the wall you may add silicone sealant around the edge.

CLEANING INSTRUCTIONS

Clean the installed Wall Guard with mild soapy water and a soft cloth. Mild dish soap mixed with water in a spray bottle works best.

DO NOT USE any cleaner that contains any ammonia or abrasive cleansers to clean the surface.

**NATIONAL INSTALLATION SERVICES AVAILABLE
CALL FOR DETAILS 800-255-9235**

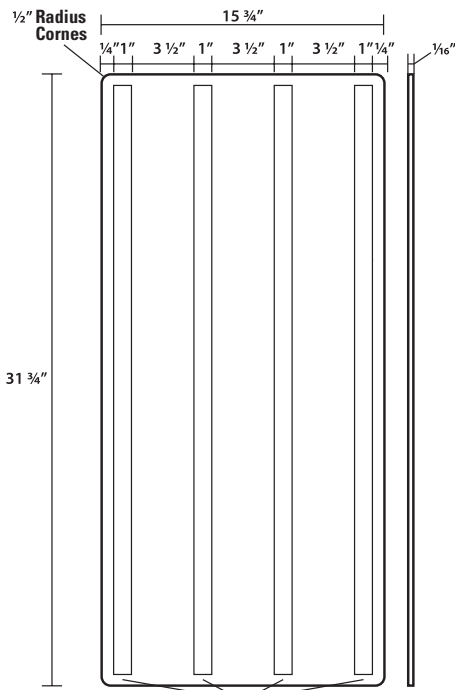

Recommended location of adhesive strips



TIME TO THROW IN THE TOWEL®

EXCEL DRYER INC • 1.800.255.9235 • EXCELDRYER.COM