

Global EV Connect



Global EV Connect


buyev.net

Tel: (949) 329 - 8924

Email: www.globalevconnect.com

Address: 24002 Via Fabricante Mission

Viejo, CA 92691

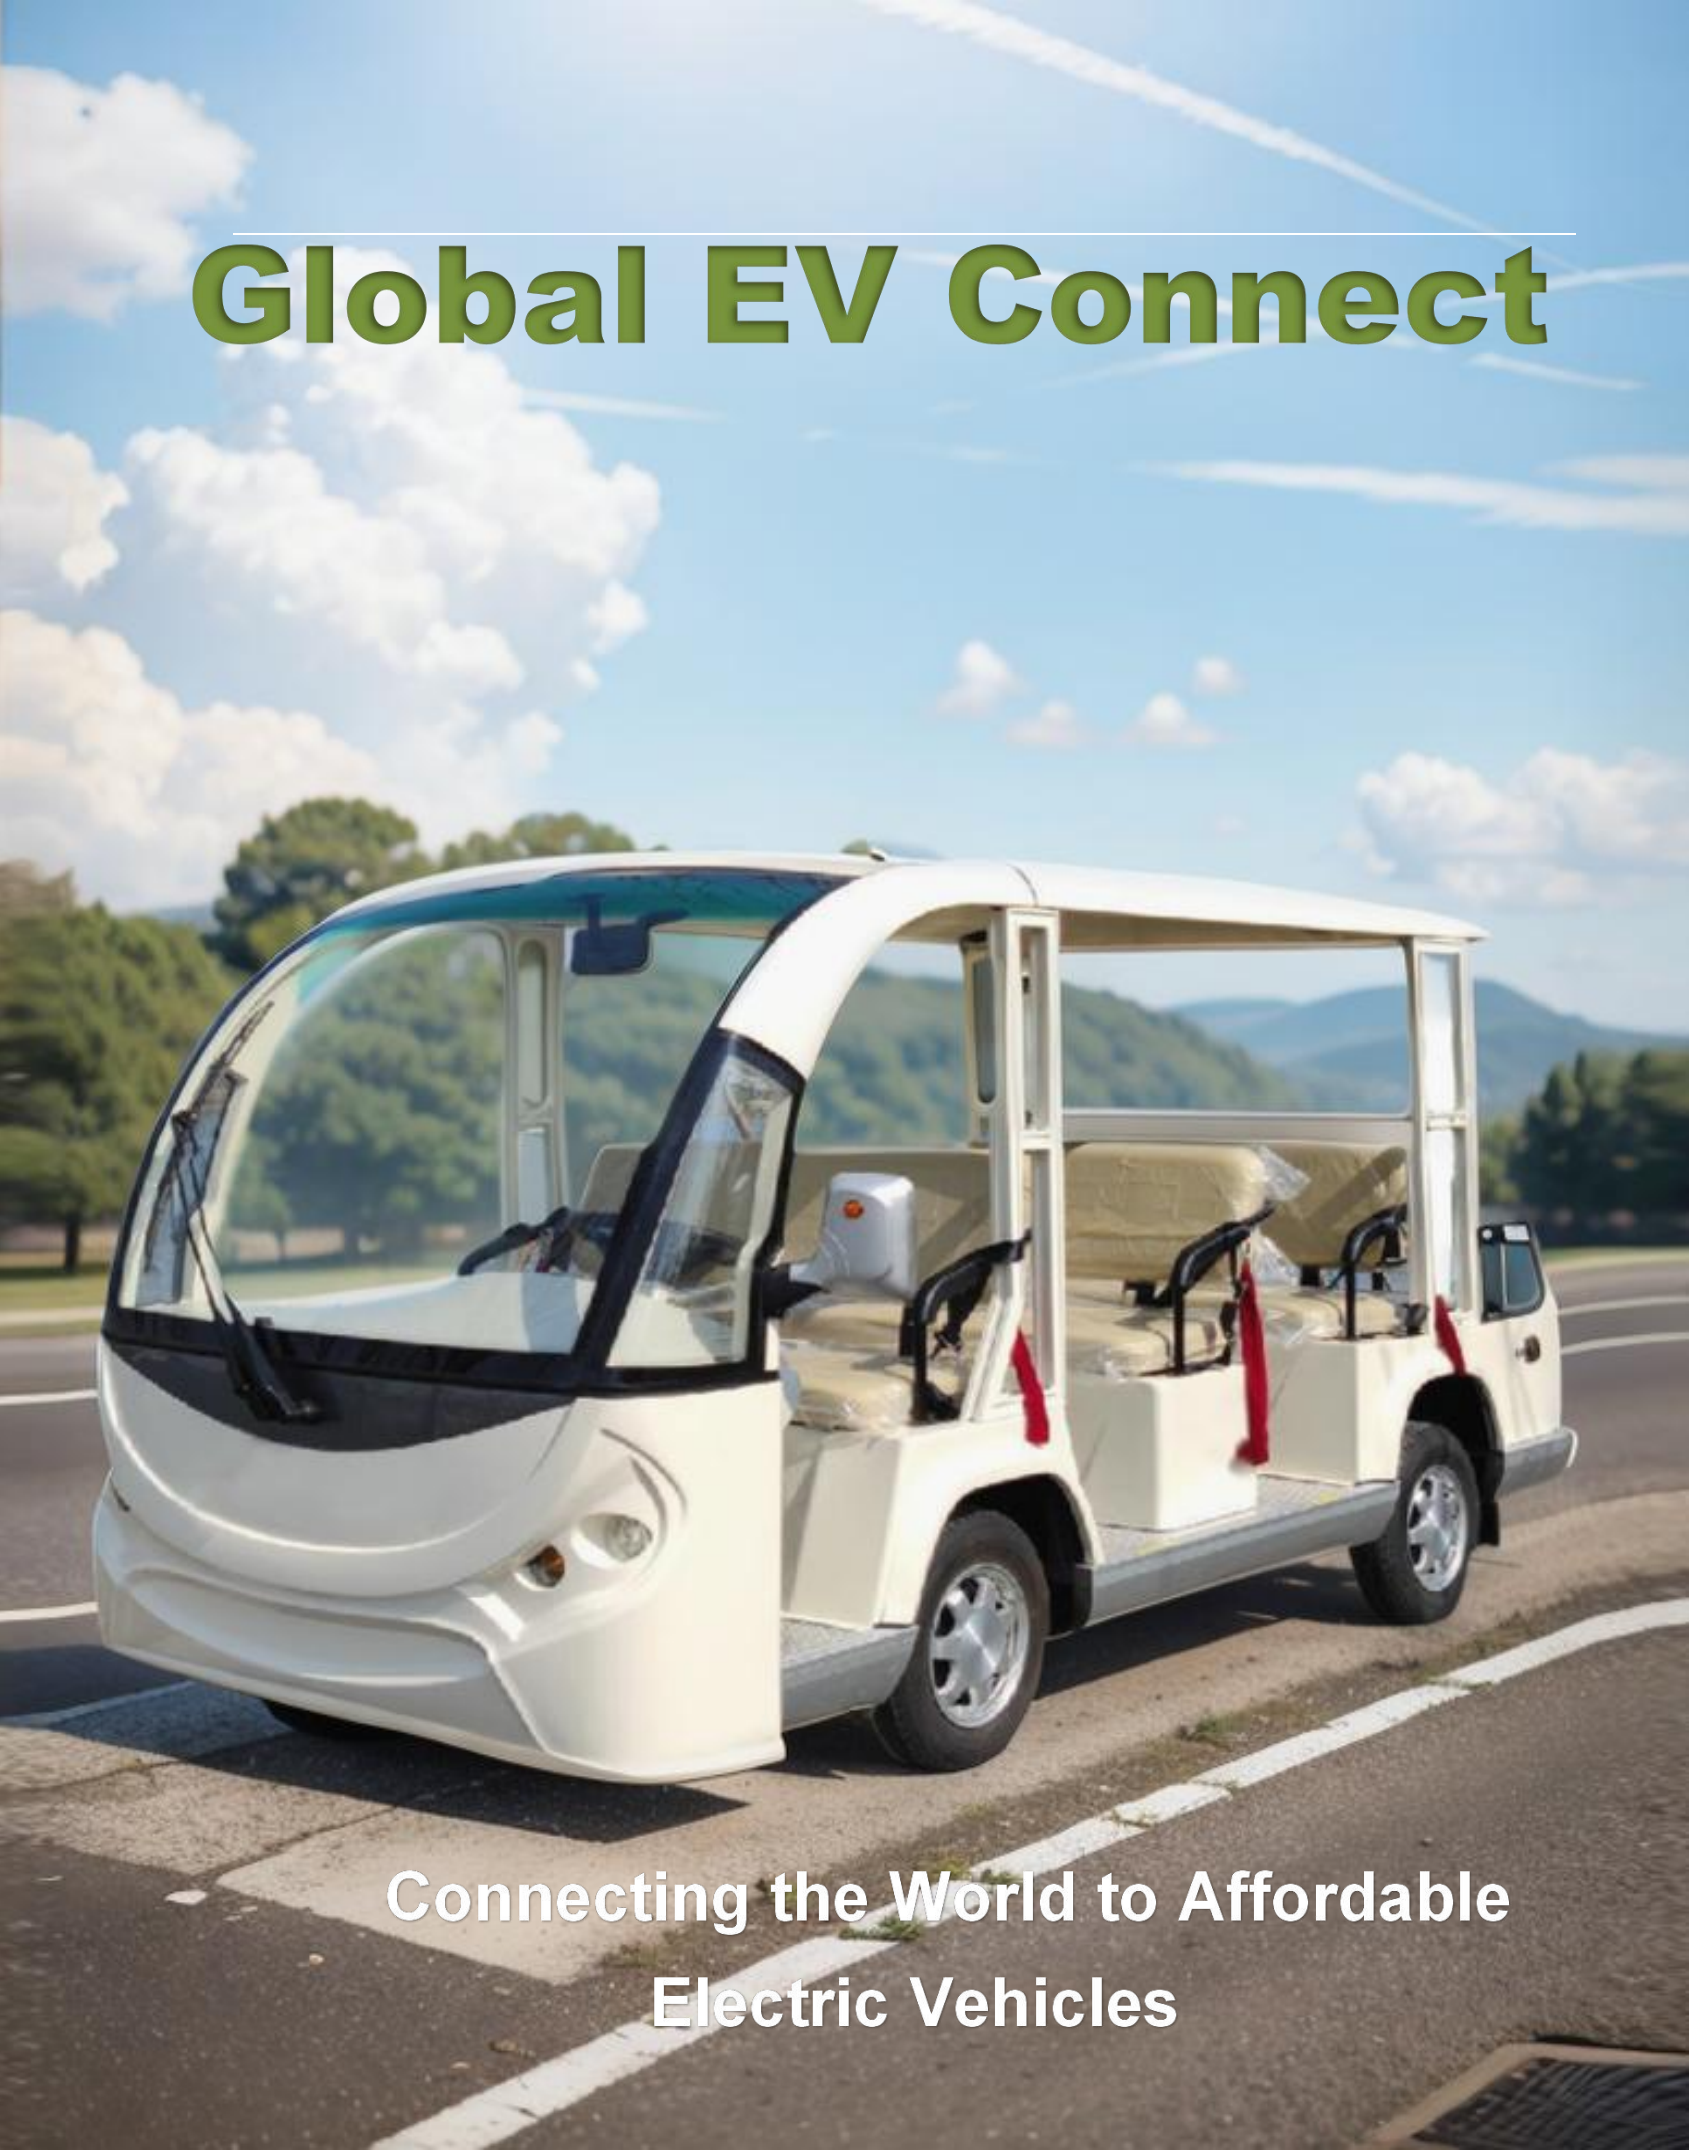

Connecting the World to Affordable
Electric Vehicles

● CONTENTS



Golf Cart

Electric golf cart is economical and environmentally friendly, suitable for short-distance riding, and suitable for various scenarios such as golf courses, airports, resorts, etc.

Global EV Connect

Golf Cart

AW2028KSZ -- 4 Person	01
AW2021KSZ -- 4 Person	02
AW2021BKSZ -- 4 Person	03

Shuttle Buses

AW6083K -- 8 Person	04
AW6143K -- 14 Person	05
AW6088K -- 8 Person	06
AW6158K -- 14 Person	07



GOLF CART

2+2 seats

Color options



AW2028KSZ -- Golf Cart Parameter Configuration

Technical Paramrtrrs

Overall Dimension	105*46*70 Inches
Passengers Capcity	4
Max. Speed	25Mph
Average. Traveling Range	40 Miles
Weight	1146Pound
Wheels&Tires	205/50-10 4PR

Electric System

Battery	6 x 8V setup
Motor	5KW PMSM motor
Battery Type	Lithium iron phosphate battery

Standard Equipment

- Lighting system and horn, Reversing alarm, Digital meter, Single-stage rack and pinion steering system, automatic rocker compensating function, Mechanical brake, Stepless speed change, Front and rear plate spring + cylinder hydraulic shock absorber, Rear axle two stage deceleration, motor direct driving.





GOLF CART

2+2 seats

Color options



AW2021KSZ -- Golf Cart Parameter Configuration

Technical Paramrttrs

Overall Dimension	105*46*70 Inches
Passengers Capcity	4
Max. Speed	25Mph
Average. Traveling Range	40 Miles
Weight	1146Pound
Wheels&Tires	205/50-10 4PR

Electric System

Battery	6 x 8V setup
Motor	5KW PMSM motor
Battery Type	Lithium iron phosphate battery

Standard Equipment

- Lighting system and horn, Reversing alarm, Digital meter, Single-stage rack and pinion steering system, automatic rocker compensating function, Mechanical brake, Stepless speed change, Front and rear plate spring + cylinder hydraulic shock absorber, Rear axle two stage deceleration, motor direct driving.





GOLF CART

2+2 seats

Color options  



AW2021BKSZ -- Golf Cart Parameter Configuration

Technical Paramtrrs


Overall Dimension	105*46*70 Inches
Passengers Capcity	4
Max. Speed	25Mph
Average. Traveling Range	40 Miles
Weight	1146Pound
Wheels&Tires	205/50-10 4PR

Electric System

Battery	6 x 8V setup
Motor	5KW PMSM motor
Battery Type	Lithium iron phosphate battery

Standard Equipment

- Lighting system and horn, Reversing alarm, Digital meter, 10"touchscreen, bluetooth, Speaker, Reverse camera, Single-stage rack and pinion steering system, automatic rocker compensating function, 4-wheel hydraulic brake, front disc brake, rear drum brake, Stepless speed change, Front independent suspension, rear axle + leaf spring, Rear axle two stage deceleration, motor direct driving.

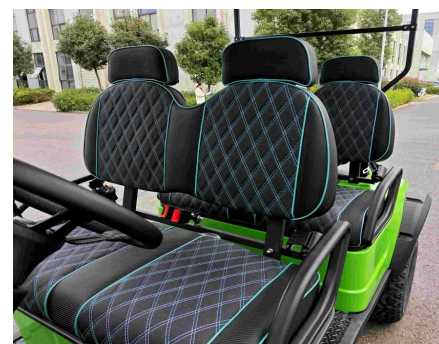



SHUTTLE BUSES

8 seats

Color options



AW6083K -- Shuttle Buses Parameter Configuration

Technical Paramtrrs

Overall Dimension	1614*604*815 Inches
Passengers Capcity	8
Max. Speed	19Mph
Average. Traveling Range	50 Miles
Weight	2227Pound
Wheels&Tires	155R12 8PR

Electric System

Battery	6 x 8V setup
Motor	7.5KW
Battery Type	Maintenance free battery

Standard Equipment

- Lighting system and horn, Audio System, Reversing alarm, Four wheel hydraulic drum brake+hand parking brake, Automatic drive system (stepless speed change), Independent suspension , Integral rear axle, coil spring non-independent suspension, hydraulic shock absorber tube.





SHUTTLE BUSES

14 seats

Color options

AW6143K -- Shuttle Buses Parameter Configuration

Technical Paramtrrs

• Overall Dimension	2008*604*815 Inches
• Passengers Capcity	14
• Max. Speed	19Mph
• Average. Traveling Range	60 Miles
• Weight	2469Pound
• Wheels&Tires	155R12 8PR

Electric System

• Battery	12 x 6V setup
• Motor	7.5KW
• Battery Type	Maintenance free battery

Standard Equipment

- Lighting system and horn, Audio System, Reversing alarm, Four wheel hydraulic drum brake+hand parking brake, Brake booster, Automatic drive system (stepless speed change), Independent suspension, Integral rear axle, coil spring non-independent suspension, hydraulic shock absorber tube.





SHUTTLE BUSES

8 seats

Color options



AW6088K -- Shuttle Buses Parameter Configuration

Technical Paramtrrs

Overall Dimension	1614*604*815 Inches
Passengers Capcity	8
Max. Speed	19Mph
Average. Traveling Range	50 Miles
Weight	2227Pound
Wheels&Tires	155R12 8PR

Electric System

Battery	6 x 8V setup
Motor	7.5KW
Battery Type	Maintenance free battery

Standard Equipment

- Lighting system and horn, Audio System, Reversing alarm, Four wheel hydraulic drum brake+hand parking brake, Automatic drive system (stepless speed change), Independent suspension , Integral rear axle, coil spring non-independent suspension, hydraulic shock absorber tube.





SHUTTLE BUSES

14 seats

Color options

AW6158K -- Shuttle Buses Parameter Configuration

Technical Paramtrrs

Overall Dimension	2008*604*815 Inches
Passengers Capcity	14
Max. Speed	19Mph
Average. Traveling Range	60 Miles
Weight	2469Pound
Wheels&Tires	155R12 8PR

Electric System

Battery	12 x 6V setup
Motor	7.5KW
Battery Type	Maintenance free battery

Standard Equipment

- Lighting system and horn, Audio System, Reversing alarm, Four wheel hydraulic drum brake+hand parking brake, Brake booster, Automatic drive system (stepless speed change), Independent suspension, Integral rear axle, coil spring non-independent suspension, hydraulic shock absorber tube.



Electric series

Golf carts / Small pickup trucks / Mini car / Moped

Safer, more environmentally friendly, and an unparalleled driving experience is here!



Stay tuned for more
information ...

