


TOP PIVOT ASSEMBLY


TOP PIVOT BRACKET

BOTTOM PIVOT ASSEMBLY

BOTTOM PIVOT BRACKET

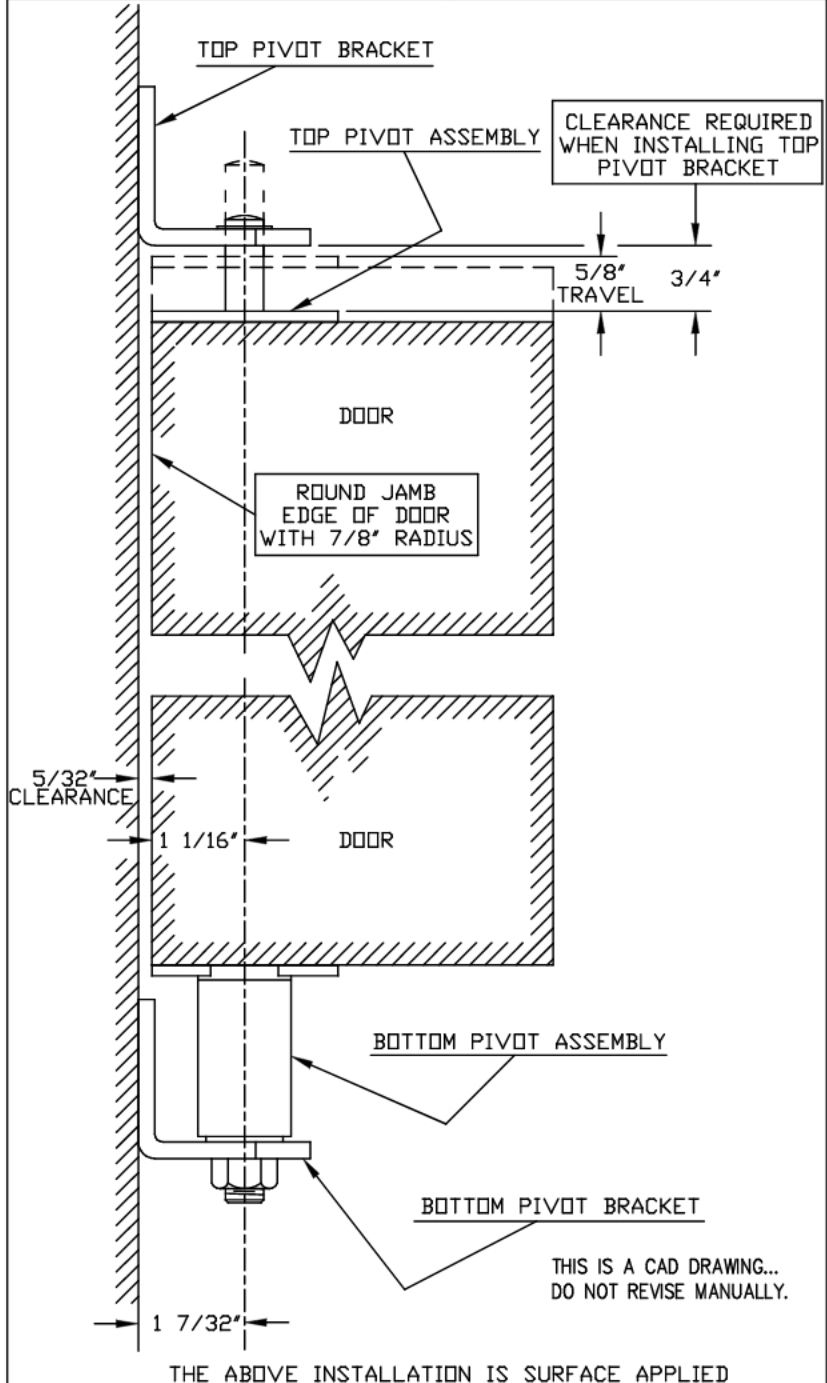

THE ABOVE INSTALLATION IS SURFACE APPLIED

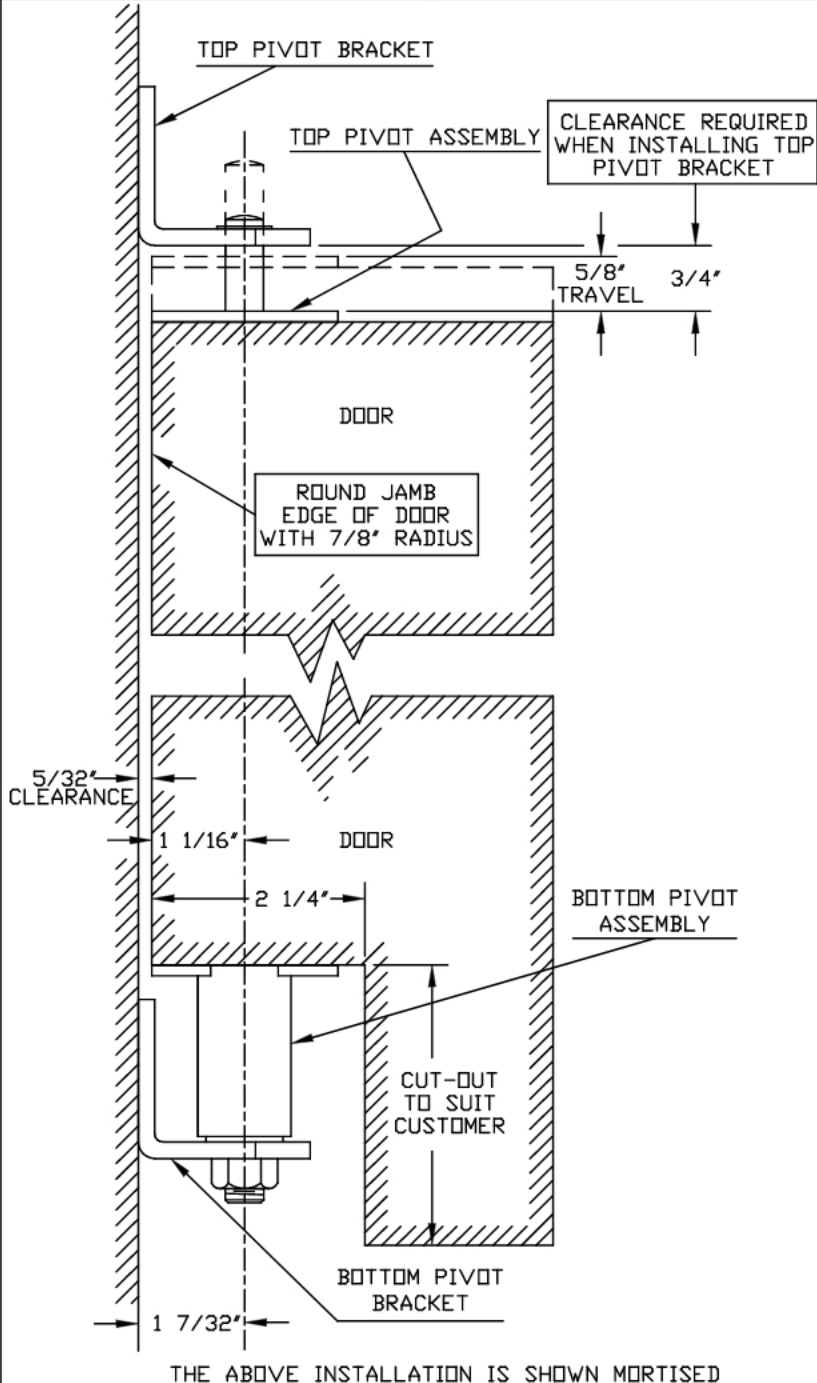

THE ABOVE INSTALLATION IS SHOWN MORTISED

-----DOOR-----		SCREWS		-----NOTE-----					
MAXIMUM WIDTH: 30" MAXIMUM WEIGHT: 50 LB. MAXIMUM THICKNESS: 7/8" TO 1 5/8"		TOP AND BOTTOM PIVOT ASSY. No. 10 x 1" F.H.W.S. ( 4 ) 10-24 x 1/2" F.H.M.S. ( 4 ) TOP AND BOTTOM BRACKET No. 10 x 1 1/4" F.H.W.S. ( 4 ) 10-24 x 1/2" F.H.M.S. ( 4 )		DOOR THICKNESS 7/8" TO 1 5/8"		TYPE : LOUVER DOOR GRAVITY PIVOT DOUBLE ACTING			
		*PIVOT EDGE OF DOOR WILL HAVE TO BE ROUNDED TO 7/8" RADIUS FROM THE PIVOT CENTER LINE TO CLEAR JAMB		Drawn by : Approved by :		DATE 09 AUG 22	SCALE N.T.S.	DRAWING NUMBER	REV. A