


The next generation of DECT wireless headsets from Discover Headsets



Discover Adapt 30

The **Discover Adapt 30** is a dual speaker wireless DECT headset that comes complete with the USB Cartridge Module that gives you softphone interoperability with the assistance from the JPL Gateway.

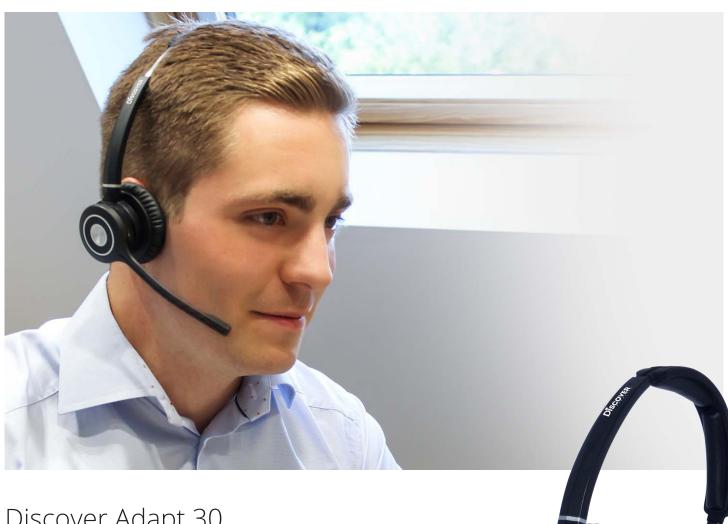















Improved and better than ever, this wireless DECT headset uses our patented modular system with multiple combinations that future proof the headset for further developments in Bluetooth and USB technology.

The **Discover Adapt 30** has been upgraded to include enhanced software for better compatibility and sound, new headband design with padded headband cushion, larger ear cushions, and swivel speaker housing for your all day wearing comfort, as well as a longer microphone boom arm to further enhance the Surround Shield™ noise cancellation.



Optimised to work with:

















Overview

Features	Dual or single* speaker - Patented user inter-changeable headband
	from dual to single* speaker wearing style
	Left / right ear side compatible
	Patented universal base with USB Cartridge Drawer and port to accept
	a Bluetooth* slot-in cartridge drawer
	DECT security compliant - with DECT standard A, designed to safeguard against eavesdropping
	'Put and stay' ratchet microphone boom arm with Surround Shield™ noise cancelling
	Wideband enabled speakers with Sound Shield™ hearing protection
	Max 100m (300ft) coverage
	6-7 hours wideband audio (stand by ~ 50 hours), recharge (60 - 90 mins)
	5 headsets can be paired to one base, allowing any one of the five headsets to answer a call. When call is answered by any of the headsets, the other four go back to stand-by
	65mm leatherette ear cushions and padded headband cushion for all day comfort
What's included	Universal base unit with USB cartridge module, microphone boom arm, binaural headband, telephone connection cable & switch mode multi country power adapter
Headset Weight	Light-weight headset, ~ 102g
Connection	DECT, 1.9GHz (North America)
Base Connection	Base to desk phone via RJ11 - supplied as standard. Upgrade base to Bluetooth* using additional cartridge modules
Compatibility*	EHS (Full range of EHS cords available), USB, Bluetooth
Certifications	UKCA, CE, FCC, RoHS, REACH
Warranty	2 Years repair or replacement warranty





Wireless Frequency:	1.96GHz (North America)
Microphone:	
Sensitivity:	-44 dB ± 3 dB at 1 kHz
Frequency Range:	10Hz~10kHz
Radio Frequency	EU: 24dBm(250mW)
Tx Power:	US: 20dBm(100mW)
Speaker:	
Impedance:	20 ø speaker element; 32Ω
Frequency Range:	300Hz~7000Hz @1kHz (input:100mV)
Battery Type:	Lithium Polymer 370mA
Power Supply:	DC 9V 500mA
Operating Temp:	-10° to +60°C (14° to +140°F)
Storage Temp:	-30° to +70°C (-22° to +158°F)







Optimised to work with:













