MW27BDY WALL DIVERTER CONCEALED BODY

meir.




FEATURES

- Refer to the Meir website for warranty terms & conditions, and available finishes
- Flow rate 18L p/m
- 2-way diverter
- European components and cartridge
- Solid brass construction

CARE

- Do not install tapware using any form of acetone silicones.
- Do not apply physical items (such as tools)directlytoproduct.
- Never use house-hold or commercial detergents, citrus based cleaners, or abrasive cleaners.
- Clean using a mild washing soap solution rinsed, and dry with a soft cloth.
- Check for any product defects before installation.
- Refer to the installation manual for correct installation.


FLOW RATE GRAPH

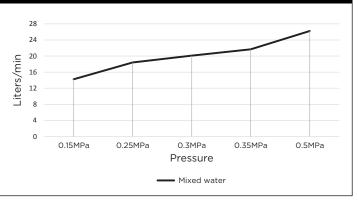


CREDENTIALS

• Watermark AS/NZS 3718WMKA25013

SPECIFICATIONS





TOLERANCES



WALL FINISH TOLERANCE

EXPLODED VIEW

