



MATERIALS

Coats & Clark™ Dual Duty XP® All-purpose Thread

¼ yd (23cm) each of six different fabrics, for front
½ yd (46cm) backing fabric
½ yd (46cm) lining fabric
½ yd (46cm) cotton or cotton/polyester batting
⅓ yd (30.5cm) grosgrain ribbon, ⅜" (1cm)
Removable marker

 SEWING, QUILTING | SKILL LEVEL: EASY

Featuring Coats & Clark™ Dual Duty XP® All-purpose Thread

Whether you're a beginning quilter or an experienced one, this modern stocking will turn out great. Select non-traditional colors for the wonky stripes then have fun using this stitch-and-flip technique.

MEASUREMENTS

19" (48.5cm) tall, 13" (33cm) wide

CUTTING

Note: The stocking front sections are numbered, so pick corresponding fabrics and number them as well, as the sections are cut different sizes.

From the stocking front fabrics, cut:

section 1: 5" x 9" (13cm x 23cm)

sections 2, 3 and 4: 5" x 9½" (13cm x 24cm)

section 5: 6" x 11½" (15cm x 29cm)

section 6: 6 ½" x 13½" (16.5cm x 34.5cm)

From the backing fabric, cut:

(1) stocking (note the direction)

From the lining, cut:

(2) stockings

From the batting, cut:

(1) stocking front: Trace the stocking shape onto fleece, marking the lines between the sections on the stocking front. Trim the fleece 2" (5cm) outside the outline.

(1) stocking back

Seam allowances are ¼" (.64cm).

ASSEMBLING THE STOCKING FRONT

Note: For this stitch-and-flip technique, fold the pieces down for a test-fit before stitching the sections together to be sure the new piece will cover the entire area needed. Adjust if needed, prior to stitching.

1. Lay section 1 along the upper edge of the stocking right side up. Pin in place. Fold back the lower edge to crease the fabric along the marked line between sections 1 and 2; trim along the crease line.
2. Lay section 2 right side down over section 1, matching the lower edges. Sew across the lower edge through all layers. Flip section 2 down and mark the crease line between sections 2 and 3. Trim along the crease line.
3. Repeat steps 1 and 2 to cover the entire stocking front, being sure that each fabric section covers the stocking marked width.
4. Quilt each section parallel to the seams, using matching or contrasting thread and stitching as many rows as desired. Set your machine to a stretch stitch with the stitch length 3mm. A stretch stitch sews 3 times over each stitch producing a more prominent line stitching. Quilt on each side of the seam.

5. Lay the stocking pattern over the pieced stocking, aligning the piecing seams. Mark the edges and stitch on the outside lines. Cut out the stocking shape.

ASSEMBLING THE STOCKING BACK


1. With wrong sides together, layer the stocking back over the fleece stocking shape, matching edges.
2. Baste around the edges. Add some quilting lines to mimic the stocking front.

ASSEMBLING THE STOCKING


1. Place the stocking front and back right sides together and sew around, leaving the upper edge open. Clip the curves.
2. Turn the stocking right side out and press the edges.
3. To make the hanger, fold the ribbon length wrong sides together and stitch to the upper stocking opening, just behind the left side seam. Raw edges should be even with the upper stocking edge.

4. Sew the lining right sides together, leaving the upper edge open and leaving a 3" (7.5cm) opening along one side for turning. Begin and end with a ¼" (.64cm) seam, but widen the seam allowance to ⅜" (1cm) for most of the stocking so that the lining will be slightly smaller than the stocking and fit smoothly inside it. Trim the seam allowances.
5. With right sides together, slip the lining over the stocking, matching the side seams and toe direction. Sew around the top of the stocking with the hanging loop between the lining and stocking layers.
6. Turn the stocking right side out, stitch the lining opening closed, and push the lining into the stocking. Press the upper edges. Topstitch upper edge, if desired.



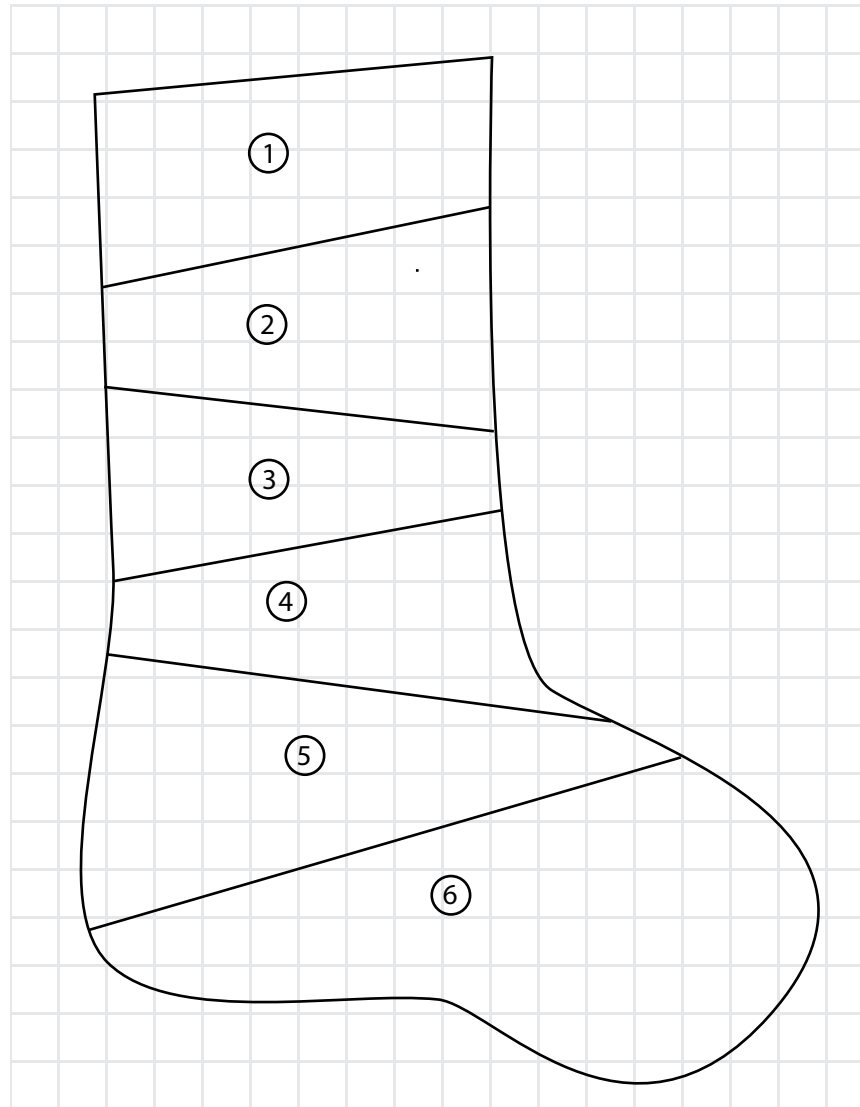

1 square = .25 inch

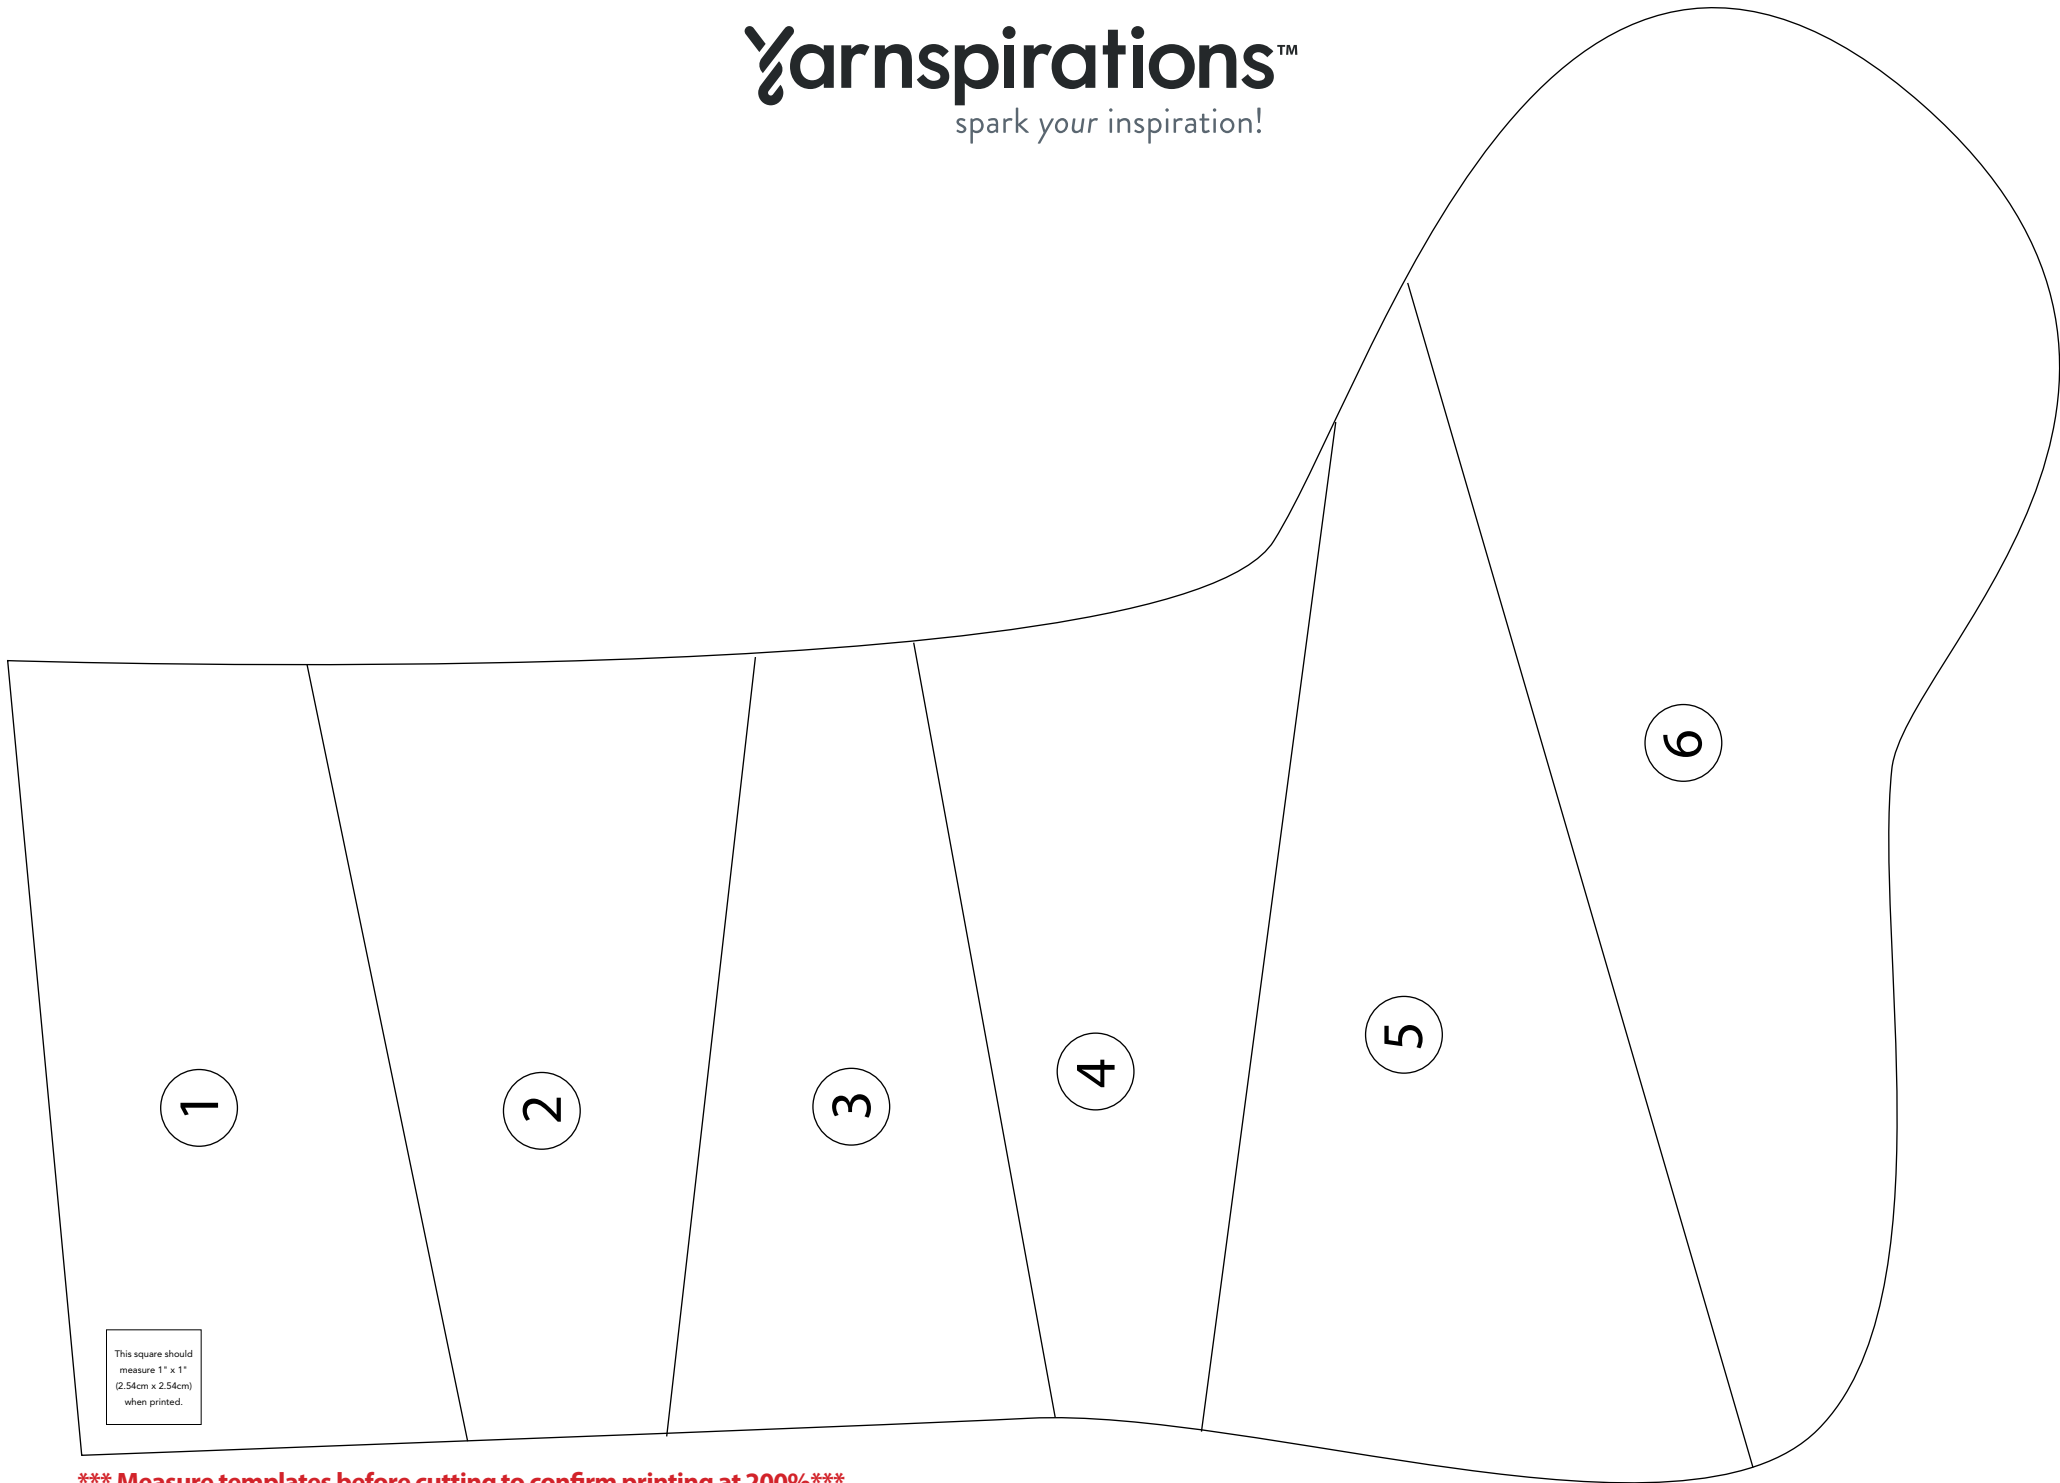

***** Measure templates before cutting to confirm printing at 200%*****