



Technique:	Sewing
Designed By:	Linda Turner Griepentrog
Skill Level:	Intermediate
Crafting Time:	Weekend
Finished size:	5" x 7½" (12.70cm x 19.05cm)

## Featuring Coats Dual Duty XP®


Whether you need a cute clutch or a case for your digital camera, this handy little holder fills the bill. Our clutch uses coordinating fabrics from new FreeSpirit designer Odile Bailloeu's collection Broderie Boheme.

## Supplies


- **Coats Dual Duty XP® All-purpose thread**
- The featured fabrics are from the Broderie Boheme Collection by Odile Bailloeu.
- ½ yd (30.48cm) PWOB004 Labyrinth, for outer bag
- ½ yd (30.48cm) PWOB003 Grandma's Curtains, for lining
- ½ yd (30.48cm) PWOB006 Embroidered Flowers, for binding



PWOB004



PWOB003



PWOB006

- ¾ yd (34.29cm) double-sided fusible craft interfacing, 20" (50.80cm) wide
- ⅞" (2.22cm) snap
- Triangle button
- Round button
- Pattern tracing paper
- Zipper foot

## Pattern Preparation

Trace the bag end pattern onto pattern tracing paper and cut out.

To make the bag body pattern, draw a 7½" x 18" (19.05cm x 45.72cm) rectangle on pattern paper, Gently round the two corners on one short edge.

## Cutting

**From both the outer bag and lining fabrics, and interfacing, cut:**

- (2) bag ends
- (1) bag body

**From the binding fabric, cut:**

- (1) strip on the straight grain, 18" (45.72cm) long, for upper edges
- Enough 2½" (6.35cm) bias strips to make 45" (1.14m) finished binding

## Preparation

1. With the interfacing between, fuse each end and bag body piece with lining on one side and the outer bag fabric on the opposite side.
2. Sew together the bias binding strips end to end using diagonal seams.


## Assembling the Bag

1. Using the straight-grain binding strips, bind the upper edges of both end pieces and the short straight edge of the bag body.
2. With lining sides together and matching the previously bound edges exactly, stitch the ends to the bag body, easing around the curves. Stitch slowly and carefully to maintain an even ¼" (.64cm) seam allowance. A zipper foot can be helpful for this task.
3. Leaving enough for turn-under, use the bias to bind the end panel seam and continue on to do the flap and opposite end panel. Turn under the ends neatly and hand-stitch the other bias edge in place, turning it under as you go.

## Finishing

1. Lap the flap over the bag front to the desired location. Center and mark the snap location.
2. Hand-stitch the snap in place on the bag front and the opposite half on the flap.
3. Stack the triangle and round button, and sew on over the snap location.



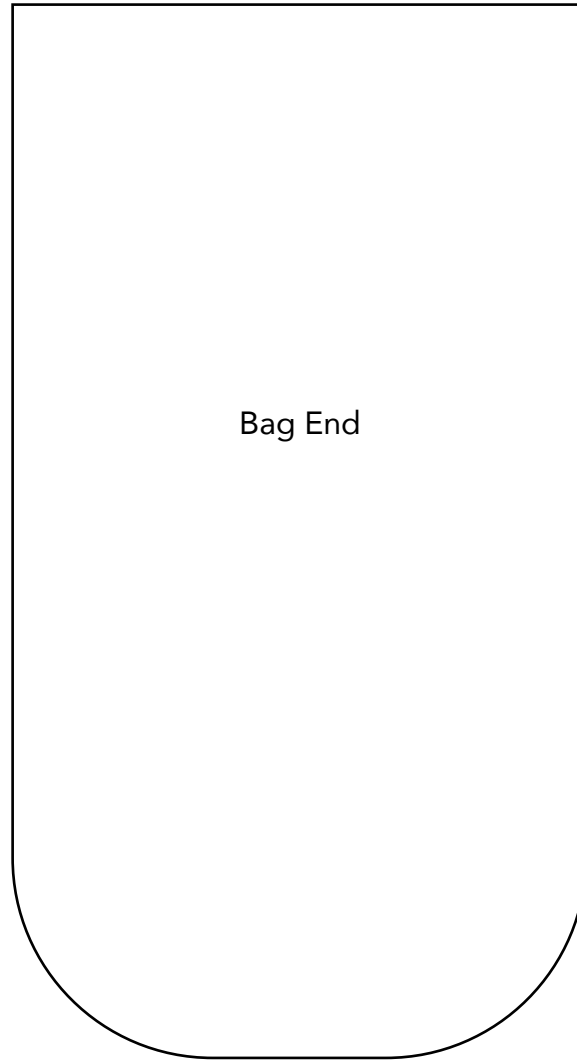

This square should  
measure 1" x 1"  
(2.54cm x 2.54cm)  
when printed.

\*\*\* Measure templates before cutting to confirm printing at 100%\*\*\*