

HER CABLED PULLOVER | KNIT

SHOP KIT



Her Cabled Pullover

Designed by Melissa Leapman.

Directions are for size Small; changes for sizes Medium, Large and XLarge are in parentheses.

Finished Bust: 34 (38½, 43½, 48)"

Length: 21 (21½, 22, 23)"

RED HEART® "Soft Yarn": 1 ball 9523 Dark Leaf **A** and 7 (7, 8, 8) balls 9522 Leaf **B**.

Knitting Needles: 3.75 mm [US 5] and 4.5 mm [US 7]. Cable needle, yarn needle.

Note: For His Cabled Pullover, see pattern WR2063 at www.redheart.com

GAUGE: 27 sts = 4"; 24 rows = 4" in Cable Pattern with larger needles. **CHECK YOUR GAUGE**. **Use any size needles to obtain the gauge**.

K1 p1 Rib Pattern (multiple of 2 sts)
Row 1 (right side): * K1, p1; repeat from *.
Repeat Row 1 for K1, p1 rib.

Cable Pattern

See Chart.

SWEATER

Back

With smaller needles and **A**, cast on 114 (130, 146, 162) sts. Change to **B**, and work in K1 p1 rib until piece measures 2" from beginning, ending with a wrong side row.

Change to larger needles, begin Cable Pattern, and work even until piece measures 11½ (11½, 12, 12½)" from beginning, ending with a wrong side row.

Shape Armholes

Bind off 8 (16, 24, 24) sts at beginning of next two rows–98 (98, 98, 114) sts.

Work even until piece measures 20 (20½, 21, 22)" from beginning, ending with a wrong side row.

Shape Shoulders

Bind off 8 (8, 8, 11) sts at beginning of next four rows. Bind off 9 (9, 9, 11) sts at beginning of next two rows. Bind off remaining 48 sts for back of neck.

Front

Work same as for Back until piece measures 18½ (19, 19½, 20½)" from beginning, ending with a wrong side row.

Shape Neck

Next Row (right side): Work across first 38 (38, 38, 46) sts; join a second ball of yarn and bind off center 22 sts, continue pattern as established to end row.

Working both sides at once with separate balls of yarn, bind off 4 sts each neck edge once, then bind off 3 sts each neck edge twice—28 (28, 28, 36) sts each side.

Dec 1 st each neck edge every row three times—25 (25, 25, 33) sts each side.





HER CABLED PULLOVER | KNIT

Work even until piece measures same as Back to shoulders, ending with a wrong side row.

Shape Shoulders

Same as for Back.

Sleeves (make 2)

With smaller needles and $\bf A$, cast on 66 sts. Change to $\bf B$, and work in K1 p1 rib until piece measures 2" from beginning, ending with a wrong side row.

Change to larger needles, begin Cable Pattern, and inc 1 st each side every other row 0 (7, 10, 18) times, then every fourth row 20 (21, 18, 13) times, then every sixth row 4 (0, 0, 0) times—114 (122, 122, 128) sts.

Work even until piece measures 21¼ (21¾, 21¾, 21¾, 21)" from beginning, ending with a wrong side row. Bind off.

FINISHING

Sew left shoulder seam.

Neckband

With right side facing, smaller needles, and **B**, pick up and knit 102 sts around neckline. Work K1 p1 rib until band measures 3½". Change to **A**, work one more row in rib, then bind off loosely in rib.


Sew right shoulder seam, including side of neckband.


Set in sleeves. Sew sleeve and side seams.



RED HEART® "Soft Yarn" Art. E728 available in solid 5 oz (140 g), 256 yd (234 m); print 4 oz (113 g), 204 yd (187 m) balls.

ABBREVIATIONS: A, B = color A, B; **dec** = decrease; **K** = knit; **mm** = millimeters; **inc** = increase; **P** = purl; **st(s)** = stitch(es).

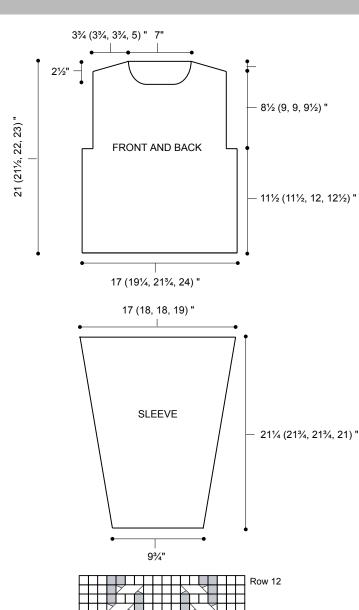



Stitch Key

knit on right side, purl on wrong side

purl on right side, knit on wrong side

2/2 LC Slip 2 sts to cn, hold to front, k2, k2 from cn

2/2 RC Slip 2 sts to cn, hold to back, k2, k2 from cn

2/1 RPC Slip 1 st to cn, hold to back, k2; p1 from cn

2/1 LPC Slip 2 sts to cn, hold to front, p1; k2 from cn