





Floor Hammock Installation Instructions


A Fold up rear seats.

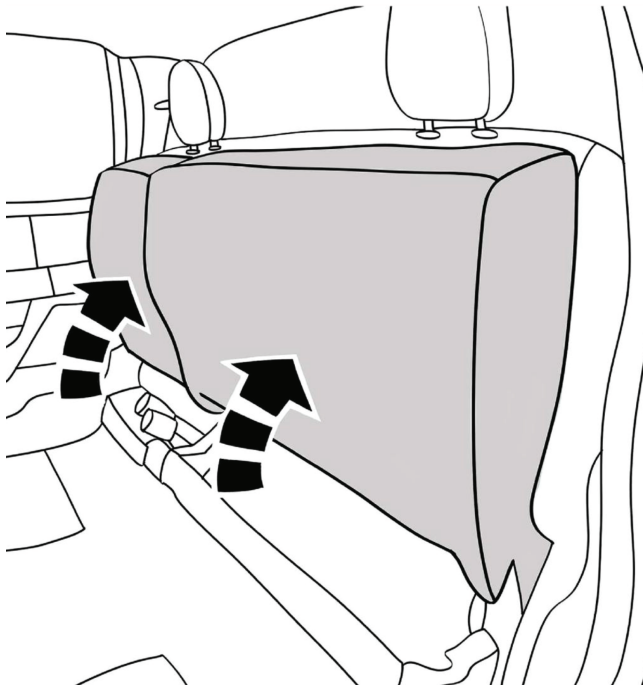


B Lay hammock on floor.

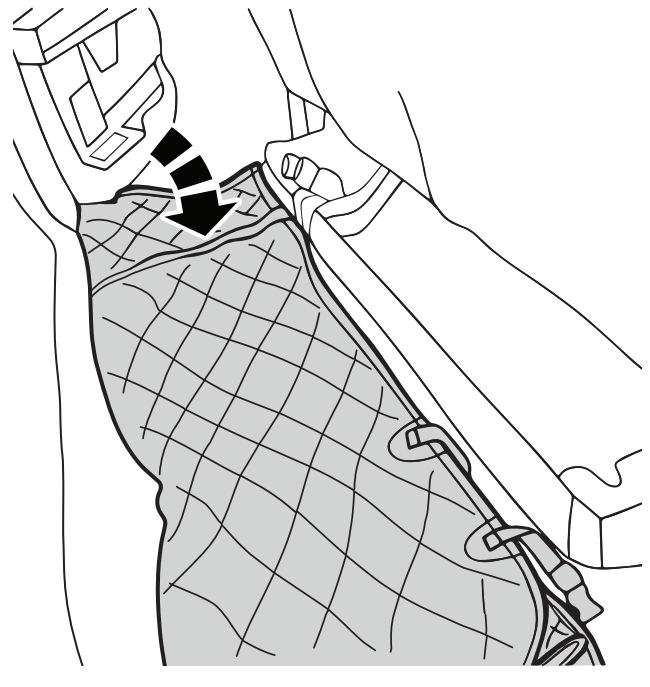


C Unfold hammock towards the front seats and attach 2 headrest straps to the front seats. Adjust straps to ensure cover is flush with second-row floor.

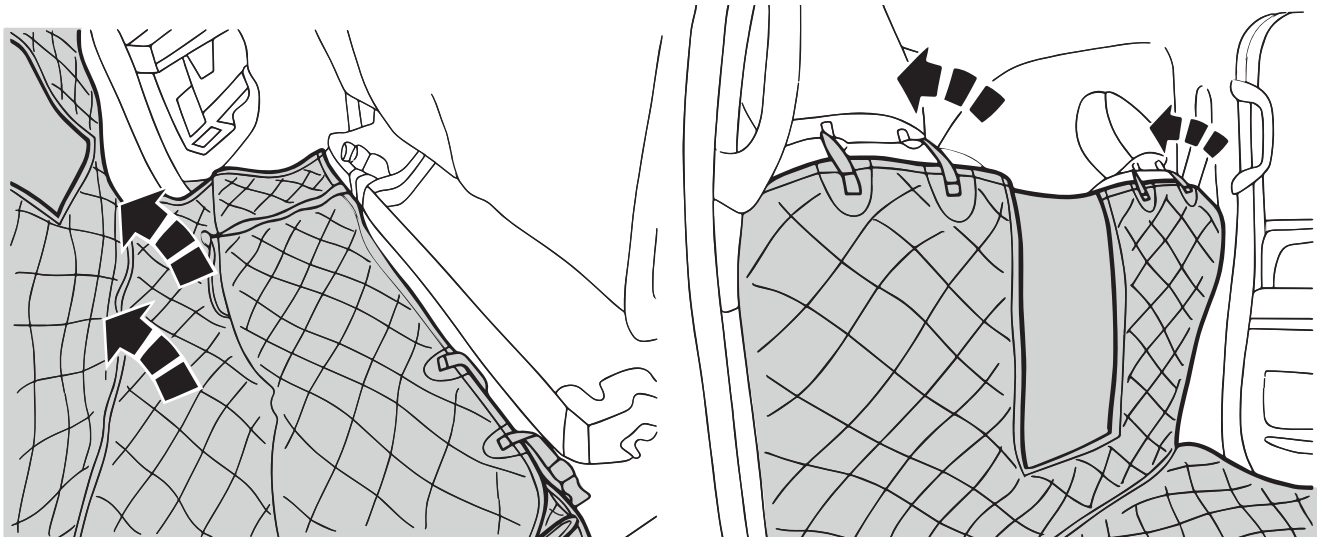

D Unfold hammock towards the rear seats and attach 3 headrest straps to rear seats. Again, ensure cover is flush with second-row floor.

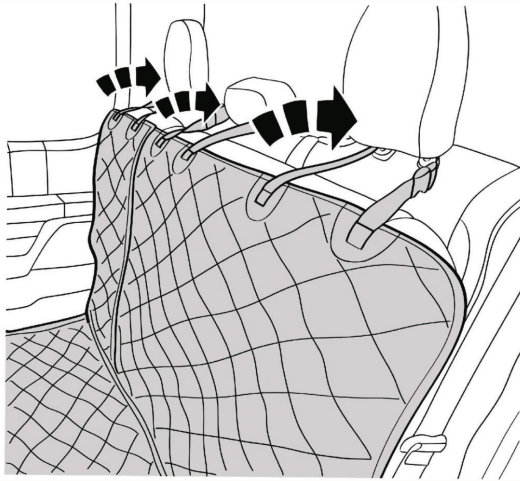

E Remove strap from headrest and unzip back panel zipper. Fold down seat. Stow material underneath.

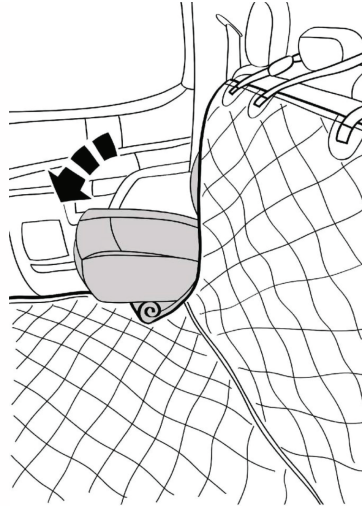

F Unzip mesh panel for access to rear seat area.



Care & Maintenance

- Vacuum when necessary
- Wipe with moist towel to spot clean
- For big messes, remove the cover and wash with hose
- Hang to air dry

Limited Warranty

All 4Knines products are warranted to be free from defects in materials or workmanship on products properly installed per the installation instructions provided with the product. This warranty covers repair or replacement of any defective product at no charge.