



Quilter FRONTLINER 2X8 Manual
P/N 000825 Rev. A
www.quilterlabs.com
Copyright 2017



Quilter™

Performance Amplification

OWNER'S MANUAL



Using your FRONTLINER 2x8 with a Quilter Block Series amplifier



1) Remove two thumbscrews from rear retainer plate.



2) Insert the 1/4" speaker cable into the 4 Ohm speaker jack on the back of the amplifier.



3) For Quilter "Block style". (i.e. Tone Block, Pro Block, OD 200, etc...) Dress the cable around the feet as shown on left. For 101 style products, use the guide on the right.

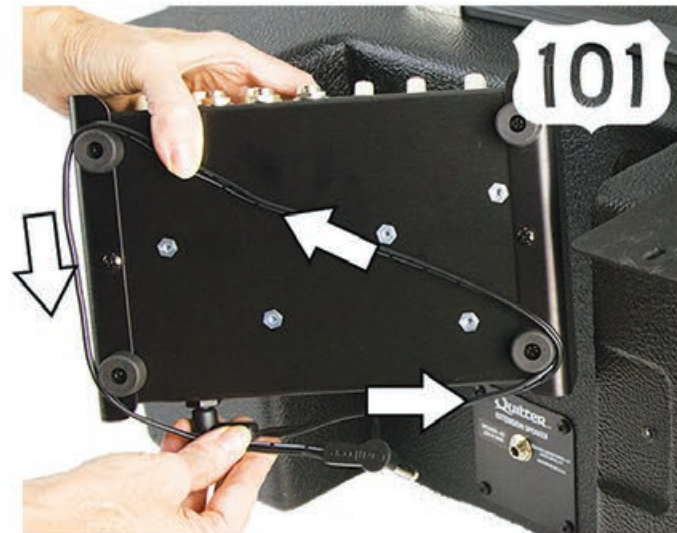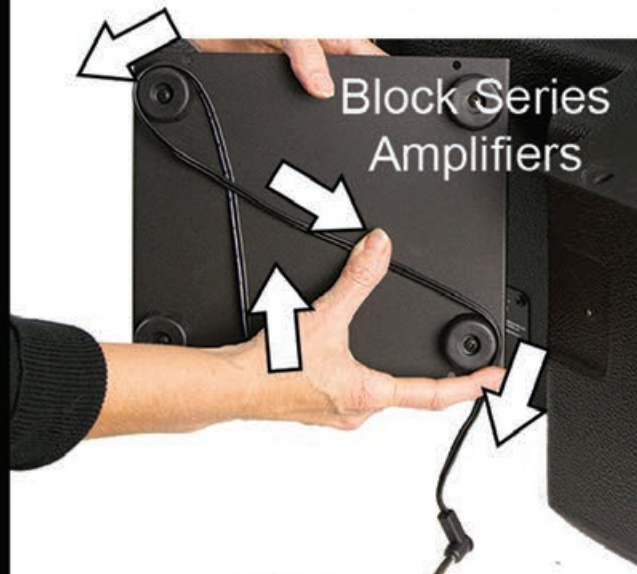

4) Position the amplifier in the mounting holes being careful not to crush the speaker cable underneath the feet of the amplifier.



5) While holding the amplifier in with the rear retainer plate, screw in the two thumbscrews on either side of the plate.



6) Plug the dangling 1/4" speaker cable into the FRONTLINER 2x8 speaker jack.



7) Plug in the A/C cable. (Note: IEC cable is different for each.)



Contents

- 1) Extension Speaker
- 2) Speaker Cable
- 3) Cover
- 4) Owner's manual

Specifications

Model: FRONTLINER 2x8

Speakers: Qty 2 Celestion TF0818 8" wired in parallel

Power Handling: 200 wRMS

Weight: 24.9 Pounds (11.29 kg)

Care and maintenance

Clean the outer surfaces with a clean, damp cloth or vacuum with a soft brush. Never use any abrasives, harsh cleaners or solvents. The FRONTLINER 2x8 is manufactured with high quality components using modern industrial processes that greatly reduce production defects. Each speaker goes through an intensive testing process before it leaves the factory ensuring that your amplifier will give you years of flawless service. There are no user-serviceable parts inside the speaker. Any repairs should be performed by a trained service professional. Always use the speaker in a well-ventilated environment and protect from external heat sources such as furnaces or direct sunlight. Prolonged high-volume playing causes heat buildup in the speaker which reduces its working lifetime.