



@neunaberaudio


POWER



9 V / 12 V
100 mA minimum


PLACEMENT

Delay sounds best before reverb and after other effects.

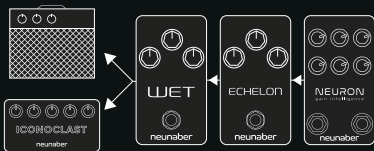

EFFECTS LOOP

When using amp's drive channel.

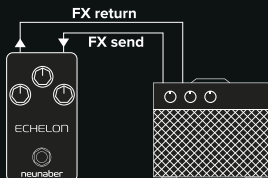

SETUP CONTROLS

Hold Engage switch while turning knob.

Bypass



Effect Select



Complete User Guide at
neunaber.net/pages/user-guides