

# NORIOTA

BUILT IN SERIES – Zero Clearance Design  
Stainless Steel Door Easily Converts to Overlay Panel Ready



Intertek  
Certified to  
ANSI-NSF 12



**NUGGET ICE**  
1.2 x 1.2 CM  
1/2 x 1/2 IN



Shown with custom wood  
overlay panel (not included)

## NUI15NOPSS

### Cabinet

|                      |                                                                                    |
|----------------------|------------------------------------------------------------------------------------|
| Cabinet Finish       | Stainless steel                                                                    |
| Door Style           | Swing, right hinged (field reversible to left hinged)                              |
| Door Panel           | Stainless steel, can be removed for installation of custom 19MM (3/4IN) wood panel |
| Handle               | 1.9CM (3/4IN) Diameter stainless steel                                             |
| Hinge                | Stainless steel with built-in door close assist to ensure door closure             |
| Maximum Door Opening | 135°, door and handle will not hit adjacent cabinetry                              |
| Interior Color       | White                                                                              |
| Interior Light       | 3 Colour LED : white / blue / amber                                                |
| Door Gasket          | Black, magnetic and replaceable                                                    |

### Electrical Data

|                                   |                       |
|-----------------------------------|-----------------------|
| Electrical Requirements           | 115V/60Hz / 1Ph / 15A |
| Voltage Range                     | 104V - 127V           |
| Rated Current Ice Making /Harvest | 3.3A/2.1A             |
| Power Cord Length                 | 180CM (6')            |
| Plug Type                         | NEMA5-15P             |

### Warranty


5-year compressor, 1-year parts and labour

### FEATURES & BENEFITS

- **Door is Both Stainless Steel or Overlay Panel Ready:** Allows for custom 1.9CM (3/4IN) panel overlays, giving you the flexibility to match your cabinetry or use the included stainless steel door
- **Rated for Outdoor Use:** Upgraded components and full stainless steel exterior that looks great with exceptional performance both indoors and outdoors
- **Zero-Clearance Design:** Achieves seamless, flush integration into any built-in setting, ensuring a clean, custom look
- **Soft Chewable Nugget Ice:** Produces up to 27.2Kg (60Lb) per day of nugget ice pellets - soft, crunchy, and perfectly chewable, transforms every sip into a refreshing, satisfying experience
- **Advanced Controller and Internal LED:** Actively manages the ice making process, sends alerts for cleaning and filter replacement, switch between 3 colors of lighting
- **Integrated Water Filter:** Removes impurities and improves taste, easy to replace

INDOOR / OUTDOOR NUGGET ICE MAKER - 15 IN

| Technical Data                                                                    |                                                                                                         |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|
| Max. Ice Production - Air Temperature 21°C (70°F) / Water Temperature 10°C (50°F) | 27.2Kg (60Lb) Per Day                                                                                   |
| Ice Storage Capacity                                                              | 12Kg (26Lb) in Insulated Bin                                                                            |
| Controls                                                                          | Advanced diagnostic digital LED controller with auto clean and alert functions                          |
| Sabbath Mode                                                                      | Yes                                                                                                     |
| Refrigerant                                                                       | R290                                                                                                    |
| Operating Requirements                                                            |                                                                                                         |
| Energy Usage Per 45.5Kg (100Lb) of Ice Produced                                   | 8.57 kWh                                                                                                |
| Water Usage Per 45.5Kg (100Lb) of Ice Produced                                    | 47.7L (12.6 Gallons)                                                                                    |
| Ambient Temp. Operating Range                                                     | 10°C to 38°C (50°F to 100°F)                                                                            |
| Water Temp. Operating Range                                                       | 4.4°C to 32°C (40°F to 90°F)                                                                            |
| Water Pressure Operating Range                                                    | 20 – 80 PSI (0.138MPa~0.55MPa)<br>(Above 80 requires a regulator)                                       |
| Installation                                                                      |                                                                                                         |
| Installation type                                                                 | Built-in or freestanding                                                                                |
| Anti-tip Bracket                                                                  | Not required                                                                                            |
| Built-In Installation Type                                                        | Inset, frameless - Overlay and framed cabinet styles                                                    |
| Ventilation                                                                       | Front breathing - No additional clearance required around the sides, minimal clearance required in rear |
| Water Inlet Connection                                                            | 1/4" Compression fitting                                                                                |
| Drain Connection                                                                  | Required                                                                                                |
| Factory Installed Drain Pump                                                      | Yes                                                                                                     |
| Integrated Water Filter                                                           | Yes, replace from front                                                                                 |
| Dimensions                                                                        |                                                                                                         |
| Unit Dimensions (Including Feet and Hinge)                                        | 37.8 x 62.1 x 85.5-88 CM<br>(14.9 x 24.5 x 33.6-34.6 IN)                                                |
| Net Weight                                                                        | 40Kg (89Lb)                                                                                             |
| Toe Kick Height                                                                   | 7.6 CM (3 IN)                                                                                           |
| Adjustable Leveling Feet                                                          | 1.6-4.2 CM (0.6-1.7 IN)                                                                                 |
| Shipping Dimensions                                                               | 46.1 x 71 x 96.5 CM<br>(18.1 x 28 x 38 IN)                                                              |
| Shipping Weight                                                                   | 47Kg (103Lb)                                                                                            |
| Cut-Out Dimensions                                                                | 38.1 x 61 x 85.5-88 CM<br>(15 x 24 x 33.7-34.7 IN)                                                      |
| Accessories Included                                                              |                                                                                                         |
| Ice scoop with holder, drain hose 152.4CM (60 IN)                                 |                                                                                                         |

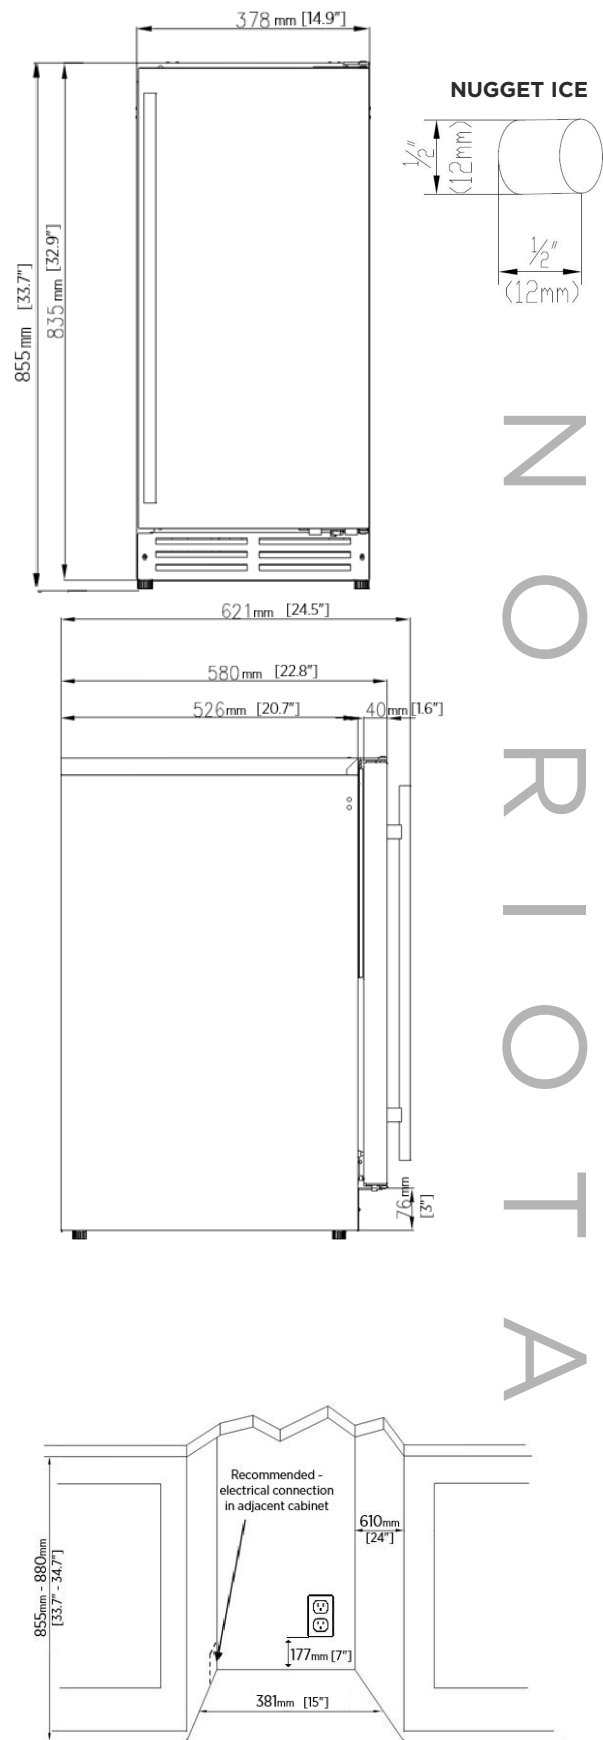

NORIOTA