
## Derby

## **Assembly Instruction For Derby Chair**

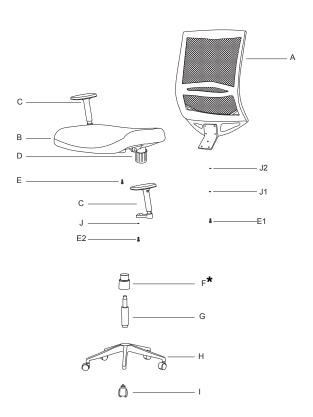

PARTS LIST:	
A. BACK CUSHION	1 PC
B. SEAT CUSHION	1 PC
C. ARM RESTS (LEFT & RIGHT)	1 PR
D. MECHANISM	1 PC
E. SCREWS FOR MECHANISM (1/4"*6/8")	4 PCS
E1. SCREWS FOR BACK SUPPORT (M8*20MM )	3 PCS
E2. SCREWS FOR ARMRESTS (1/4" *1-1/8")	6 PCS
F. GAS LIFT COVER*	1 PC
G. GAS LIFT	1 PC
H. 5-STAR BASE	1 PC
I. CASTERS	5 PCS
J. Φ15MM WASHER	6 PCS
J1. SPRING WASHER	3 PCS
J2. Φ19MM WASHER	3 PCS

## **INSTRUCTIONS**

- Carefully unpack all parts and identify them with parts list before attempting to assemble
- 2. Attach both LEFT AND RIGHT ARM RESTS (C) to SEAT CUSHION (B) by using 6 SCREWS (E2) with 6 WASHERS(J)
- Attach BACK CUSHION (A) into the gap between MECHANISM (D) and SEAT CUSHION (B), then fix them by using 3 SCREWS (E1) with 3 SPRING WASHER(J1) and 3 WASHER(J2)
- 3. Put 5 CASTERS (I) into the holes on 5-STAR BASE (H)
- 4. Insert the pre-assembled seat unit onto gas lift to finish assembly

## NOTES

\* Gas Lift Cover only applies to Derby Black, not Grey & White task chairs
Remove all wrapping materials, including staples and packing straps before you start to assemble.
Keep all hardware parts out of reach of children.

