


SEISMIC SCCSMP 4 AND 6 MOVEMENT 1



DESIGN

- A) Tube 321 Stainless Steel
- B) Braid 304 Stainless Steel
- C) Ends: C.S. Male Pipe Thread
- Misc.: C.S 90
- Temp: 700 Degrees F

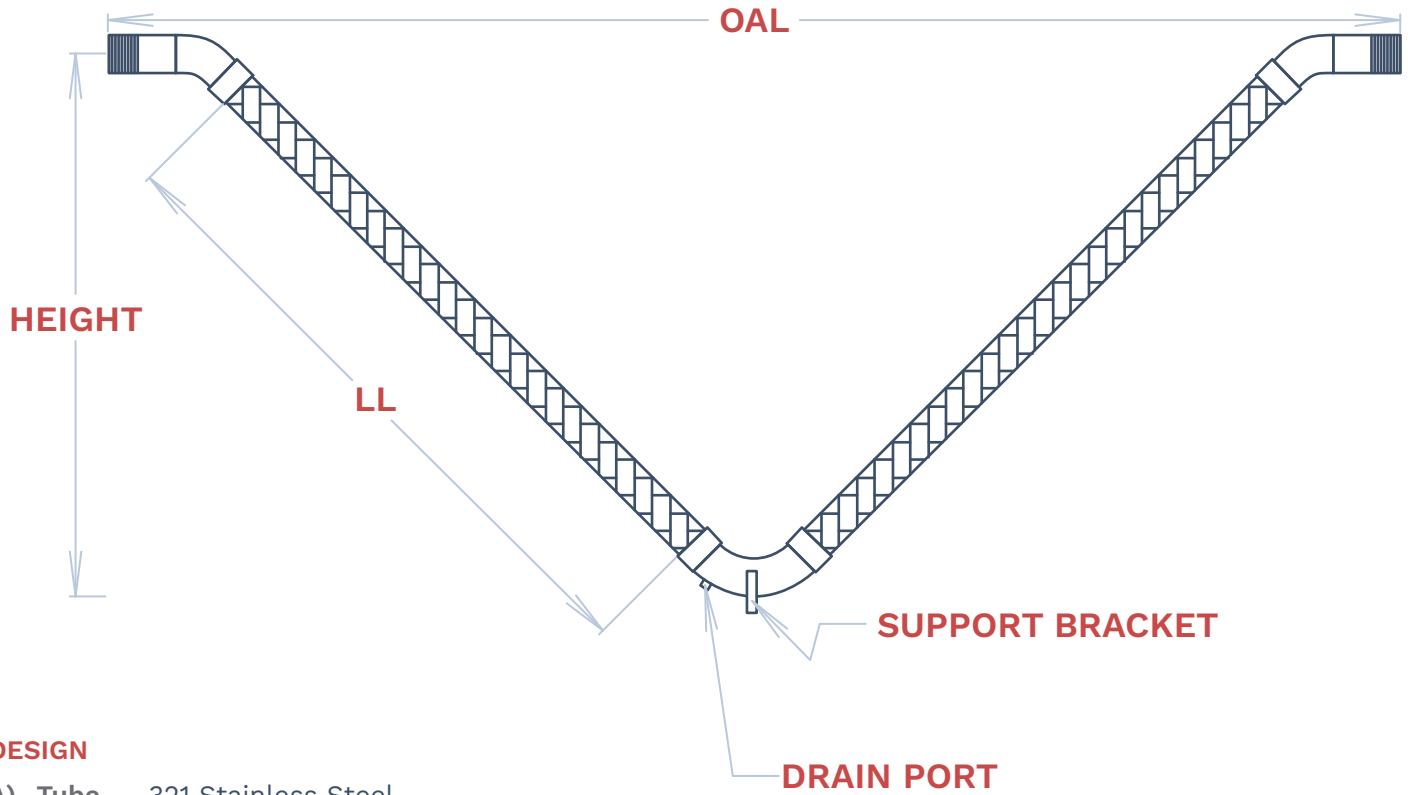

Part Number	Nom. Hose size	Pressure @ 70 F	-4.0MVT (4.0 Inch Movement)			-6.0MVT (6.0 Inch Movement)		
			OAL	HEIGHT	LL (Live Length)	OAL	HEIGHT	LL (Live Length)
SC050CSMP-	.50	1100	29.00	12.21	14.40	35.50	15.46	19.00
SC075CSMP-	.75	898	32.63	14.10	16.70	39.56	17.56	21.60
SC100CSMP-	1.00	718	36.95	15.89	18.80	44.31	19.57	24.00
SC125CSMP-	1.25	645	39.72	17.14	20.00	47.50	21.02	25.50
SC150CSMP-	1.50	531	42.56	18.37	21.20	50.05	22.11	26.50
SC200CSMP-	2.00	449	48.57	21.51	23.30	57.02	24.80	29.40
SC250CSMP-	2.50	400	58.52	25.09	28.80	68.71	30.18	36.00
SC300CSMP-	3.00	288	68.80	29.89	34.90	80.71	35.75	43.30
SC400CSMP-	4.00	250	78.11	33.34	37.50	90.84	39.70	46.50