


STYLE SEISMIC V-LOOP DATA SHEET

MATERIAL:

Hose: 316 Stainless Steel
 Braid: One Braid 304 Stainless Steel
 End Fitting: Carbon Steel Male Pipe
 90/45 Fitting: Carbon Steel SCH 40

CHARACTERISTICS:

GSC-CSMP style Seismic V connectors are CGA/AGA listed and certified to meet UI-536 flexible metal connectors for use with flammable and combustible gases and liquids.

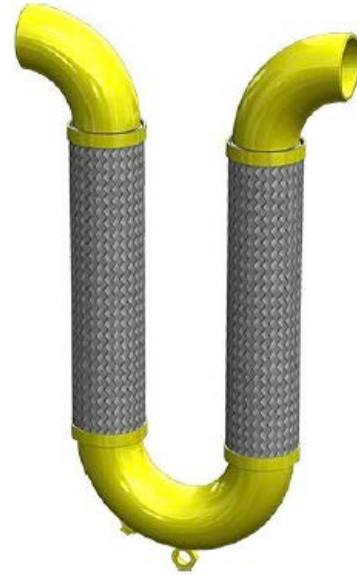

| Size | Movement | OAL | Height | Pressure @ 70F | Weight LBS |
|------|------------|-------|--------|----------------|------------|
| 0.50 | + / - 4.0" | 15.00 | 18.00 | 150 | 19 |
| 0.75 | + / - 4.0" | 16.00 | 20.00 | 150 | 29 |
| 1.00 | + / - 4.0" | 16.00 | 22.00 | 150 | 44 |
| 1.25 | + / - 4.0" | 16.75 | 22.00 | 150 | 59 |
| 1.50 | + / - 4.0" | 17.50 | 23.00 | 150 | 99 |
| 2.00 | + / - 4.0" | 14.00 | 25.00 | 150 | 150 |
| 2.50 | + / - 4.0" | 15.50 | 26.00 | 150 | 287 |
| 3.00 | + / - 4.0" | 18.00 | 29.00 | 150 | 296 |
| 4.00 | + / - 4.0" | 24.00 | 37.00 | 150 | 325 |