


F18



TECEx RoHS


Versions



35' 2/4" / 902 mm

2 group


- 2 steam taps
- 1 water tap
- 1 one-cup filter holder
- 2 two-cup filter holders

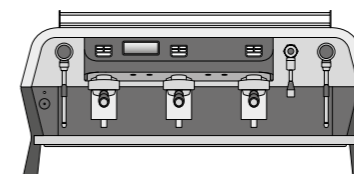

42' 1/4" / 1072 mm



3 group

- 2 steam taps
- 1 water tap
- 1 one-cup filter holder
- 3 two-cup filter holders

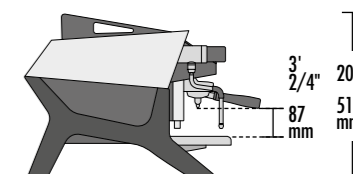


25' 2/4" / 646,5 mm

3' 2/4" / 87 mm
20" / 511 mm

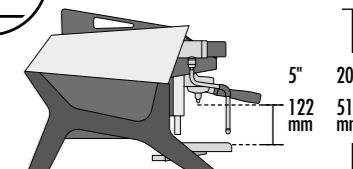

5" / 122 mm
20" / 511 mm

TALL VERSION

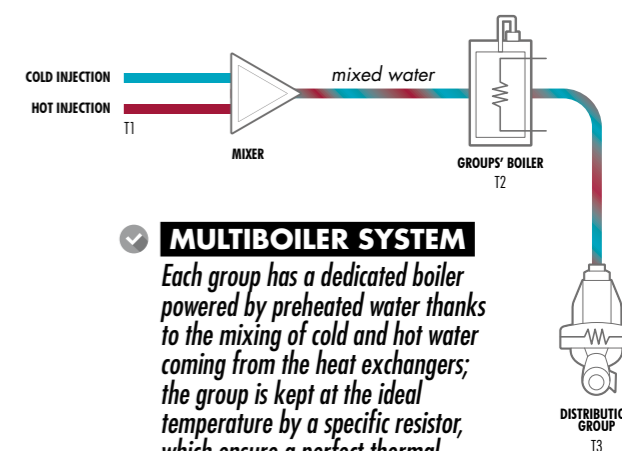

MULTIBOILER SYSTEM

Each group has a dedicated boiler powered by preheated water thanks to the mixing of cold and hot water coming from the heat exchangers; the group is kept at the ideal temperature by a specific resistor, which ensure a perfect thermal regulation.



Technical data

		2 group	3 group
voltage	V	220-240 1N	380-415 3N
power input	kW	5.4	6.1
steam boiler capacity	lt	8.6	10
steam boiler power	kW	3.5	3.5
pump power	kW	0.15	0.15
boiler capacity	lt	1	1.5
boiler element power	kW	1	1.5
cup-heater power	kW	0.2	0.25
net weight	lb / kg	182 / 82.5	222.5 / 101
gross weight (with shipping crate)	lb / kg	241.5 / 109.5	278 / 126

Colours

	Matte black	RAL 9005
	White Matte black	RAL 9003 9005
	Blue Matte black	RAL 5024 9005



QUICK STEAM COUPLING

The new half-turn knob allows extreme precision limiting physical stress



ENERGY SAVING SYSTEM

Component insulation and smart electronics for maximum energy efficiency



STAINLESS STEEL "COLD TOUCH"

Anti-burning feature fitted with "Latte Art" high-performance steam terminals



F18
Download the catalog

REALTIME STABILITY GROUP

Exclusive Sanremo design that allows an accurate maintenance of the set temperature



REALTIME STABILITY

Constancy in the electronic controlled temperature ($\pm 0.2^\circ\text{C}$)

In flight stability

Ready to take off




OPERATION ALARM MANAGEMENT


Dedicated menu for malfunction and alarm records

SOFT PRE-INFUSION

Flowactive System: for precise control of the water flow and pre-infusion time



Control panel:

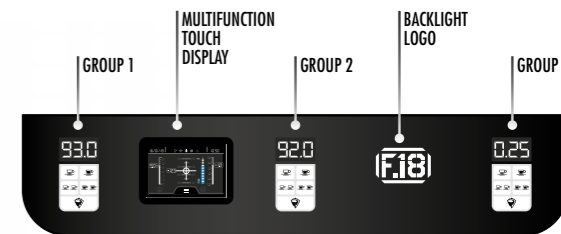

Keyboard 5 selections standard



TEMPERATURE AND EXTRACTION TIME



4 PROGRAMMABLE DOSES




CONTINUOUS DELIVERY / GROUP FLUSHING




5/6 PROGRAMMABLE DOSES

Keyboard 7 selections optional



MULTIFUNCTION TOUCH DISPLAY

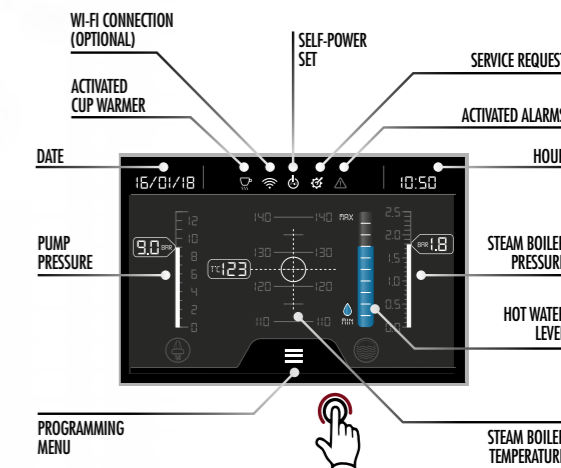

Characteristics

- MIXED INFUSION HOT WATER FOR TEA AND HERBAL TEAS**
Immediate mixing of cold / hot water for a better chemical and organoleptic quality.
- STATIC RELAY BOILER TEMPERATURE**
Allows to regulate the temperature as accurately as possible.
- STAINLESS STEEL COFFEE BOILER**
Guarantees excellent stability and thermal precision, associated with resistance to oxidation and limestone.
- INDEPENDENT REGULATION TEMPERATURE WATER COFFEE**
Maximum temperature precision and constancy of distribution.
- PROGRAMMABLE ELECTRONIC PRE-INFUSION**
Allows control with 0.1 second tolerance of the flow of water that wets the coffee bed, with programming of 4 different profiles for each group.
- AISI 316L STAINLESS STEEL STEAM WAND "COLD TOUCH"**
Anti-burning feature even in conditions of prolonged use, fitted with "Latte Art" high-performance steam terminals.
- PROGRAMMABLE CUP WARMER TEMPERATURE**
Allows the cups to be kept at the optimum temperature in the most different climatic conditions.

- LED LIGHTING OF THE WORK AREA**
Allows efficient working in any condition of environmental lighting.
- AUTO-ON, AUTO-OFF AND DAY-OFF FUNCTION**
Programmable on-off timer for each day and/or daily timetables.
- ENERGY SAVING SYSTEM**
Component insulation and smart electronics for maximum energy efficiency.
- REALTIME STABILITY GROUP**
Exclusive Sanremo design that allows a precise maintenance of the set temperature.

- EASY SERVICE**
Fast access to the internal parts for quick and easy technical service.
- AUTOMATIC CLEANING CYCLE**
Process for coffee groups cleaning.
- HIGH PERFORMANCE VOLUMETRIC PUMP**
Pressure stability also with prolonged and contemporary use of more than one group.
- COMPETITION FILTERS**
Exclusive Sanremo design, with shape and volume designed to capture the best coffee aromas and fragrances.

- TEMPCONTROL**
For a very-high thermal stability ($\pm 0.2^\circ\text{C}$).
- GROUP FLUSHING**
With a simple pressure of the button a small quantity of water is dispensed to allow the group to be always clean.
- Optional**
- AUTOSTEAMER**
Steam wand characterized by an electronic system that allows to mount and/or heat milk at the set temperature.

- EXTERNAL VOLUMETRIC PUMP**
- HIGH POWER STEAMER TERMINAL**
(bigger holes diameter)
- STAINLESS FILTER HOLDERS**
- STEAM CONTROL ADJUSTABLE ELECTRONIC PRESSURE SWITCH**
Sensor with 0.02 bar precision that allows the chosen pressure and steam in the boiler to be kept constant in all conditions of use.