



Presented By: ELECTROMA S.A
Contact Phone: 2207-3838
Contact E-mail:

Customer Name:
Project Name:
Fixture Type:



85381 - LU250/D/H/ECO

GE Ecolux® Lucalox® High Pressure Sodium ED28

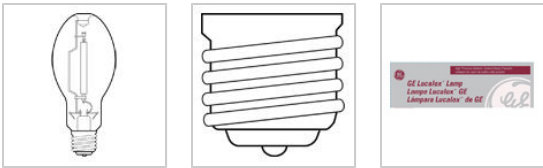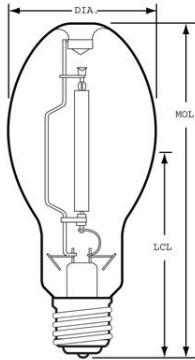

GENERAL CHARACTERISTICS

| | |
|----------------------------|--|
| Lamp Type | High Intensity Discharge - High Pressure Sodium ED28 |
| Bulb | ED28 |
| Base | Mogul Screw (E39) |
| Bulb Finish | Diffuse |
| Rated Life (NOM) | 24000.0 h |
| Bulb Material | Hard glass |
| Lamp Enclosure Type (LET) | Open or enclosed fixtures |
| Base Temperature (MAX) | 210.0 °C |
| Mercury Content (NOM) | 16.4 mg |
| Picograms of Mercury (NOM) | 29.2 pg |
| Additional Info | TCLP compliant |

PHOTOMETRIC CHARACTERISTICS

| | |
|---------------------------------------|----------|
| Initial Lumens (NOM) | 26000.0 |
| Mean Lumens (NOM) | 23400.0 |
| Nominal Initial Lumens per Watt (NOM) | 104.0 |
| Color Temperature (NOM) | 2100.0 K |
| Color Rendering Index (CRI) (NOM) | 22.0 |

ELECTRICAL CHARACTERISTICS

| | |
|-------------------------------|----------------------------|
| Wattage (NOM) | 250.0 |
| Burn Position | Universal burning position |
| Warm Up Time to 90% (NOM) | 3.0 min |
| Hot Restart Time to 90% (NOM) | 1.0 min |

DIMENSIONS

| | |
|------------------------------------|--------------------|
| Maximum Overall Length (MOL) (NOM) | 9.000 in(228.6 mm) |
| Bulb Diameter (DIA) (MAX) | 3.500 in(88.9 mm) |
| Light Center Length (LCL) (NOM) | 5.000 in(127.0 mm) |

PRODUCT INFORMATION

| | |
|----------------------------|----------------|
| Product Code | 85381 |
| Description | LU250/D/H/ECO |
| ANSI Code | S50 |
| Standard Package | Case |
| Standard Package GTIN | 10043168853818 |
| Standard Package Quantity | 12 |
| Sales Unit | Case |
| No Of Items Per Sales Unit | 1 |
| No Of Items Per Standard | 12 |
| Package | |
| UPC | 043168853811 |