

Presented By: ELECTROMA S.A
Contact Phone: 2207-3838
Contact E-mail:



Customer Name:
Project Name:
Fixture Type:



44058 - LU1000/ECO

GE Ecolux® Lucalox® High Pressure Sodium E25

- Passes TCLP, which can lower disposal costs.

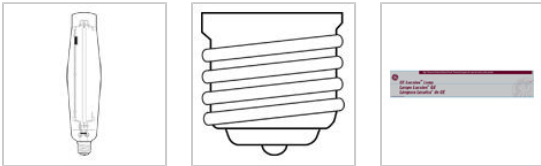

CAUTIONS & WARNINGS

Caution

- Lamp may shatter and cause injury if broken
 - Dispose of lamp in a closed container.
 - Do not use excessive force when installing lamp.
 - Do not use lamp if outer glass is scratched or broken.
 - Wear safety glasses and gloves when handling lamp.

Warning

- Contains sodium – chemical burn risk
 - Avoid skin contact with broken pieces.
- Risk of Burn
 - Allow lamp to cool before handling.
 - Do not turn on lamp until fully installed.
- Risk of Fire
 - Keep combustible materials away from lamp.
 - Use in fixture rated for this product.
- Risk of Electric Shock
 - Do not use where directly exposed to water or outdoors without an enclosed fixture.
 - Turn power off before inspection, installation or removal.
 - Use in fixture approved for this product.
- Unexpected lamp rupture may cause injury, fire, or property damage
 - Do not exceed rated voltage.
 - Do not store flammable materials near/below lamp.
 - Do not use where directly exposed to water or outdoors without an enclosed fixture.
 - Use only properly rated ballast.
 - Do not turn on lamp until fully installed - Do not use lamp if outer glass is scratched or broken.

GRAPHS & CHARTS

Graphs_Spectral Power Distribution

GENERAL CHARACTERISTICS

Lamp Type	High Intensity Discharge - High Pressure Sodium
Bulb	E25
Base	Mogul Screw (E39)
Bulb Finish	Clear
Rated Life (MIN)	24000.0 h
Rated Life (NOM)	24000.0 h
Bulb Material	Hard glass
Lamp Enclosure Type (LET)	Open or enclosed fixtures
Mercury Content (NOM)	24.75 mg
Picograms of Mercury (NOM)	8.8 pg
Additional Info	TCLP compliant

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	130000.0
Mean Lumens (NOM)	117000.0
Nominal Initial Lumens per Watt (NOM)	130.0
Color Temperature (NOM)	2100.0 K
Color Rendering Index (CRI) (NOM)	22.0
Effective Arc Length (NOM)	8.74 in

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	1000.0
Burn Position	Universal burning position
Open Circuit Voltage (RMS lag ballast) (MIN)	456.0 V
Warm Up Time to 90% (MIN)	3.0 min
Warm Up Time to 90% (MAX)	4.0 min
Warm Up Time to 90% (NOM)	3.0 min
Hot Restart Time to 90% (MAX)	1.0 min

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	15.060 in(382.5 mm)
Nominal Length (NOM)	15.060 in(382.5 mm)
Bulb Diameter (DIA) (NOM)	3.125 in(79.4 mm)
Light Center Length (LCL) (NOM)	8.750 in(222.2 mm)

PRODUCT INFORMATION

Product Code	44058
Description	LU1000/ECO
ANSI Code	S52
Standard Package	Case
Standard Package GTIN	10043168440582
Standard Package Quantity	6
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	6
UPC	043168440585

