


FT-CP CANOPY SERIES

EXTERIOR LUMINAIRES

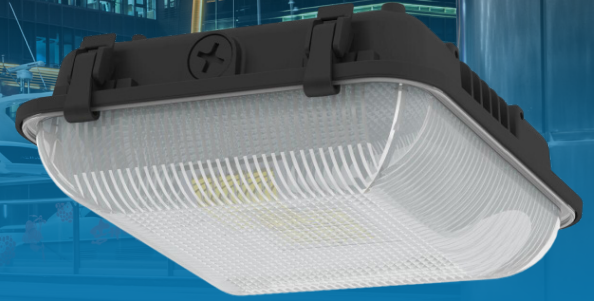

Fotonz's Canopy Light is a more elegant and much thinner replacement for the older Metal halide and HPS canopy lights.

This offers high-quality chips and drivers with die-cast aluminum housing to provide high-quality lighting. Housing is completely sealed against moisture and environmental contaminants. This is designed in a way that the lens enables the high distribution of the light and eliminates maximum glare from the fixture.



DIE-CAST ALUMINUM HOUSING

Fotonz's LED Luminaires provide a sturdy body that stands high wear and tear while keeping the fixtures as light as possible.



EFFICIENT HEAT DISSIPATION

The LED Canopy are designed to dissipate maximum heat away from the LED chips and drivers to ensure Long Working Lifespan.



UNIFORM ILLUMINATION

The Clear Lens provides high light transmission, uniform illumination and won't haze over time.



DUAL VOLTAGE (120V to 347V)

Fotonz's LED Canopy supports 120V to 347V, making our fixtures the ideal choice for old and new buildings

ORDERING GUIDE

FT - CP48 - 4K - UH - PC

	MODEL NUMBER	COLOUR TEMP	VOLTAGE	OPTIONAL CONTROL
	CP30 30W/4000LM	4K 4000K(Standard)	U 120-277V	PC Photocell
	CP48 48W/6300LM	5K 5000K(By Order)	UH 120-347v	D 0-10DVC
	CP70 70W/8500LM			MS Motion Sensor

PROJECT:

TYPE:

NOTES:

TECHNICAL SPECIFICATIONS

CONSTRUCTION

- Die-cast Aluminum Housing
- Bronze housing color (other colors by order)

INSTALLATION

- 7 minute Easy Installation
- Three different mounting option (Rigid Conduit, Conduit Mount and Surface Mount)

ELECTRICAL

- "U" models has operating voltage of 120-277V
- "UH" models has operating voltage of 120-347V
- Surge Protection - LED drivers have up to 6kV
- Power Factor >0.9
- CRI > Ra 70
- 0-10V dimming
- 130 lm/W Efficacy
- Operating Temperature of -40°C - 40°C

LISTINGS & RATINGS



- cETLus
- DLC listed
- Wet Location
- IP65
- Rated Lifetime of L70 50,000 hrs

WARRANTY


5 years Limited Warranty

DIMENSIONS

Length 1 (L1)	10.2"	26CM
Length 2 (L2)	10.2"	26CM
Height 1 (H1)	3.5"	09CM

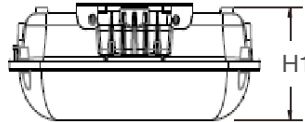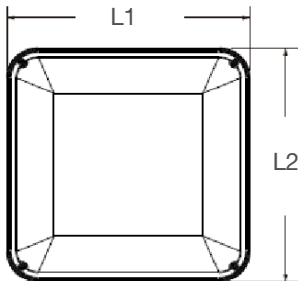

ILLUMINANCE CHART

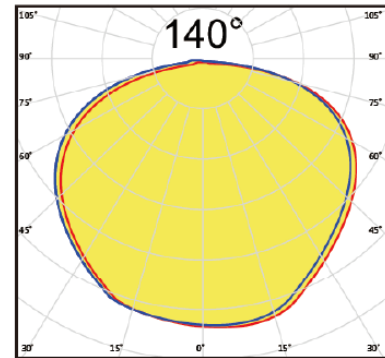

APPLICATIONS


- Parking Garages
- Gas Stations
- Commercial store/plaza fronts
- Building entryways
- Loading docks

DLC PRODUCT ID


FT-CP30-4K-U	PL6G5QHW
FT-CP48-4K-U	PV9LWAK1
FT-CP70-4K-U	PVZ5TJOL
FT-CP30-4K-UH	PPRF1YWD
FT-CP48-4K-UH	PV4D42ZK
FT-CP70-4K-UH	PEMEMWT6

MOUNTING OPTION

Rigid Conduit

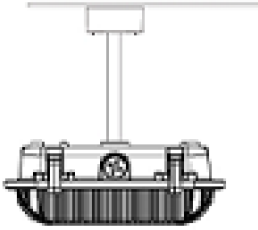

Surface Mount



Conduit Mount

