

Hexagon Frame - Direct


Architectural Surface / Suspended Luminaire



PROJECT: TYPE: DATE:

NOTES:

Specification grade architectural round fixtures deliver minimalistic and distinctive lines that are able to endorse any design of hospitality, dealership and commercial space.

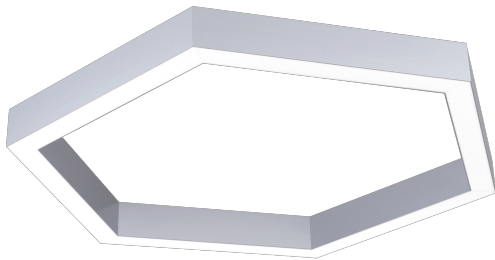

- Available from 19" to 48" diameter
- Lumens from 2,625LM to 4,200LM
- Low profile housing 3" height
- Extruded aluminum housing
- 90+ CRI
- Suspended & surface mount



WHITE



BLACK



CUSTOM



ORDERING GUIDE Example: HEXFD-2440-40K-U-DM-90-WH-WH-SW

MODEL	SIZE/LUMENS	COLOUR TEMP.	VOLTAGE	DIMMING	CRI	FINISH	CANOPY FINISH
HEXFD	1925 19" 2,625LM	27K 2700K	U 120V-277V	DM 0-10V	90 90+ CRI	WH White	WH White
	2440 24" 4,200LM	30K 3000K	UEB 120V-277V W/ Emergency Backup			BK Black	BK Black
	3690 36" 9,450LM	35K 3500K				Custom Specify Ral#	Custom Specify Ral#
	48180 48" 18,900LM	40K 4000K				Example: GR Grey (RAL#9006)	Example: GR Grey (RAL#9006)

MOUNTING OPTION

—

SW

Suspended wire

SC

Suspended canopy

SM

Surface mount

Suspended Cable Length

ST- Standard 5ft (60" 1500mm)

Suspended Power Cable Length

ST- Standard 5ft (60" 1500mm)

Surface Mount Power Cable Length

ST- Standard 1ft (11.8" 300mm)

*Phase dimming Triac/ELV: Available
Please contact manufacture

Hexagon Frame - Direct

Architectural Surface / Suspended Luminaire



SPECIFICATION

Construction

Extruded aluminum housing
Polycarbonate lens

Electrical

0-10V dimming: 100%-10%
Power factor >0.9
Integral Driver or Remote Driver v

LED System

Available in 2700K, 3000K, 3500K, 4000K
CRI 90+
Sustainable LED modules

Beam Angle

120°

Emergency Battery

Optional Emergency output
5 watts for 90 minutes

Finish

Standard: Polyester powder coat white,
black or custom finish (Specify RAL#)
Example: Grey RAL#9006

Environment

Suitable for dry or damp locations
Indoor use only
-20°C to 40°C (-4°F to 104°F)


Certificates

ETL and cETL.
Rated Lifetime of L70 50,000+ hrs


Warranty

5 year limited parts warranty


DIMENSIONS

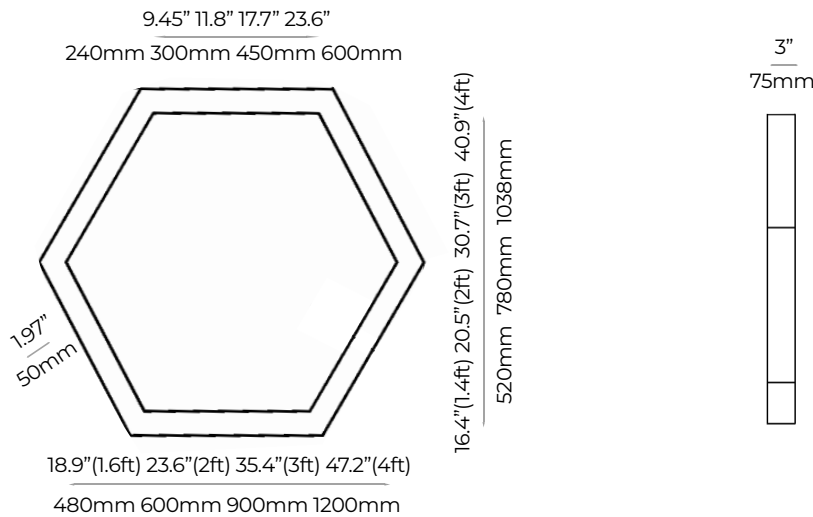

MOUNTING OPTIONS



SW
Suspended wire



SC
Suspended canopy



SM
Surface mount

Hexagon Frame - Direct

Architectural Surface / Suspended Luminaire



TECHNICAL INFORMATION

Model	Fixture Dimension (Dia x Width)		Total		# of Sections	Canopy Diameter (Suspended)	
	feet	inch	Lumens	Wattage		inch	mm
1925	1.6ft	18.9 x 3.0	2,625	25	1	9.8	250
2440	2ft	23.6 x 3.0	4,200	40	1	9.8	250
3690	3ft	35.4 x 3.0	9,450	90	1	9.8	250
48180	4ft	47.2 x 3.0	18,900	180	1	9.8	250

DISTRIBUTION & OPTICAL

