

Linear - Direct 2.67" LL5570

Architectural Luminaire



PROJECT: TYPE: DATE:

NOTES:

Specification grade architectural LED fixtures deliver minimalistic and distinctive lines that are able to endorse any design of office, dealership & commercial space.



- Available from 36" to 96"
- Lumens from 2,300LM to 6,100LM
- Smoothly even lights, no leakage
- Extruded aluminum housing
- 85 CRI, 90+ CRI optional
- Suspended & surface mount



WHITE



BLACK



GREY



ORDERING GUIDE Example: LL5570-3ft-40K-U-DM-85-GR-GR-SW

MODEL	SIZE/LUMENS	COLOUR TEMP.	VOLTAGE	DIMMING	CRI	FINISH	CANOPY FINISH
LL5570	3ft 36" 2,300LM	27K 2700K	U 120V-277V	DM 0-10V	85 85 CRI	GR Grey (RAL#9006)	GR Grey (RAL#9006)
	4ft 48" 3,100LM	30K 3000K	UEB 120V-277V W/ Emergency Backup		90 90+ CRI	WH White	WH White
	6ft 72" 4,600LM	35K 3500K				BK Black	BK Black
	8ft 96" 6,100LM	40K 4000K				Custom Specify Ral#	Custom Specify Ral#
	Custom						

MOUNTING OPTION

SW
Suspended wire

CM
Ceiling mount

WC
Wall mount

RE-TL
Recessed Trimless

RE-T
Recessed T-bar

Suspended Cable Length
ST- Standard 5ft (60" 1500mm)

Suspended Power Cable Length
ST- Standard 5ft (60" 1500mm)

Wall & Ceiling Mount Power Cable Length
ST- Standard 1ft (11.8" 300mm)

Linear - Direct 2.67" LL5570

Architectural Luminaire



SPECIFICATION

Construction

Extruded aluminum housing
Polycarbonate lens

Beam Angle

96°

Environment

Suitable for dry or damp locations
Indoor use only
-20°C to 40°C (-4°F to 104°F)

Electrical

0-10V dimming: 100%-10%
Power factor >0.9
Integral Driver Standard

Emergency Battery

Optional Emergency output
5 watts for 90 minutes

Certificates

ETL and cETL.
Rated Lifetime of L70 50,000+ hrs

LED System

Available in 2700K, 3000K, 3500K, 4000K
CRI 85, CRI 90+ optional
Sustainable LED modules




Finish

Standard: Polyester powder coat white,
black or custom finish (Specify RAL#)

Warranty

5 year limited parts warranty

DIMENSIONS

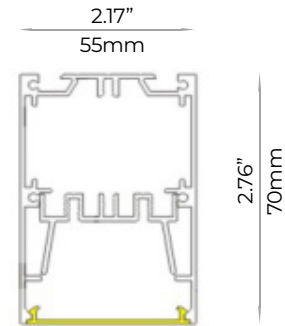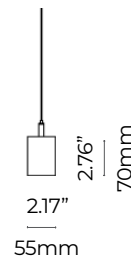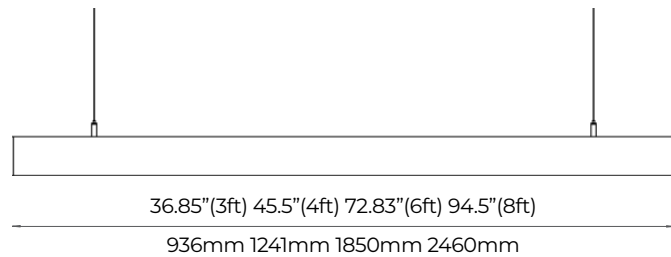

Profile

MOUNTING OPTIONS




SW

Suspended canopy




CM

Ceiling mount



WC

Wall mount



RE

Recessed Trimless/T-bar

Linear - Direct 2.67" LL5570

Architectural Luminaire






TECHNICAL INFORMATION

Size	Lumens	Wattage	lumen/W	lumen/ft	Watt/ft
3ft	2,300	23	100	775	7.8
4ft	3,100	31			
6ft	4,600	46			
8ft	6,100	61			

Based on 4000K

DISTRIBUTION & OPTICAL

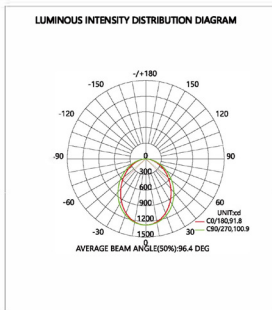

EXTENSION

