

# Sleek Tubi - 1.65" ST1616

Sleek Tubi with Integral Driver




PROJECT:  TYPE:  DATE:

NOTES:



Minimalistic specification grade architectural LED Profile delivers distinctive lines that are able to endorse any design for residential and commercial spaces.

- **Integral driver**
- 3,533 lumens per 4 foot section
- Direct, Indirect, Direct/ Indirect
- Extruded aluminum profile
- Suspended
- 83+CRI, 90+ CRI



## ORDERING GUIDE Example: LSR1616-48D-04-30K-U-DM-83-WH-WH-SC

MODEL	SIZE/LUMENS	COLOUR TEMP.	VOLTAGE	DIMMING	CRI	FINISH
Select Model from Technical Information Table on P3	<b>02</b> 24"   2,208LM	<b>30K</b> 3000K	<b>U</b> 120V-277V	<b>DM</b> 0-10V	<b>83</b> 83+ CRI	<b>WH</b> White
	<b>03</b> 36"   2,650LM	<b>40K</b> 4000K				<b>BK</b> Black
	<b>04</b> 48"   3,533LM	<b>Custom</b> 2700K 3500K				<b>GR</b> Grey (RAL#9006)
	<b>05</b> 59"   3,533LM					

CANOPY FINISH	MOUNTING OPTION
<b>WH</b> White	<b>SC</b> Suspended canopy Suspended Wire Cable & Power Cable Length <b>STSC</b> -Standard 5ft (60" 1500mm) <b>Custom length</b>
<b>BK</b> Black	
<b>GR</b> Grey (RAL#9006)	

# Sleek Tubi - 1.65" ST1616

Sleek Tubi with Integral Driver



## SPECIFICATION

### Construction

Extruded aluminum housing  
Polycarbonate lens

### Beam Angle

97°

### Certification

ETL and cETL.  
Rated Lifetime of L70 50,000 hrs

### Electrical

0-10V dimming: 100%-10%  
Power factor >0.9  
Integral Driver Standard

### Finish

Standard: Polyester powder coat white,  
black or Grey

### Warranty

5 year limited parts warranty



### LED System

Available in 3000K, 4000K  
Custom: 2700K, 3500K  
83+CRI, 90+ CRI

### Environment

Suitable for dry or damp locations  
Indoor use only  
-20°C to 40°C (-4°F to 104°F)

## DIMENSIONS

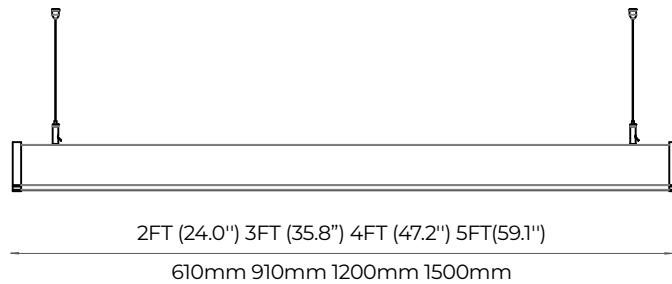

## MOUNTING OPTIONS



### SC

Suspended canopy

# Sleek Tubi - 1.65" ST1616

Sleek Tubi with Integral Driver



## TECHNICAL INFORMATION

Size	Model	Lighting			Lumens	Wattage	Lumen/W	Lumen/ft	Watt/ft
2FT (02)	24D	Direct	Direct (Downlight)	100%	2,208	25	88.3	1,104	12.5
	24ID	Indirect	Indirect (Uplight)	100%	2,208	25	88.3	1,104	12.5
	24DID	Direct / Indirect	Indirect (Uplight)	20%	442	5	17.7	221	2.5
			Direct (Downlight)	80%	1,767	20	70.7	883	10.0
			Total	100%	2,208	25	88.3	552	12.5
3FT (03)	36D	Direct	Direct (Downlight)	100%	2,650	30	88.3	883	10.0
	36ID	Indirect	Indirect (Uplight)	100%	2,650	30	88.3	883	10.0
	36DID	Direct / Indirect	Indirect (Uplight)	20%	530	6	17.7	177	2.0
			Direct (Downlight)	80%	2,120	24	70.7	707	8.0
			Total	100%	3,533	40	88.3	883	10.0
4FT (04)	48D	Direct	Direct (Downlight)	100%	3,533	40	88.3	883	10.0
	48ID	Indirect	Indirect (Uplight)	100%	3,533	40	88.3	883	10.0
	48DID	Direct / Indirect	Indirect (Uplight)	20%	707	8	17.7	177	2.0
			Direct (Downlight)	80%	2,826	32	70.7	707	8.0
			Total	100%	3,533	40	88.3	883	10.0
5FT (05)	59D	Direct	Direct (Downlight)	100%	3,533	40	88.3	883	10.0
	59ID	Indirect	Indirect (Uplight)	100%	3,533	40	88.3	883	10.0
	59DID	Direct / Indirect	Indirect (Uplight)	20%	707	8	17.7	177	2.0
			Direct (Downlight)	80%	2,826	32	70.7	707	8.0
			Total	100%	3,533	40	88.3	883	10.0

Testing based on 4000K

# Sleek Tubi - 1.65" ST1616

Sleek Tubi with Integral Driver



## DISTRIBUTION & OPTICAL

