

LED WALL PACK

EXTERIOR LUMINAIRES



Fotonz's Wall Pack Series is engineered with superior quality LED chips and drivers to provide high quality lighting.

The housing is completely sealed against moisture and environmental contaminants. Excellent heat dissipation helps to promote a long and reliable LED life. The wall pack is provided with a cut-off visor to prevent light from trespassing into neighboring properties. The Wall Pack Series is designed in a way to enable easy installation, making Fotonz's Wall Packs an ideal replacement for older high-pressure sodium and metal halide wall packs.



DIE-CAST ALUMINUM HOUSING

Fotonz's LED Luminaires provide a sturdy body that stands high wear and tear while keeping the fixtures as light as possible.



EFFICIENT HEAT DISSIPATION

The LED Wall Packs are designed to dissipate maximum heat away from the LED chips and drivers to ensure Long Working Lifespan.



UNIFORM ILLUMINATION

The Clear Glass Lens provides high light transmission, uniform illumination and won't haze over time.



DUAL VOLTAGE (120V to 347V)

Fotonz's LED Wall Pack supports 120V to 347V, making our fixtures the ideal choice for old and new buildings

ORDERING GUIDE

FT - WP40 - 4K - UH - _____

MODEL NUMBER	COLOUR TEMP	VOLTAGE	OPTIONAL CONTROL
WP40 40W/4900LM	4K 4000K	U 120-277V	PH Photocell
WP60 60W/7090LM	5K 5000K	UH 120-347V	D 0-10DVC
WP90 90W/10800LM			O Occypancy Control

PROJECT: _____

TYPE: _____

NOTES: _____

TECHNICAL SPECIFICATIONS

CONSTRUCTION

- Die-cast Aluminum Housing
- Glass Lens
- Bronze housing color

INSTALLATION

- Wall Mount
- 5 Knockouts

ELECTRICAL

- "U" models has operating voltage of 120-277V
- "UH" models has operating voltage of 120-347V
- Surge Protection - LED drivers have up to 6kV
- Power Factor >0.9
- CRI > Ra 70
- 0-10V dimming
- For "U" and "UH" Model has optional 120-347V photocell available separately
- Operating Temperature of -40°C - 55°C (-40° F to 131°F)

LISTINGS & RATINGS



- cETLus
- DLC listed
- Wet Location
- IP65
- Rated Lifetime of L70 50,000 hrs

WARRANTY


5 years Limited Warranty

DIMENSIONS

Length 1 (L1)	14.17"	36CM
Length 2 (L2)	12.99"	33CM
Width 1 (W1)	7.4"	18CM
Height 1 (H1)	9.05"	23CM

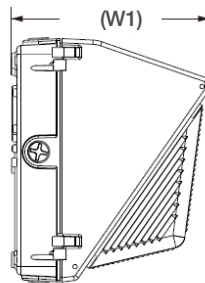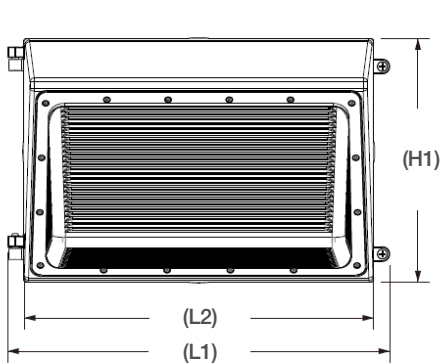

ILLUMINANCE CHART

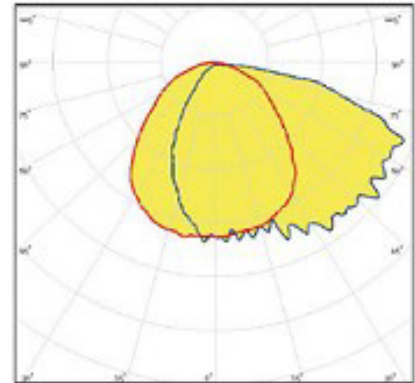



APPLICATIONS

- Commercial Building
- Driveways
- Exterior Parking
- Schools
- Hospitals

DLC PRODUCT ID

FT-WP40-4K-U	PMVKD37J
FT-WP60-4K-U	PHO2DKSH
FT-WP90-4K-U	P9P8T9UT
FT-WP40-4K-UH	P9WOKWXV
FT-WP40-5K-UH	PJMOUBX3
FT-WP60-4K-UH	P0EHQ56C
FT-WP90-4K-UH	PNXCWZNR

ACCESSORIES

IMAGE	MODEL NUMBER	DESCRIPTION
	FT-WP-VISOR	Glare Shield (Visor) to cut-off glare
	FT-WP-PHOTOCELL	Automatically turn on the luminaire when it is dark

PACKING INFORMATION

MODEL	CASE QTY/DIMENSION	PALLET QTY/DIMENSION
40W/60W/90W INNER CARTON	1PC/ 16"W x 12"D x 10"H - 9lbs	50PC/ 47"W x 40"D x 55"H - 495lbs
40W/60W/90W MASTER CARTON	2PC/ 22"W x 17"D x 11"H - 20lbs	50PC/ 47"W x 40"D x 55"H - 495lbs