




TATTU HIGH VOLTAGE VERSION

- High Energy Density Option
- Long-flight Duration
- Light Weight



Item	Voltage(V)	Dimension (±5mm)	Net Weight (±100g)	Weight Energy Density(Wh/kg)
TA-25C-11000-6S1P-HV	22.8V	176*65*56	1350	185.8
TA-15C-17000-6S1P-HV	22.8V	193*77*60	1847	209.9
TA-25C-23000-6S1P-HV	22.8V	207*90*62	2473	212.1
TA-10C-25000-6S1P-HV	22.8V	207*91*65	2577	221.2
TA-10C-32000-6S1P-HV	22.8V	216*125*61	3494	208.8
TA-10C-40000-6S1P-HV	22.8V	258*123*62	4080	223.5

Discharge Curve @ 0.5C

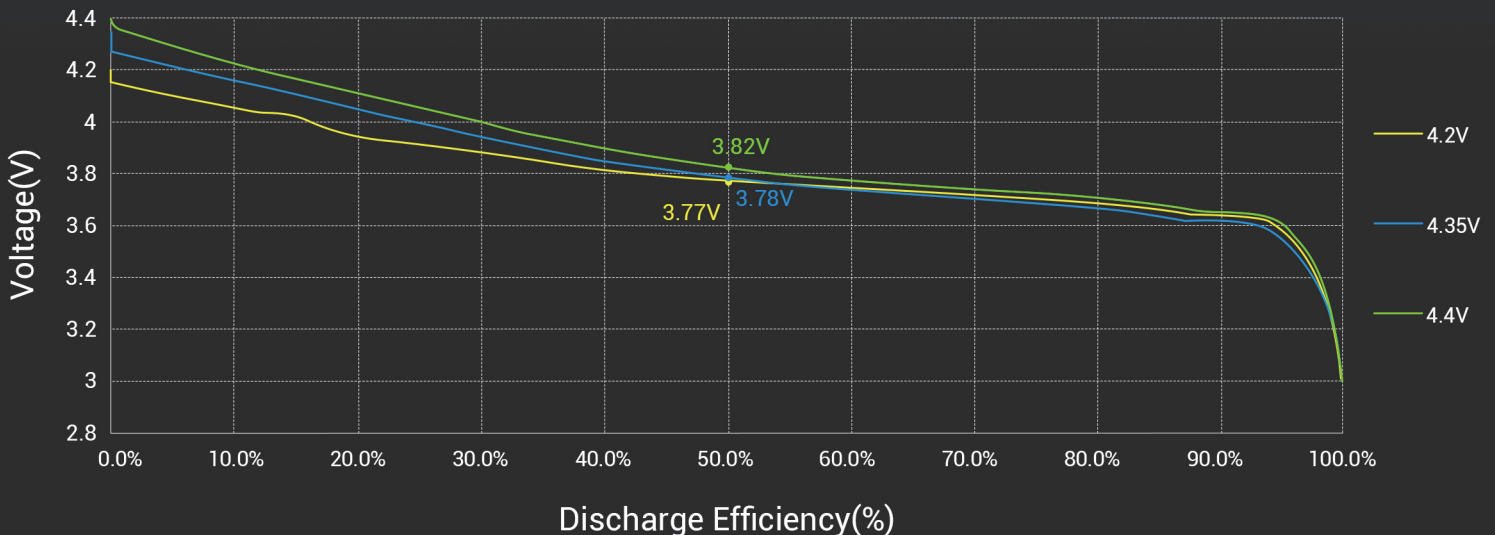




China Headquarter:
www.grepow.com


USA Office:
www.genstattu.com


Germany Office:
www.gensace.de

TATTU LOW-TEMPERATURE VERSION


- Wide Operation Temperature Range: -30°C – 60°C
- Support Max.3C Discharge at -30°C

Note: Discharge efficiency varies at different operation temperature ranges.


Item	TA-30C-14500-6S1P-XT90-S-LT
Voltage (V)	22.2V
Dimension ($\pm 5\text{mm}$)	195*77*68
Net Weight ($\pm 100\text{g}$)	1920
Weight Energy Density (Wh/kg)	167.2



157W Discharge Curve@ -10°C

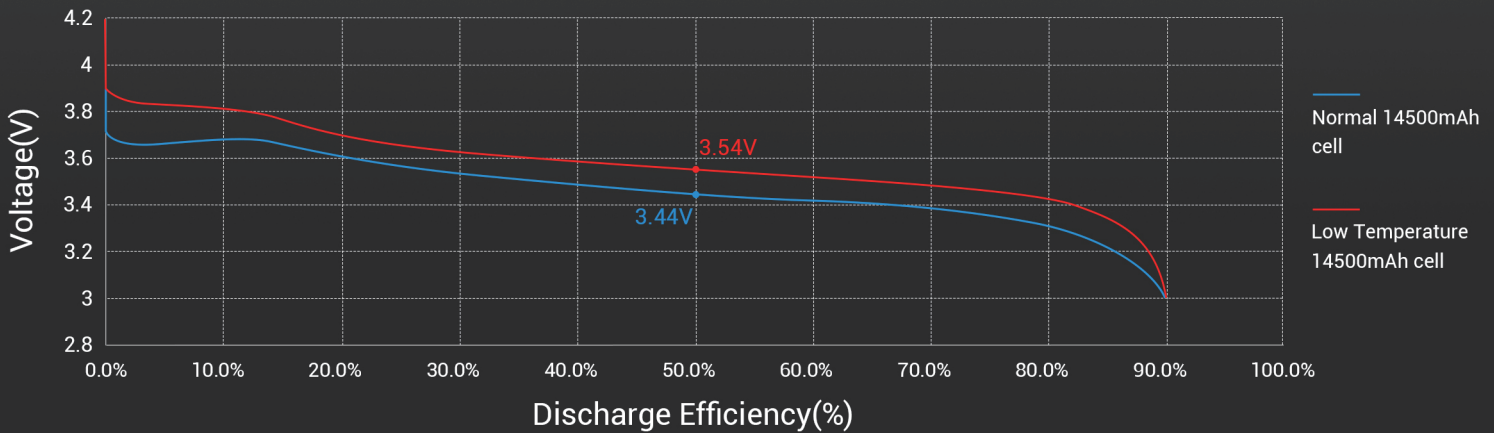

157W Discharge Curve@ -30°C

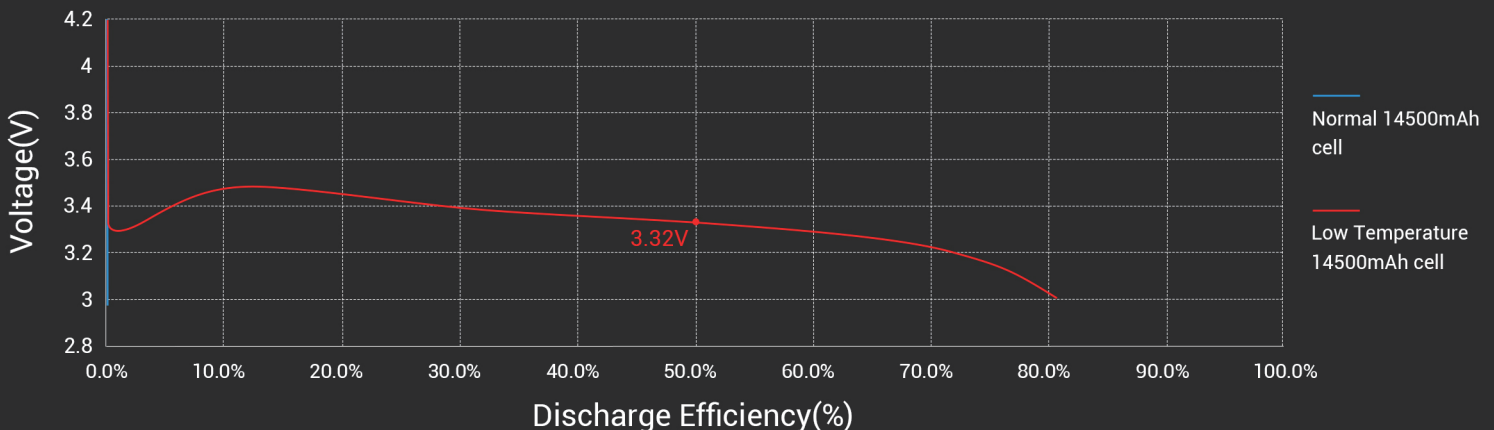

Improved battery material design to support discharge at low temperature.