

NEOLITH

FINE





24"x24" Field Tile in Crystal Gray









AVAILABLE IN:

9mm Field Tiles			
SIZE	FINISH		COLORS
3"x12"	Polished		Bedrock Beige Crystal Gray Mineral Umber
12"x24"	Matte Polished		Bedrock Beige Crystal Gray Mineral Umber
24"x24"	Matte Polished		Bedrock Beige Crystal Gray Mineral Umber
24"x48"	Polished		Bedrock Beige Crystal Gray Mineral Umber
9mm Mosaics			
SHEET SIZE	TYPE	FINISH	COLORS
12"x12"	2"x2" Mosaic	Matte	Bedrock Beige Crystal Gray Mineral Umber
12"X12"	3" Hex	Matte	Bedrock Beige Crystal Gray Mineral Umber
9mm Trim Piece			
SHEET SIZE	TYPE	FINISH	COLORS
4"x12"	Bullnose	Polished	Bedrock Beige Crystal Gray Mineral Umber

MADE TO ORDER FIELD TILES AND MOSAICS:

Minimum quantity required. Contact your sales representative for more information.


This represents a small portion of the mosaic patterns we offer.
We can cut any field tile to create a custom mosaic or field tile size as specified.

FIELD TILES		CUBES		BASKETWEAVE	
	Any 24" field tile can be cut down to a smaller size in any length and width combination with a 1" minimum.		2" 4"		1 3/8"x3" 2"x4"
		BRICKS		DIAMONDS	
			1"x2" 1"x3" 1 3/8"x3" 2"x4"		2"
FIELD SHAPES*		CHEVRONS		HERRINGBONE	
 Half Hexagon	6.7" Base		2"x12"		1"x2" 2"x4" 5/8"x4"
 Diamond	4"				
 Hexagon	6"	OCTAGONS		HEXAGONS	
 Chevron	2"x12" 6"x24"		2" w/ 0.6" Squares		1 1/8" 2"
TRAPEZOID W/ DOT		SQUARES		RECTANGLES	
	4"x2 1/2" w/ 5/8" Dot		1"x1" 1 3/8"x1 3/8"		1"x2" 1"x4"

*Other sizes available upon request
All Sizes are Nominal.



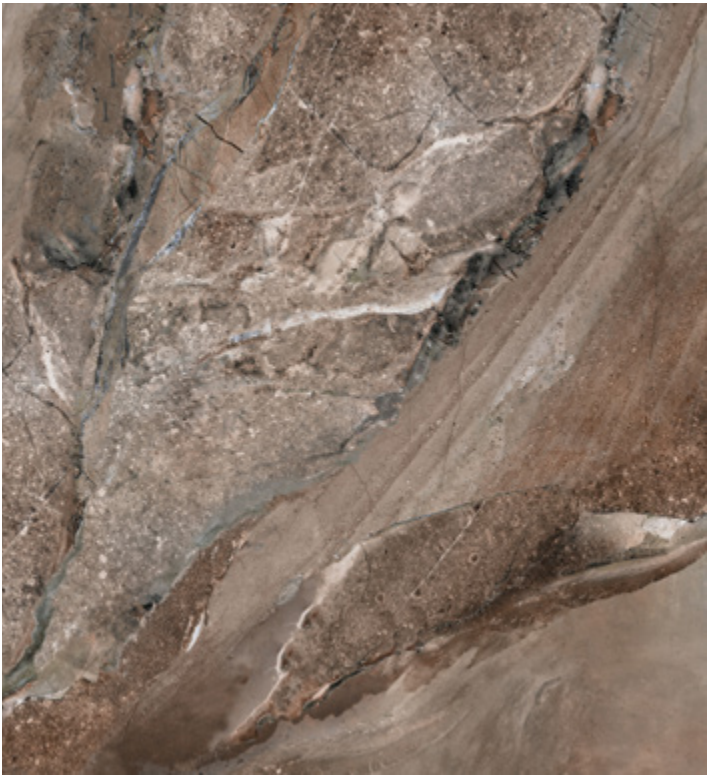Bedrock Beige



Mineral Umber



Crystal Gray

Colors shown may vary from actual product. Final selection should be made from actual product samples.


2”X2” MOSAIC



Bedrock Beige



Crystal Gray



Mineral Umber


3” HEX MOSAIC



Bedrock Beige



Crystal Gray



Mineral Umber



24”x48” Field Tile in Light Grey



NEOLITH
Glazed Porcelain Tile

Features	Test Method	Value	
		Matte	Polished
Water Absorption	ASTM C373	< 0.5%	
Abrasion Resistance	ASTM C1027	Class 3	
MOHS	Scratch Hardness 1 - 10	7	3
Breaking Strength	ANSI C648	≥ 425	
Chemical Resistance	ASTM C650	Class A	Class C
Thermal Shock Resistance	ASTM C484		
Frost Resistance	ASTM C1026	Resistant	
DCOF (WET)	ANSI A 326.3	≥ 0.42	-

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8” wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16” wide. Please refer to TCNA guidelines for more on grout recommendations.

Product Info:

- Glazed Porcelain Tile
- Matte | Polished Finishes
- 9mm Thickness
- Rectified Edge
- PEI Rating = 3
- V3 - Moderate Variation
- Frost Resistance = Yes



Contact your sales representative for more information. All material must be inspected prior to installation. Absolutely no claims will be accepted after installation.

