

08551000 - 1.3 Common Rail Twin Injector Puller Attachment

INSTRUCTIONS GUIDE

The joining bracket between the injectors greatly hinders individual removal and this tool allows the user to remove them in pairs.


Remove solenoids from the two injectors to be pulled and then screw the two adaptors onto the outside of the injectors followed by the pulling beam which is bolted into position.

A slide hammer or hydraulic injector remover can then be used to remove the injectors.



APPLICATIONS

Make	Model	Year	Code
Alfa Romeo	Mito	08-	199A3000
Fiat	500	07-	169A1.000
Fiat	500C	09-	169A1.000
Fiat	Doblo	05-10	199A2.000
Fiat	Doblo	10-	263A2.000
Fiat	Doblo	10-	199A3.000
Fiat	Doblo/Cargo	05-10	199A2.000
Fiat	Doblo/Cargo	10-	199A3.000
Fiat	Doblo/Cargo	10-	263A2.000
Fiat	Fiorino	08-	199A2.000
Fiat	Grand Punto	05-	199A2.000
Fiat	Grand Punto	05-	199A3.000
Fiat	Idea	05-	199A3.000
Fiat	Linea	07-	199A3.000
Fiat	Panda	06-	169A1.000
Fiat	Punto Evo	09-	199A2.000
Fiat	Punto Evo	09-	199A9.000
Fiat	Qubo	08-	199A2.000
Ford	KA	09-	FD4
Lancia	Musa	06-	199A3.000
Lancia	Ypsilon	06-	199A2.000
Lancia	Ypsilon	06-	199A3.000
Opel/GM	Agila B	08-	D13A
Opel/GM	Agila B	08-	Z13DTJ
Opel/GM	Astra H	05-	Z13DTH
Opel/GM	Corsa-D	06-	Z13DTJ
Opel/GM	Corsa-D	10-	A13DTC
Opel/GM	Corsa-D	07-	Z13DTH
Opel/GM	Meriva	03-	Z13DTJ

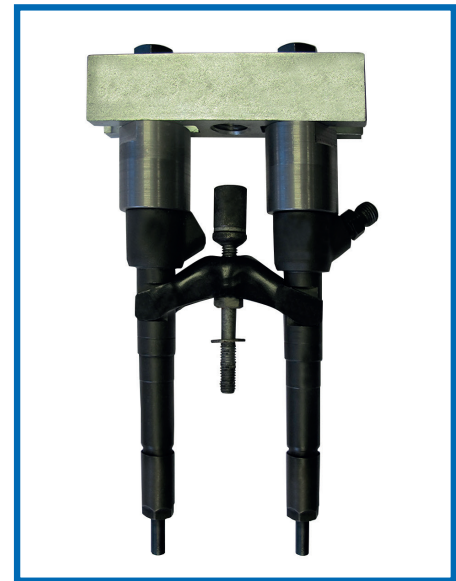

OPTIONAL EXTRAS

08580470

Slide Hammer Converter M18 male x 5/8 unf female



08530700

Slide Hammer

NOTE: WILL REQUIRE CONVERTER ABOVE TO WORK WITH THIS TOOL

