



## OIL FILTER WRENCH KIT 60-80MM WITH EXTENSION



- The wrench is equipped with 2 extension half-shells (toothed on the inside), which are attached directly to the jaws of the filter wrench and can be secured in place.
- It can therefore be used with or without extensions.

**PLUS**

TO LOOSEN AND TIGHTEN FUEL FILTERS WITH FOOT VALVES AND OIL FILTERS.

Symmetrical surfaces



Asymmetrical surfaces



Symmetrical grooves



Round






**ADDITIONAL ADVANTAGES OF THE KEY VERSION**

CONTINUOUS ADJUSTMENT WITH SELF-TENSIONING EFFECT (SPRING MECHANISM)

SUITABLE FOR RIGHT AND LEFT-HAND CLAMPING

TOOTHED JAWS ENSURE OPTIMAL CLAMPING BY FRICTION

DOUBLE CONNECTION = 1/2" - INNER SQUARE AND OUTER HEXAGONAL SOCKET SW21 MM

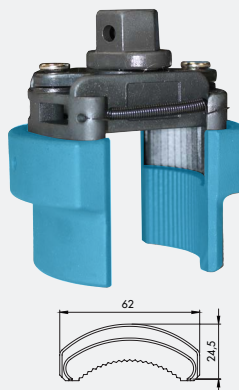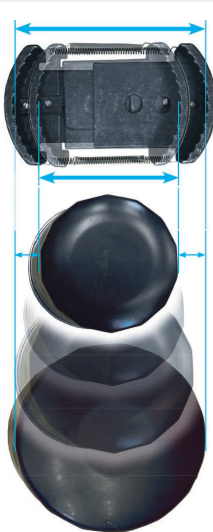

**GO** CODE **605**  
with 5 pcs. 0,83 kg