

## CP01 Series Canopy Light

Parking Garage & Entryway

### OVERVIEW

<b>Wattage (W)</b>	30W, 45W, 63W 63/45/30W Selectable
<b>Lumen Package (lm)</b>	Up to 8,505 lumens
<b>Color Temperature (CCT)</b>	4000K, 5000K, or 4000K/5000K Selectable
<b>Efficacy (lm/W)</b>	135 lm/W




### DETAILS

This CP01 Series Canopy Light is highly cost-effective and offers complete configurations between three wattages and two color temperatures to choose from.

#### KEY FEATURES

- Lumen Output Up to 8,505 lm
- CCT & Power Selectable
- Photocell or Microwave Sensor Optional
- Quick mount plate for surface or junction box mounting
- Durable Aluminum housing with four 1/2" NPT side conduit entries

#### DIP SWITCH

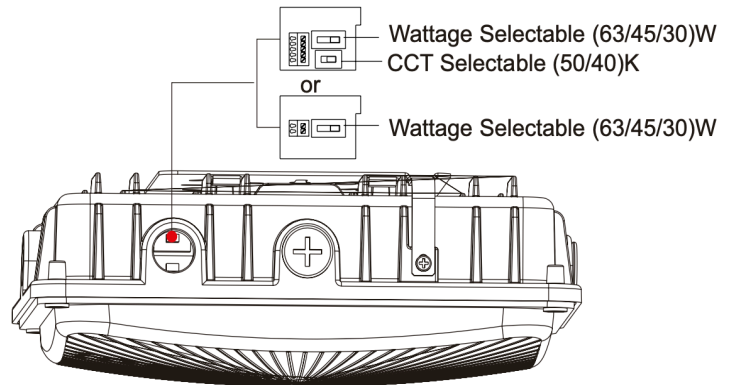

### APPLICATIONS

- Parking Garages
- Storage Areas
- Shopping Area Walkways
- Entryways

# CP01 Series Canopy Light

Parking Garage & Entryway

## SPECIFICATIONS

<b>Wattage &amp; Lumens</b>	30W, 4,050 lumens 45W, 6,120 lumens 63W, 8,505 lumens 63W Selectable (63/45/30W), Up to 8,505 lumens
<b>Efficacy</b>	135 lm/W
<b>CCT</b>	4000K, 5000K, or 4000K/5000K Selectable
<b>CRI (Ra)</b>	>70
<b>Controls</b>	0-10V Dimming CCT & Power Selectable Exterior Photocell Motion Sensor
<b>Input Voltage</b>	120-277VAC or 120-347VAC, 50/60Hz
<b>Power Supply</b>	Fahold
<b>Driver Type</b>	Constant Current (CC)
<b>Power Factor</b>	>0.9
<b>LED Type</b>	LED 2835
<b>Average Lifetime</b>	L90: 44,000 hours L70: 54,000 hours
<b>Beam Angle</b>	150°
<b>Mounting</b>	Surface Mount, Pendant Mount* *Pendant Mount via 3/4" NPT pipe (not supplied)
<b>Operating Temperature</b>	-40°C to +45°C (-40°F to +113°F)
<b>Material</b>	Die-cast Aluminum Housing Heat-resistant Polycarbonate Lens
<b>Fixture Color</b>	Bronze
<b>Finish</b>	Powder Coating
<b>Surge Protection</b>	4kV line-line, 6kV line-earth
<b>IP Rating</b>	IP65
<b>IK Rating</b>	IK08
<b>Certifications</b>	DLC Premium, UL
<b>Warranty</b>	5 Years

## CP01 Series Canopy Light

Parking Garage & Entryway


### ORDERING GUIDE

Example: **LLTVCP01-030D-40-PCMM**

SKU Root	Wattage / Lumens	CCT	Sensors	Voltage
<b>LLTVCP01</b>	<b>-030D</b> - 30W 0-10V Dimming, 4,050 lumens <b>-045D</b> - 45W 0-10V Dimming, 6,120 lumens <b>-063D</b> - 63W 0-10V Dimming, 8,505 lumens <b>-063W</b> - 63/45/30W Selectable & 0-10V Dimming, Up to 8,505 lumens	<b>-40</b> - 4000K <b>-50</b> - 5000K <b>CS</b> - Color Selectable	<b>BLANK</b> - None <b>-PC</b> - Photocell <b>-MM</b> - Microwave Motion Sensor <b>-PCMM</b> - Photocell & Microwave Motion Sensor	<b>BLANK</b> - 120-277VAC Standard <b>-347</b> - 120-347VAC

### PRODUCT DIMENSIONS

DIMENSIONS	30W/45W/63W
Product Dimension	9.53" x 9.53" x 3.39"
Luminaire Net Weight	3.62 lbs
Export Carton Size	11.7" x 11.7" x 9.1"

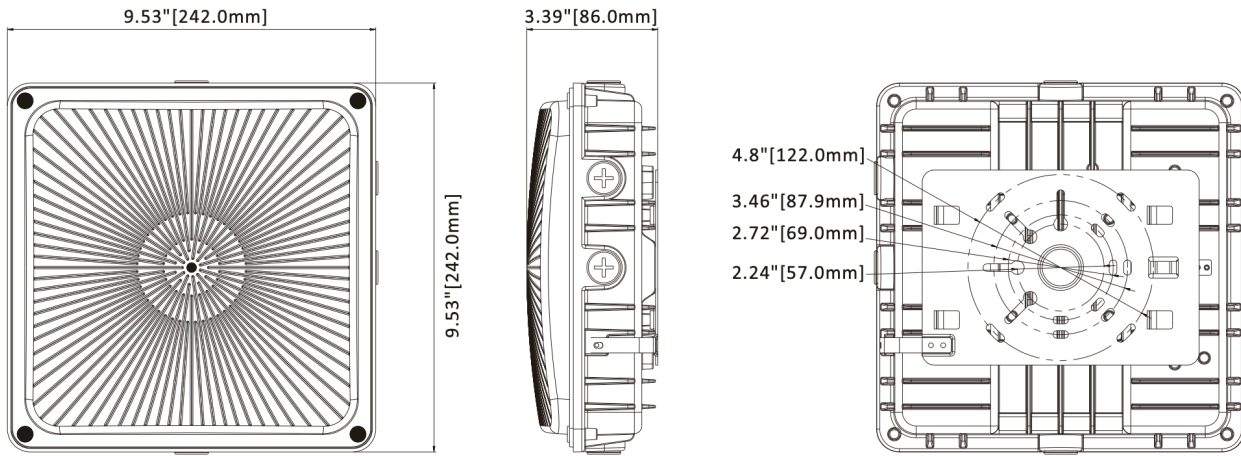


# CP01 Series Canopy Light

Parking Garage & Entryway

## PERFORMANCE

Model	CRI	Wattage	4000K		5000K	
			Lumens	Efficacy	Lumens	Efficacy
LLTVCP01-030D-XX	>70	30	4,500	150	4,620	154
LLTVCP01-045D-XX	>70	45	6,120	136	6,210	138
LLTVCP01-063D-XX LLTVCP01-063W-XX LLTVCP01-063WCS	>70	63	8,505	135	8,568	136

## PHOTOMETRICS

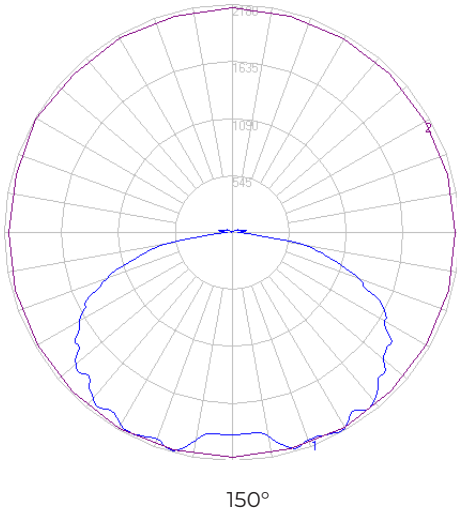

## MOUNTING



Surface Mount



Pendant Mount