

WPF Series Full-Cutoff Wall Pack

Outdoor Full-Cutoff Wall-Mounted Area Luminaires

OVERVIEW

Wattage (W)	26W, 38W, 65W, 100W, 135W 26/22/15/11W Selectable 38/31/23/17W Selectable 65/50/34/24W Selectable 100/84/62/43W Selectable
Lumen Package (lm)	Up to 20,000 lm
Color Temperature (CCT)	3000K, 4000K, 5000K, or 3000K/4000K/5000K Selectable
Efficacy (lm/W)	Up to 158 lm/W




DETAILS

This LED Full Cutoff Wall Pack is available in small and large sizes, with wattages ranging from 26W to 135W. With its uniform light distribution and impressive LED lumen maintenance rate, it provides high energy efficiency at a low cost. This fixture also has on-site dimmable output and CCT settings, allowing the contractor to set the lumen value at the work site.

KEY FEATURES

- Lumen Output Up to 20,000 lm
- CCT & Power Selectable Options
- Dark Sky Compliance
- Photocell, Emergency Backup & 480VAC Options Available

POWER AND CCT SELECTABLE VERSION

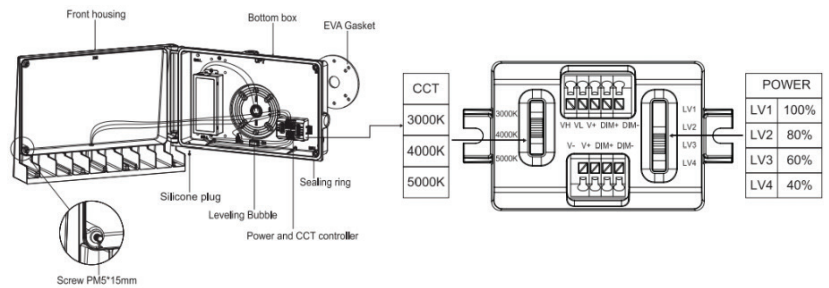

APPLICATIONS

- Warehouse Exterior
- Office Building Exterior
- Healthcare Location Exterior
- Commercial Space Exterior

WPF Series Full-Cutoff Wall Pack

Outdoor Full-Cutoff Wall-Mounted Area Luminaires

SPECIFICATIONS

Wattage & Lumens	26W, Up to 3,900 lumens 38W, Up to 5,700 lumens 65W, Up to 9,700 lumens 100W, Up to 15,000 lumens 135W, Up to 20,000 lumens 26W Selectable (26/22/15/11W), Up to 4,000 lumens 38W Selectable (38/31/23/17W), Up to 6,000 lumens 65W Selectable (65/50/34/24W), Up to 10,000 lumens 100W Selectable (100/84/62/43W), Up to 15,500 lumens
Efficacy	Up to 158 lm/W
CCT	3000K, 4000K, 5000K, or 3000K/4000K/5000K Selectable
CRI (Ra)	70
Controls	1-10V Dimming CCT & Power Selectable Photocell
Input Voltage	120-277VAC / 347-480VAC, 50/60Hz
Power Factor	>0.90
Average Lifetime	L70: 50,000 hours
Mounting	Wall Mount, Junction Box Mount, ½" NPS Conduit mount
Operating Temperature	-40°C to +40°C (-40°F to +140°F) Emergency Battery: +10°C to +40°C (+50°F to +104°F)
Emergency Driver	8W Emergency Driver (Only for 26W & 65W)
Battery	90 Minute-Discharge, 24-Hour Recharge
Material	Die Cast Aluminum Housing, Anti-UV Optical Lens
Fixture Color	Dark Bronze (Standard), Black, White
Certifications	DLC, UL
Warranty	5 Years

WPF Series Full-Cutoff Wall Pack

Outdoor Full-Cutoff Wall-Mounted Area Luminaires

ORDERING GUIDE

 Example: **LLTVWPF-026D-30**

SKU Root	Wattage / Lumens	Driver Type	CCT	Sensor
LLTVWPF-	026 - 26W, Up to 3,900 lumens 038 - 38W, Up to 5,700 lumens 065 - 65W, Up to 9,700 lumens 100 - 100W, Up to 15,000 lumens 135 - 135W, Up to 20,000 lumens	D - 1-10V Dimming	-30 - 3000K -40 - 4000K -50 - 5000K	Blank - None PC - Photocell Sensor <i>(120-277VAC only)</i>
	026 - 26W Selectable, Up to 4,000 lumens 038 - 38W Selectable, Up to 6,000 lumens 065 - 65W Selectable, Up to 10,000 lumens 100 - 100W Selectable, Up to 15,500 lumens	W - Wattage Selectable	CS - 3000K/4000K/5000K Selectable	

Voltage	Emergency	Fixture Color
Blank - 120-277VAC -480 - 347-480VAC <i>(Only 65W, 100W)</i>	Blank - None -E - Emergency <i>(Only for 26W & 65W)</i>	Blank - Bronze <i>(Standard)</i> BK - Black WT - White

WPF Series Full-Cutoff Wall Pack


Outdoor Full-Cutoff Wall-Mounted Area Luminaires

PRODUCT DIMENSIONS

DIMENSIONS	Small Size	Large Size
Product Dimension	243 x 332.5 x 98 mm (9.6" x 13.1" x 3.8")	243 x 334.5 x 126 mm (9.6" x 13.2" x 5")


Small Size:

For 26W, 38W, 65W CCT Selectable; For 26W, 38W, 65W, 100W, 135W Single CCT

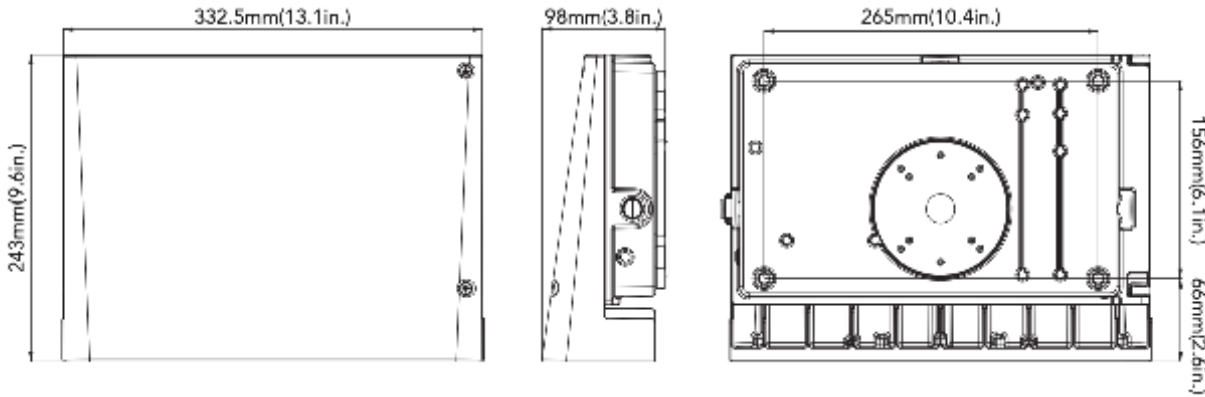

Large Size:

For 100W Wattage & CCT Selectable

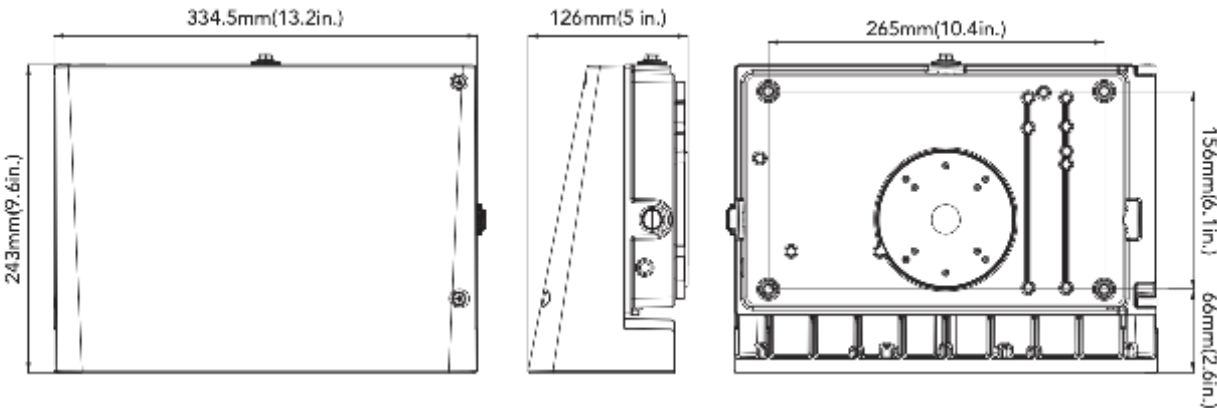

WPF Series Full-Cutoff Wall Pack

Outdoor Full-Cutoff Wall-Mounted Area Luminaires

PERFORMANCE

Model	CRI	Wattage	3000K		4000K		5000K	
			Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy
LLTVWPF-026D-XX	70	26	3,800	146	3,900	150	3,900	150
LLTVWPF-026WCS	70	26	3,800	146	4,000	154	3,900	150
LLTVWPF-038D-XX	70	38	5,600	147	5,700	150	5,700	150
LLTVWPF-038WCS	70	38	5,600	147	6,000	158	5,700	150
LLTVWPF-065D-XX	70	65	9,500	146	9,700	149	9,700	149
LLTVWPF-065WCS	70	65	9,500	146	10,000	154	9,700	149
LLTVWPF-065D-XX-480	70	65	9,400	145	9,500	146	9,500	146
LLTVWPF-065WCS-480	70	65	9,400	145	9,900	152	9,500	146
LLTVWPF-100D-XX	70	100	14,800	148	15,000	150	15,000	150
LLTVWPF-100WCS	70	100	14,800	148	15,500	155	15,000	150
LLTVWPF-100D-XX-480	70	100	14,000	140	14,500	145	14,500	145
LLTVWPF-100WCS-480	70	100	14,000	140	15,000	150	14,500	145
LLTVWPF-135D-XX	70	135	19,000	141	20,000	148	20,000	148

PHOTOMETRICS

