




RT3S1

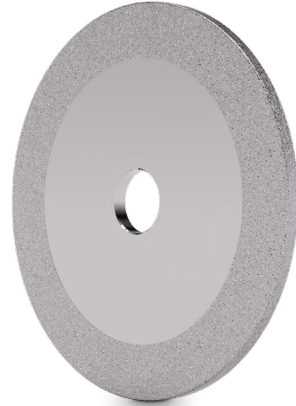

Specifications

Model Number	RT3S1
Profile Types	Cylinder Glands & Grooves
Works With	Dremel, Drill, Die Grinder (when used with RTC1)
Shank Size	1/8 inch (3.2 mm)
Head Diameter	0.984 inch (25 mm)
Mandrel Used	RTM3
Minimum Working ID	1 inch (25.4 mm)
Maximum Working OD	No Limit
Thickness of Disc	0.040 inch (1 mm)
Profile	Square
RPM	Recommended 12,000 (Max 15,000)
Lube Recommend	Dry, Light Oil, or Mineral Spirits
PPE	Safety Glasses, Goggles, or Shield
Accessories	RTC1

ID = Inner Diameter • OD = Outer Diameter • RPM = Revolutions Per Minute • Metric measurements are the most actual sizes, inch measurements shown are rounded with the exception of arbor diameter • Lube will help flush area and prolong tool life • Non-flammable lubes are recommended. • PPE = Personal Protective Equipment

For safety, usage instructions, tips, videos, demos, and warranty details see additional resources online.

WARNING: This product may including Lead and/or Nickel, which are classed as P65 Warning for the state of California.
For more information: www.P65WARNINGS.ca.gov

www.rotarythread.com
PAT. US 10,183,372,B2



DREMEL / DRILL



WEAR SAFETY GOGGLES
USAR LENTES DE SEGURIDAD
PORTER DES LUNETTES DE SÉCURITÉ