


TECHNICAL DATA SHEET	
TEKA Royal	
CONSTRUCTION	
Product Type	Multilayer Wood Flooring
Surface Layer Dimension	180 x 2,200 mm – 7" x 86.6"
Total Thickness	14 mm – 9/16"
Top Layer	Sawn-cut veneer, temperate hardwood species
	Full / single-piece face THK 3.0 mm nominal
Middle Layer	Plywood base THK 11.0 mm, mill option
	Hevea - local plantation hardwood species
Back Layer	none
Bonding	Low formaldehyde emission / E1 class glue
Moisture Content	7% ± 1%
Edge Preparation	Tongue and Groove, Bevel: Big bevel all side for Handscraped item Micro bevel on all sides (0.75mm) for non Handscraped item
Installation Method	Glue-less floating, Glue down
ROYAL 	

DIMENSIONAL TOLERANCES	
Length	± 1.0 mm
Width	± 0.10 mm
Thickness	± 0.20 mm
Overwood / Height Difference	max 0.20 mm
Squareness	max 0.20 mm

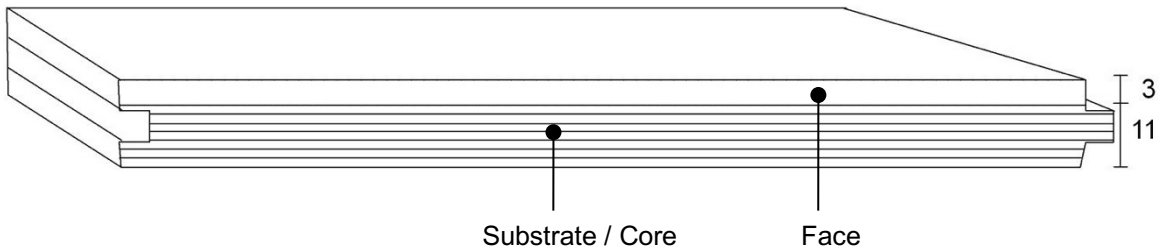

Gap between planks	max 0.30 MM		
Flatness	max 1% of length (bowing)		
SURFACE FINISH			
Coating Type	Extreme Matt Lacquered		
Texture			
Specular Gloss	5% ± 5%		
Putty Color	Black for all colors except Kensington Light and dark brown for Kensington		
Commercial name & Detail			
Windsor	Carbonized Handscraped Euro, White Wash Extreme White Matt Lacquered		
Buckingham	Dark Carbonized, Deep Brush, White Wash, Extreme White Matt Lacquered		
Oxford	Carbonized, Brush, Extreme Matt Lacquered		
Kensington	Brush, White Wash, Extreme White Matt Lacquered		
STANDARD PACKING			
Packaging Type	Banderoll carton, shrink wrapped		
Content	6 layers of planks with assorted lengths		
	Min 3 Layers of Full lengths		
	max 2 layers of 2 pcs starter board with min 900 mm length, or		
	max 1 layer of 3 pcs starter board with min 600 mm length allowed		
Footage	1 bundle	6 board layers	2.376 m ²
	1 pallet	55 bundles	130.68 m ²
	40 ft Container	12 pallets	1,568 m ²