


DATASHEET



VS267-3.1A / VS279-3.1A / V279-4.8A

White 13A Switched USB Socket

www.thrion.co.uk

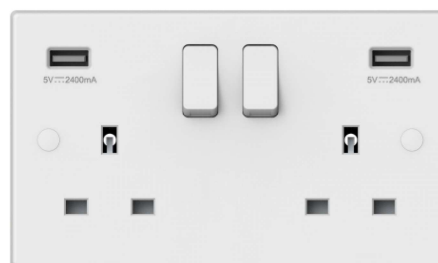

PART CODE	VS267-3.1A	VS279-3.1A	VS279-4.8A
DESCRIPTION	1Gang 13A DP Switched USB Socket (Type A+A)3100mA (Total)	2Gang 13A DP Switched USB Socket (Type A+A)3100mA (Total)	2Gang 13A DP Switched USB Socket (Type A+A)4800mA (Total)
CHARACTERISTICS OF THE USB	Type A only : 5V 3.1A Type C only : 5V 3.1A Type A+C : 5V 3.1A Total Max Power : 15.5W		Type A only : 5V 3.1A Type C only : 5V 3.1A Type A+C : 5V 4.8A Total Max Power : 24W
	Short-Circuit Protection Overload Protection		Low Power Standby
FINISH	White		
MINIMUM MOUNTING DEPTH (MM)	25		
DIMENSIONS (MM)	Height: 86	Width: 86	Plate Thickness: 10
INPUT VOLTAGE	Mains 250V a.c.		
MAXIMUM LOAD (A)	13		
TERMINAL CAPACITY	3 x 2.5mm ² or 3 x 4mm ² or 2 x 6mm ²		
IP RATING	IP 20		
WARRANTY	3 years		
DECLARATION OF CONFORMITY (HELD ON FILE)	Yes		
MANUFACTURED IN ACCORDANCE WITH	BS 1363-2		